REAR WIPER ARM (Continued)

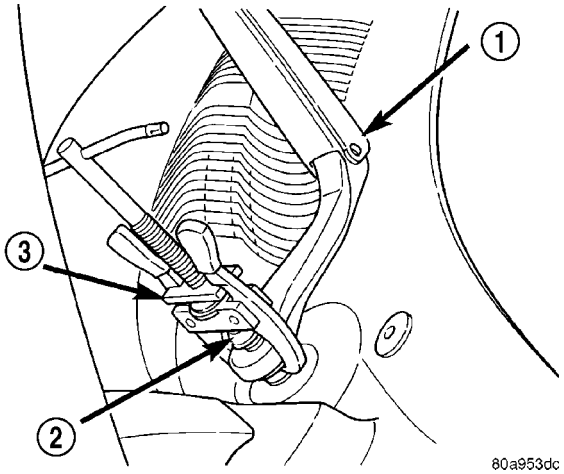

Fig. 14 Wiper Arm Puller - Typical

1 - WIPER ARM
2 - WIPER PIVOT
3 - BATTERY TERMINAL PULLER

(1) The rear wiper arm must be indexed to the rear wiper motor output shaft with the motor in the park position to be properly installed. Position the rear wiper arm pivot end onto the motor output shaft so that the wiper blade is parallel to the lower edge of the upper liftglass blackout area (Fig. 15).

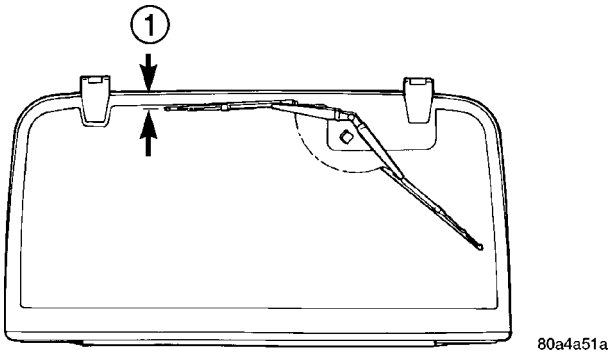

Fig. 15 Rear Wiper Arm Installation

1 - LIFTGLASS BLACKOUT AREA

(2) Once the wiper blade is indexed to the rear wiper motor output shaft, lift the rear wiper arm to its over-center position to hold the wiper blade off of the glass and relieve the spring tension on the wiper arm to rear wiper motor output shaft connection. Using hand pressure, push the tapered hole in the pivot end of the wiper arm down firmly and evenly over the rear wiper motor output shaft (Fig. 13).

(3) Install and tighten the nut that secures the wiper arm to the rear wiper motor output shaft. Tighten the nut to 12 N·m (9 ft. lbs.). **Do not overtighten.**

(4) Gently lower the wiper arm until the wiper blade rests on the glass.

(5) Wet the liftglass, then operate the rear wiper. Turn the wiper switch to the Off position, then check for the correct wiper arm position and readjust as required.

REAR WIPER BLADE

DESCRIPTION

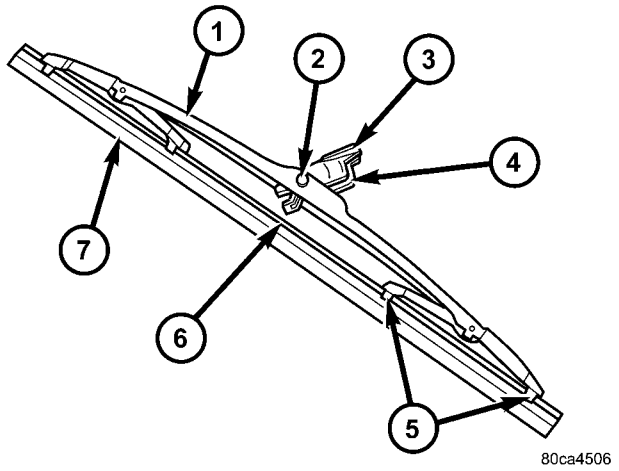

Fig. 16 Rear Wiper Blade

1 - SUPERSTRUCTURE
2 - PIVOT PIN
3 - LATCH RELEASE
4 - PIVOT BLOCK
5 - CLAW
6 - FLEXOR
7 - ELEMENT

The rear wiper blade is secured by an integral latching pivot block to the hook formation on the tip of the rear wiper arm, and rests in a horizontal position on the glass near the top of the liftglass when the wiper is not in operation (Fig. 16). The wiper blade consists of the following components:

- **Superstructure** - The superstructure includes a stamped steel bridge and plastic links with claw formations that grip the wiper blade element. Also included in this unit is the latching, molded plastic pivot block that secures the superstructure to the wiper arm. All of the metal components of the wiper blade have a satin black finish applied.
- **Element** - The wiper element or squeegee is the resilient rubber member of the wiper blade that contacts the glass.
- **Flexor** - The flexor is a rigid metal component running along the length of each side of the wiper element where it is gripped by the claws of the superstructure.

All models with the optional rear wiper and washer system have a single 46.00 centimeter (18.00 inch) rear wiper blade with a non-replaceable rubber element (squeegee). The wiper blade cannot be