FRAME (Continued)

Frame components that have been damaged should be inspected for cracks before returning the vehicle to use. If cracks are found in accessible frame components perform the following procedures.

(1) Drill a hole at each end of the crack with a 3 mm (O.125 in.) diameter drill bit.

(2) Using a suitable die grinder with 3 inch cut off wheel, V-groove the crack to allow 100% weld penetration.

(3) Weld the crack.

(4) If necessary when a side rail is repaired, grind the weld smooth and install a reinforcement channel (Fig. 4) over the repaired area.

CAUTION: A reinforcement should never be used on the front section of the frame. The frame section forward of the suspension mounts contains energy management holes (Fig. 5). Reinforcing this area may effect energy management.

NOTE: If a reinforcement is required, it should completely cover the repaired area. The reinforcement should also overlap the top and bottom of the frame by more than 50% of its width. Weld as indicated (Fig. 4).

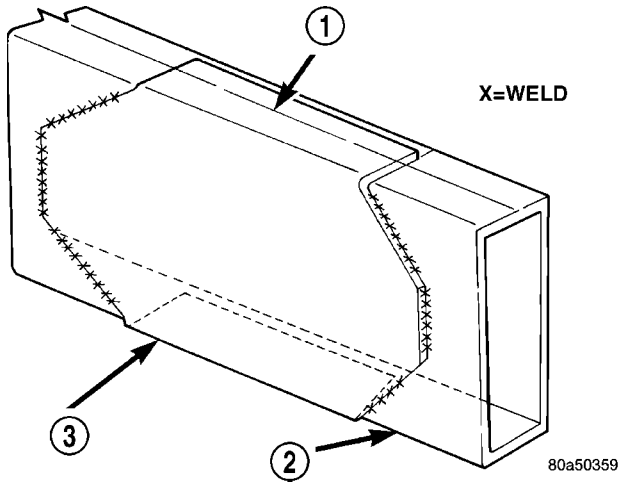

Fig. 4 FRAME REINFORCEMENT

1 - FRAME CENTER LINE
2 - FRAME
3 - FRAME REPAIR REINFORCEMENT

FRAME FASTENERS

Bolts and nuts can be used to repair frames or to install a reinforcement section on the frame.

Conical-type washers are preferred over the split-ring type lock washers. Normally, grade-5 bolts are adequate for frame repair. **Grade-3 bolts or softer should not be used.** Tightening bolts/nuts with the correct torque, refer to the Introduction Group at the front of this manual for tightening information.

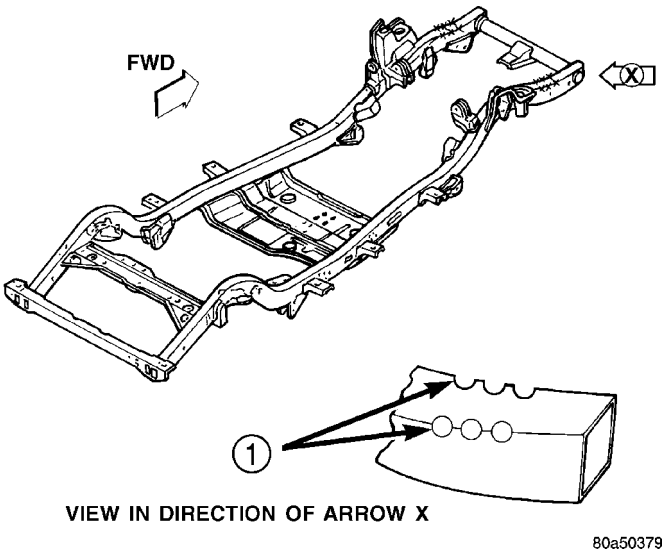

Fig. 5 ENERGY MANAGEMENT HOLES

1 - ENERGY MANAGEMENT HOLES

SPECIFICATIONS

FRAME DIMENSIONS

Frame dimensions are listed in metric scale. All dimensions are from center to center of Principle Locating Point (PLP), or from center to center of PLP and fastener location.

VEHICLE PREPARATION

Position the vehicle on a level work surface. Using screw or bottle jacks, adjust the vehicle PLP heights to the specified dimension above a level work surface. Vertical dimensions can be taken from the work surface to the locations indicated were applicable.

INDEX

DESCRIPTION	FIGURE
FRAME SIDE VIEW	6
FRAME TOP VIEW	7
FRAME SIDE VIEW LWB	8
FRAME TOP VIEW LWB	9