FUEL TANK (Continued)

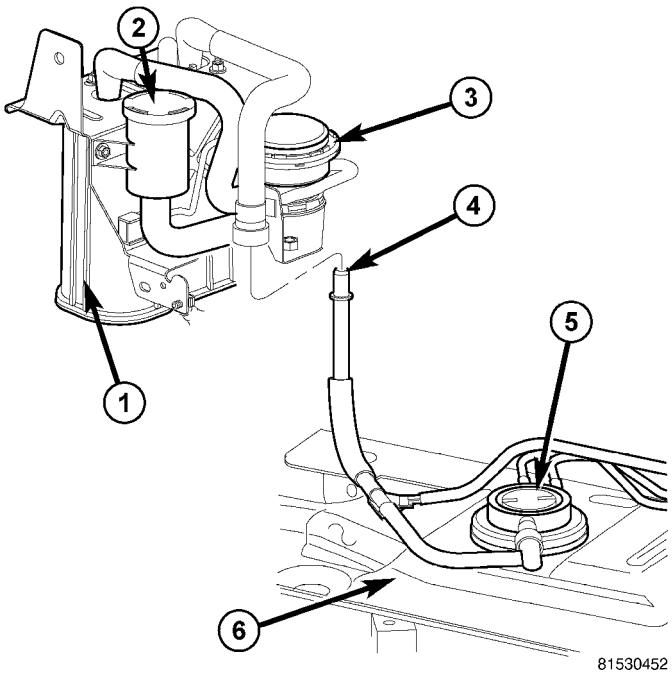

Fig. 19 ORVR VAPOR LINE

1 - EVAP CANISTER
2 - NVLD FILTER
3 - NVLD PUMP
4 - VAPOR LINES
5 - FLOW VALVE
6 - TOP OF FUEL TANK)

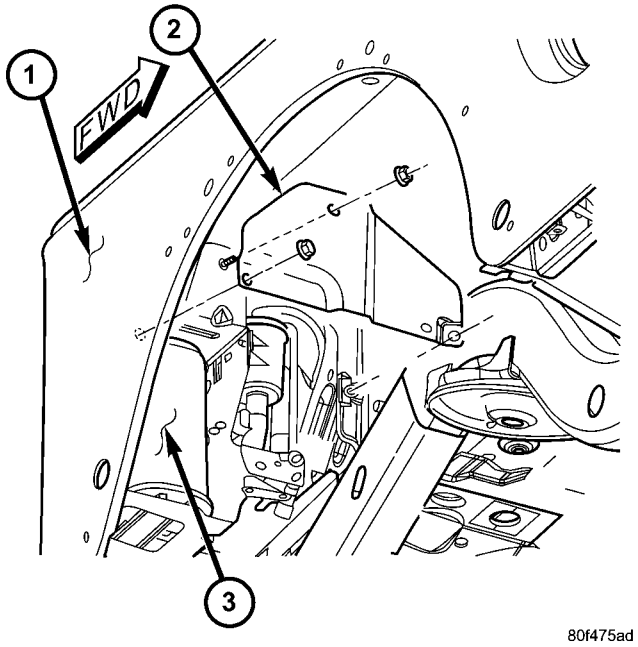

Fig. 20 EVAP CANISTER / NVLD PUMP LOCATION

1 - RIGHT / REAR FENDER (WHEELHOUSE)
2 - BRACKET
3 - EVAP CANISTER

(9) Carefully connect the vapor line (4) (Fig. 19). Be very careful not to bend or kink the vapor lines. If lines leak, a Diagnostic Trouble Code (DTC) will be set.

(10) Install EVAP canister bracket (2) (Fig. 20).

(11) Install wheelhouse liner at right/rear wheel.

(12) Install right/rear tire/wheel.

(13) Connect electrical connector at of fuel tank.

(14) Connect vapor line at left/front of fuel tank.

(15) Connect quick-connect fitting to fuel supply fitting (2) (Fig. 21). Refer to Quick-Connect Fittings in this group for procedures.

(16) Use a new plastic tie wrap to secure rear axle vent hose to fuel fill hose.