TRANSFER CASE - NV241

TABLE OF CONTENTS

page

TRANSFER CASE - NV241
DESCRIPTION 201
OPERATION 201
DIAGNOSIS AND TESTING - TRANSFER CASE 202
REMOVAL 203
DISASSEMBLY 203
CLEANING 214
INSPECTION 214
ASSEMBLY 215
INSTALLATION 226
SPECIFICATIONS TRANSFER CASE - NV241 227
SPECIAL TOOLS TRANSFER CASE - NV241 227
REAR EXTENSION SEAL
REMOVAL 229
INSTALLATION 229
FLUID
STANDARD PROCEDURE - FLUID DRAIN AND FILL 229

page

FRONT OUTPUT SHAFT SEAL
REMOVAL 229
INSTALLATION 230
POSITION SENSOR
DESCRIPTION 231
OPERATION 231
REMOVAL 231
INSTALLATION 231
SHIFT LEVER
REMOVAL 232
INSTALLATION 233
ADJUSTMENTS - SHIFT LINKAGE 233
VEHICLE SPEED SENSOR
DESCRIPTION 233
OPERATION 233
REMOVAL 234
INSTALLATION 234

TRANSFER CASE - NV241

DESCRIPTION

The NV241 transfer case (Fig. 1) is a part-time transfer case with a low-range gear system. It provides three operating ranges plus a NEUTRAL position. The low range position provides a gear reduction ratio of 4.0:1 for increased low speed torque capability.

The gear cases, retainer and extension are all of aluminum. Drive sprockets and an interconnecting drive chain are used to transmit engine torque to the front/rear propeller shafts. The mainshaft, input gear and front output shaft are supported by ball and needle bearings.

IDENTIFICATION

An identification tag (Fig. 2) is attached to the rear case of every transfer case. The tag provides the transfer case model number, assembly number, serial number, and low range ratio.

The transfer case serial number also represents the date of build.

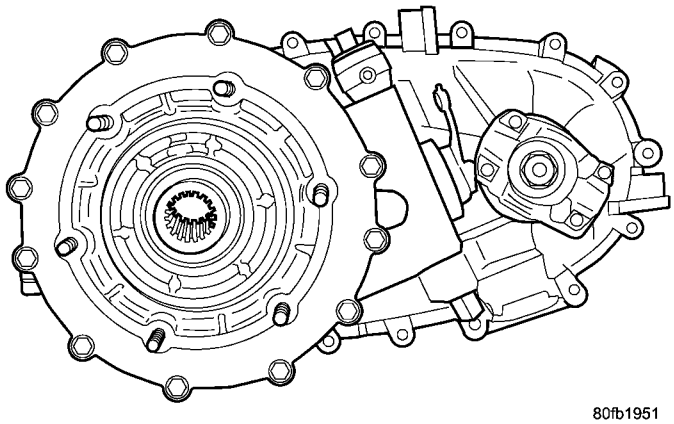

Fig. 1 NV241 - Front View

OPERATION

OPERATING RANGES

Transfer case operating ranges are:

- 2H (2-wheel drive)
- 4H (4-wheel drive)
- 4LO (4-wheel drive low range

The 2H range is for use on any road surface at any time.