TIRES/WHEELS (Continued)

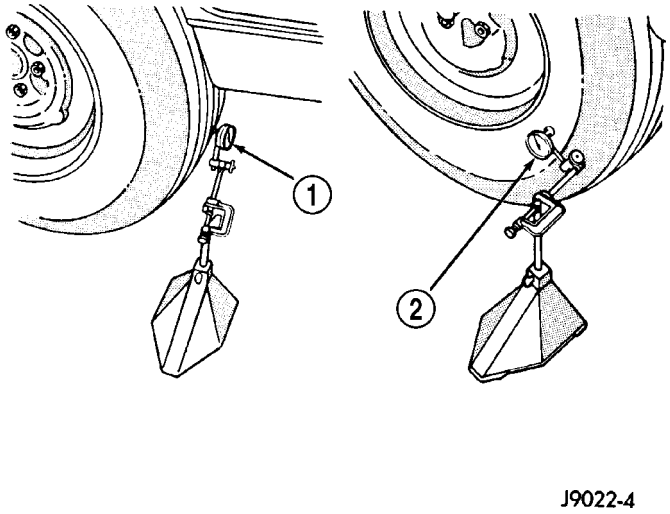

Fig. 1 Checking Tire/Wheel/Hub Runout

1 - RADIAL RUNOUT
2 - LATERAL RUNOUT

(1) Remove tire from wheel and mount wheel on service dynamic balance machine.

(2) Check wheel radial runout (Fig. 2) and lateral runout (Fig. 3).

- STEEL WHEELS: Radial runout 0.040 in., Lateral runout 0.045 in. (average-maximum)
- ALUMINUM WHEELS: Radial runout 0.030 in., Lateral runout 0.035 in. (average-maximum)

(3) If point of greatest wheel lateral runout is near original chalk mark, remount tire 180 degrees. Recheck runout or match mount, (Refer to 22 - TIRES/WHEELS - STANDARD PROCEDURE).

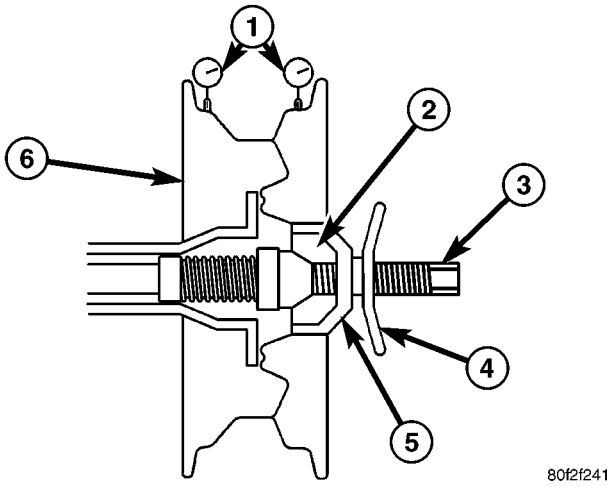

Fig. 2 RADIAL RUNOUT

1 - DIAL INDICATORS
2 - MOUNTING CONE
3 - SPINDLE SHAFT
4 - WING NUT
5 - PLASTIC CUP
6 - WHEEL

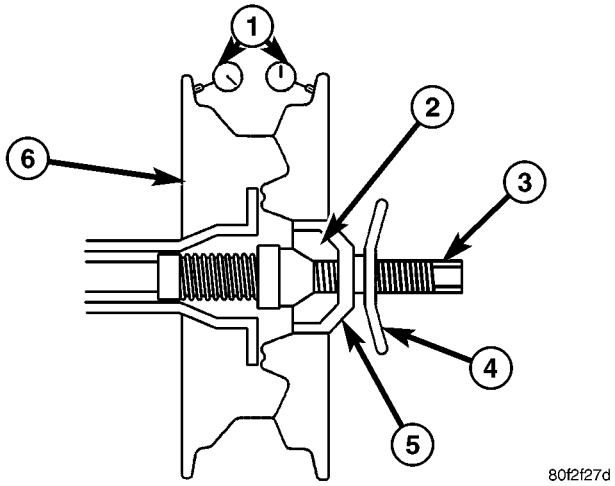

Fig. 3 LATERAL RUNOUT

1 - DIAL INDICATORS
2 - MOUNTING CONE
3 - SPINDLE SHAFT
4 - WING NUT
5 - PLASTIC CUP
6 - WHEEL

STANDARD PROCEDURE

STANDARD PROCEDURE - ROTATION

Tires on the front and rear operate at different loads and perform different steering, driving, and braking functions. For these reasons they wear at unequal rates and tend to develop irregular wear patterns. These effects can be reduced by rotating the tires at regular intervals. The benefits of tire rotation are:

- Increase tread life
- Maintain traction levels
- A smooth, quiet ride

The suggested method of tire rotation is (Fig. 4). Other rotation methods can be used, but they will not provide all the tire longevity benefits.

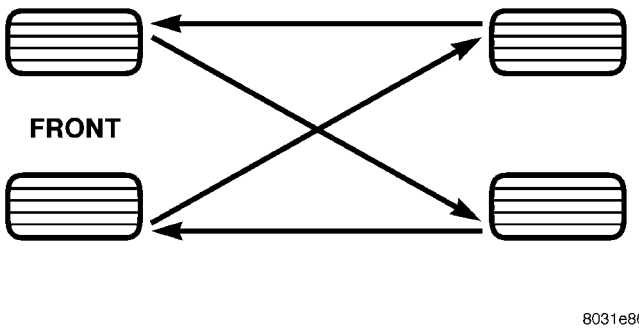

Fig. 4 Tire Rotation Pattern