COWL GRILLE AND SCREEN

REMOVAL

(1) Remove the wiper arms. (Refer to 8 - ELECTRICAL/WIPERS/WASHERS/WIPER ARMS - REMOVAL)

CAUTION: Use masking tape or equivalent on the wiper arm pivots to prevent damage to the cowl grille paint.

(2) Remove the four screws at the rear of the cowl grille.

(3) Open the hood and remove the screws that attach the cowl grille and screen to the cowl (Fig. 1).

(4) Remove the grille and screen from the cowl.

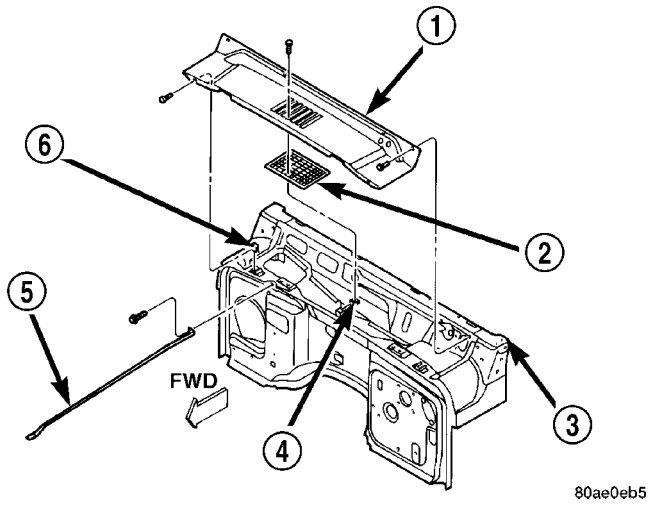

Fig. 1 COWL GRILLE AND SCREEN

1 - COWL GRILLE
2 - COWL GRILLE SCREEN
3 - COWL
4 - U NUT
5 - DASH PANEL TIE ROD
6 - U NUT

INSTALLATION

NOTE: When installing the cowl grille, ensure the snorkels on the cowl are positioned correctly and in good condition. Misaligned or damaged seals may allow water to enter the HVAC.

(1) Position the cowl screen and grille on the cowl.

(2) Install the screws that attach the grille and screen to the cowl.

(3) Remove the tape from the wiper pivots and install the wiper arms. (Refer to 8 - ELECTRICAL/WIPERS/WASHERS/WIPER ARMS - INSTALLATION)

RIGHT FRONT FENDER

REMOVAL

(1) Remove the battery tray. (Refer to 8 - ELECTRICAL/BATTERY SYSTEM/TRAY - REMOVAL)

(2) Remove the air cleaner housing.

(3) Remove the bolts attaching the Power Distribution Center (PDC) to the fender.

(4) Disengage the PDC wire harness retainers on the battery tray and fender.

(5) Move and secure the PDC.

(6) Disengage the high pressure air conditioning line retainer on the fender.

(7) Disengage the front end lighting wire harness retainers on the fender.

(8) Disengage the battery temperature sensor connector.

(9) Disengage the vacuum line at the reservoir under the battery tray reinforcement bracket.

(10) Disengage the headlamp wire connector.

(11) Route the fog lamp (if equipped), park lamp and side marker wire harness through the access hole in the fender well.

(12) If equipped, remove the fender flare extension.

(13) Remove the bolts attaching the fender to the cowl (Fig. 2).

(14) Remove the bolts attaching the fender to the battery tray reinforcement bracket.

(15) Remove the bolts attaching the fender to the grille.

(16) Separate the fender from the vehicle.

INSTALLATION

Transfer all related components. Replace harness retainers if damaged.

(1) Position the fender on the vehicle.

(2) Install the bolts attaching the fender to the grille.

(3) Install the bolts attaching the fender to the battery tray reinforcement bracket.

(4) Install the bolts attaching the fender to the cowl.

(5) If equipped, install the fender flare extension and body side molding.

(6) Route the fog lamp (if equipped), park lamp and side marker wire harness through the access hole in the fender well. Seat the grommet.

(7) Engage the headlamp wire connector.

(8) Engage the battery temperature sensor connector.

(9) Engage the vacuum line at the reservoir under the battery tray reinforcement bracket.

(10) Position the front end lighting wire harness into the retainers on the fender. Engage the retainers to secure.