LEFT FRONT FENDER (Continued)

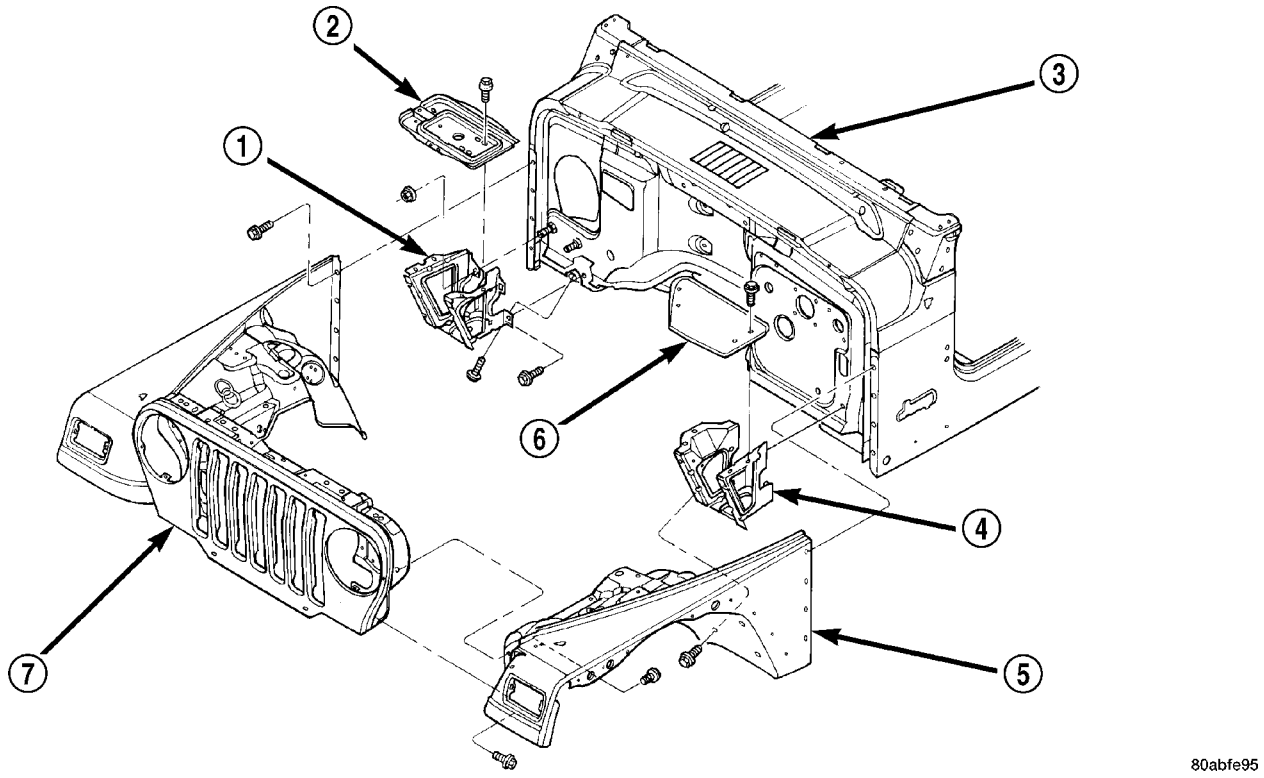

Fig. 3 FRONT FENDER

1 - REINFORCEMENT
2 - BATTERY TRAY
3 - BODY
4 - REINFORCEMENT
5 - FENDER
6 - TRAY
7 - RADIATOR GRILLE PANEL

(3) Position the front end lighting wire harness into the retainers on the fender. Engage the retainers to secure.

(4) Install the bolts attaching the fender to the HCU tray reinforcement bracket.

(5) Install the bolts attaching the fender to the cowl.

(6) If equipped, install the body side molding.

(7) Route the fog lamp (if equipped), park lamp and side marker wire harness through the access hole in the fender well. Seat the grommet.

(8) Engage the headlamp wire connector.

(9) Install the HCU tray.

(10) Position the HCU on the support tray and install the bolts.

(11) Install EVAP canister.

(12) Install horns. (Refer to 8 - ELECTRICAL/HORN/HORN - INSTALLATION)

(13) Engage horn wire connectors.

(14) Install the windshield washer reservoir.

(15) Connect the negative terminal on the battery. (Refer to 8 - ELECTRICAL/BATTERY SYSTEM/CABLES - INSTALLATION)

RADIATOR GRILLE PANEL

REMOVAL

(1) Remove the front crossmember cover.

(2) Remove the crossmember valence cover.

(3) Remove the radiator overflow bottle.

(4) Remove the bolts that attach the radiator and shroud from the grille panel.

(5) If A/C equipped:

(a) Evacuate the system.

(b) Disconnect the high and low pressure lines at the quick disconnect couplings.

(c) Cover (cap) the lines to prevent contamination.

(6) Remove the bolts attaching the radiator support rods to the grille panel.

(7) Disconnect the head lamp, turn signal, marker lamp and horn wire harness connectors.

(8) Remove the bolts attaching the fenders to the grille panel.

(9) Remove the bolt attaching the grille to the frame mount.

(10) Separate the grille from the vehicle.