WINDSHIELD FRAME

REMOVAL

(1) Unlatch top.
(2) Remove the bolts attaching the sport bar to the windshield frame.
(3) Remove the windshield wiper arms. (Refer to 8 - ELECTRICAL/WIPERS/WASHERS/WIPER ARMS - REMOVAL)
(4) Remove the torx screw closest to the hinge pivot point and tilt the windshield forward.
(5) Remove the torx screws attaching the windshield hinge to the windshield frame (Fig. 6).
(6) Separate the windshield frame from the vehicle.

INSTALLATION

NOTE: Inspect windshield to cowl seal for damage and confirm correct position.

(1) Position the windshield frame on the vehicle.
(2) Install the torx screws attaching the windshield hinge to the windshield frame.
(3) Tilt the windshield rearward.
(4) Install the torx screw closest to the hinge pivot point and lock the windshield in the upright position.

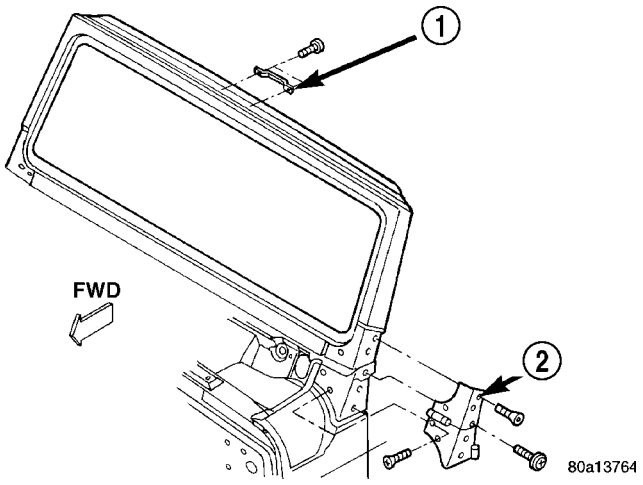

Fig. 6 WINDSHIELD FRAME

1 - WINDSHIELD HOLD DOWN LOOP
2 - WINDSHIELD HINGE

(5) Install the windshield wiper arms. (Refer to 8 - ELECTRICAL/WIPERS/WASHERS/WIPER ARMS - INSTALLATION)
(6) Install the bolts attaching the sport bar to the windshield frame.
(7) Latch top.