SEALER LOCATIONS (Continued)



HOLD GUN NOZZLE IN DIRECTION OF ARROW IN ORDER TO EFFECTIVELY SEAL METAL JOINTS.



DO NOT HOLD GUN NOZZLE IN DIRECTION OF ARROW. SEALER APPLIED AS SHOWN IS INEFFECTIVE.



3 METAL THICKNESS



2 METAL THICKNESS



3 METAL THICKNESS



2 METAL THICKNESS

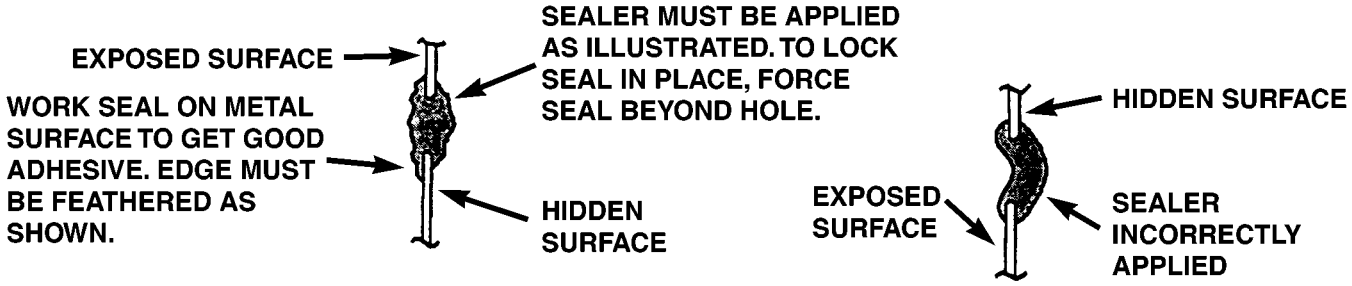

SYMBOLS

- THUMBGRADEABLE SEALER
- EXTRUDABLE THERMOPLASTIC
- EXPOSED THERMOPLASTIC SEALANT
- zzzzzzzz HIDDEN SEALANT

80866cc6

Fig. 8 APPLICATION METHODS