INPUT CLUTCH ASSEMBLY (Continued)

If not within specifications, the clutch is not assembled properly. There is no adjustment for the OD clutch clearance.

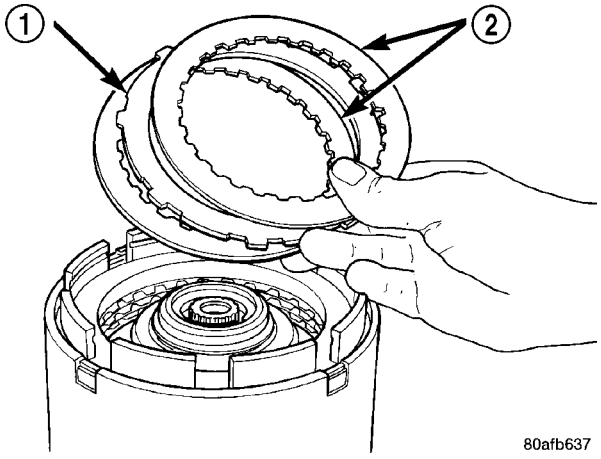

Fig. 210 Install Reverse Clutch Pack

1 - REVERSE CLUTCH PLATE
2 - REVERSE CLUTCH DISCS

(31) Install reverse clutch pack (two fibers/one steel) (1, 2) (Fig. 210).

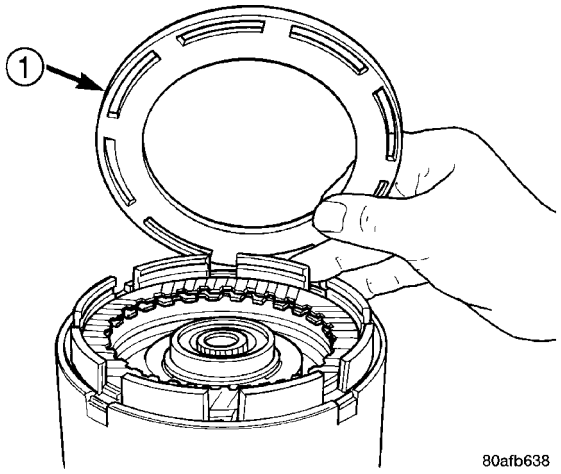

Fig. 211 Install Reaction Plate

1 - REVERSE CLUTCH REACTION PLATE (FLAT SIDE DOWN)

(32) Install reverse clutch reaction plate (1) with the flat side down towards reverse clutch (Fig. 211).

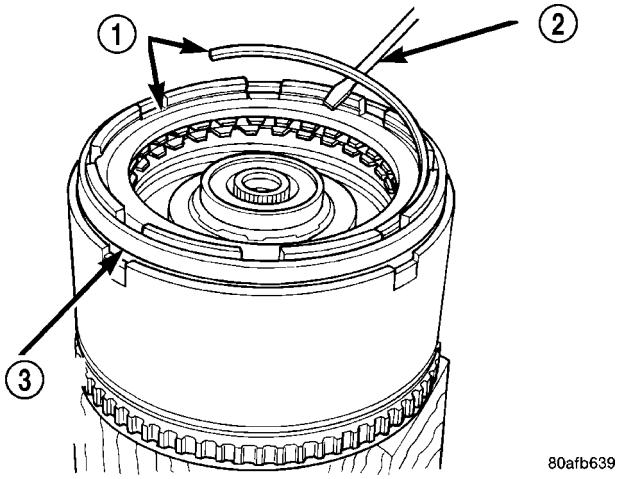

Fig. 212 Install Reverse Clutch Snap Ring

1 - REVERSE CLUTCH SNAP RING (SELECT)
2 - SCREWDRIVER
3 - REVERSE CLUTCH REACTION PLATE

(33) Tap reaction plate (3) down to allow installation of the reverse clutch snap ring (1). Install reverse clutch snap ring (1) (Fig. 212).

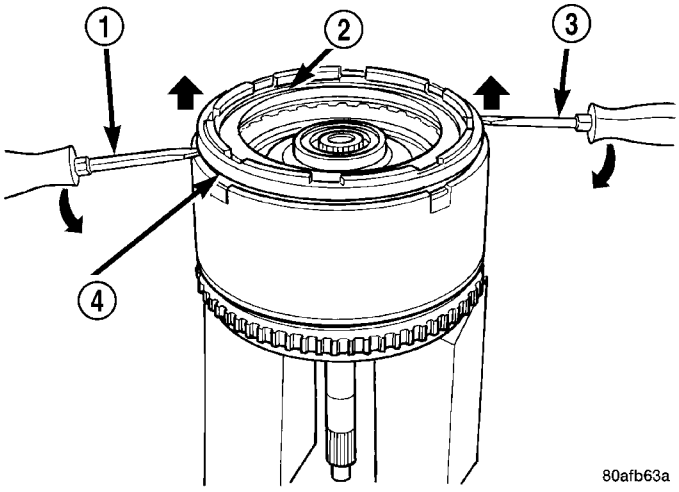

Fig. 213 Pry Up Reaction Plate

1 - SCREWDRIVER
2 - SNAP RING
3 - SCREWDRIVER
4 - MUST RAISE REVERSE REACTION PLATE TO RAISE SNAP RING

(34) Pry up reverse reaction plate (4) to seat against snap ring (2) (Fig. 213).