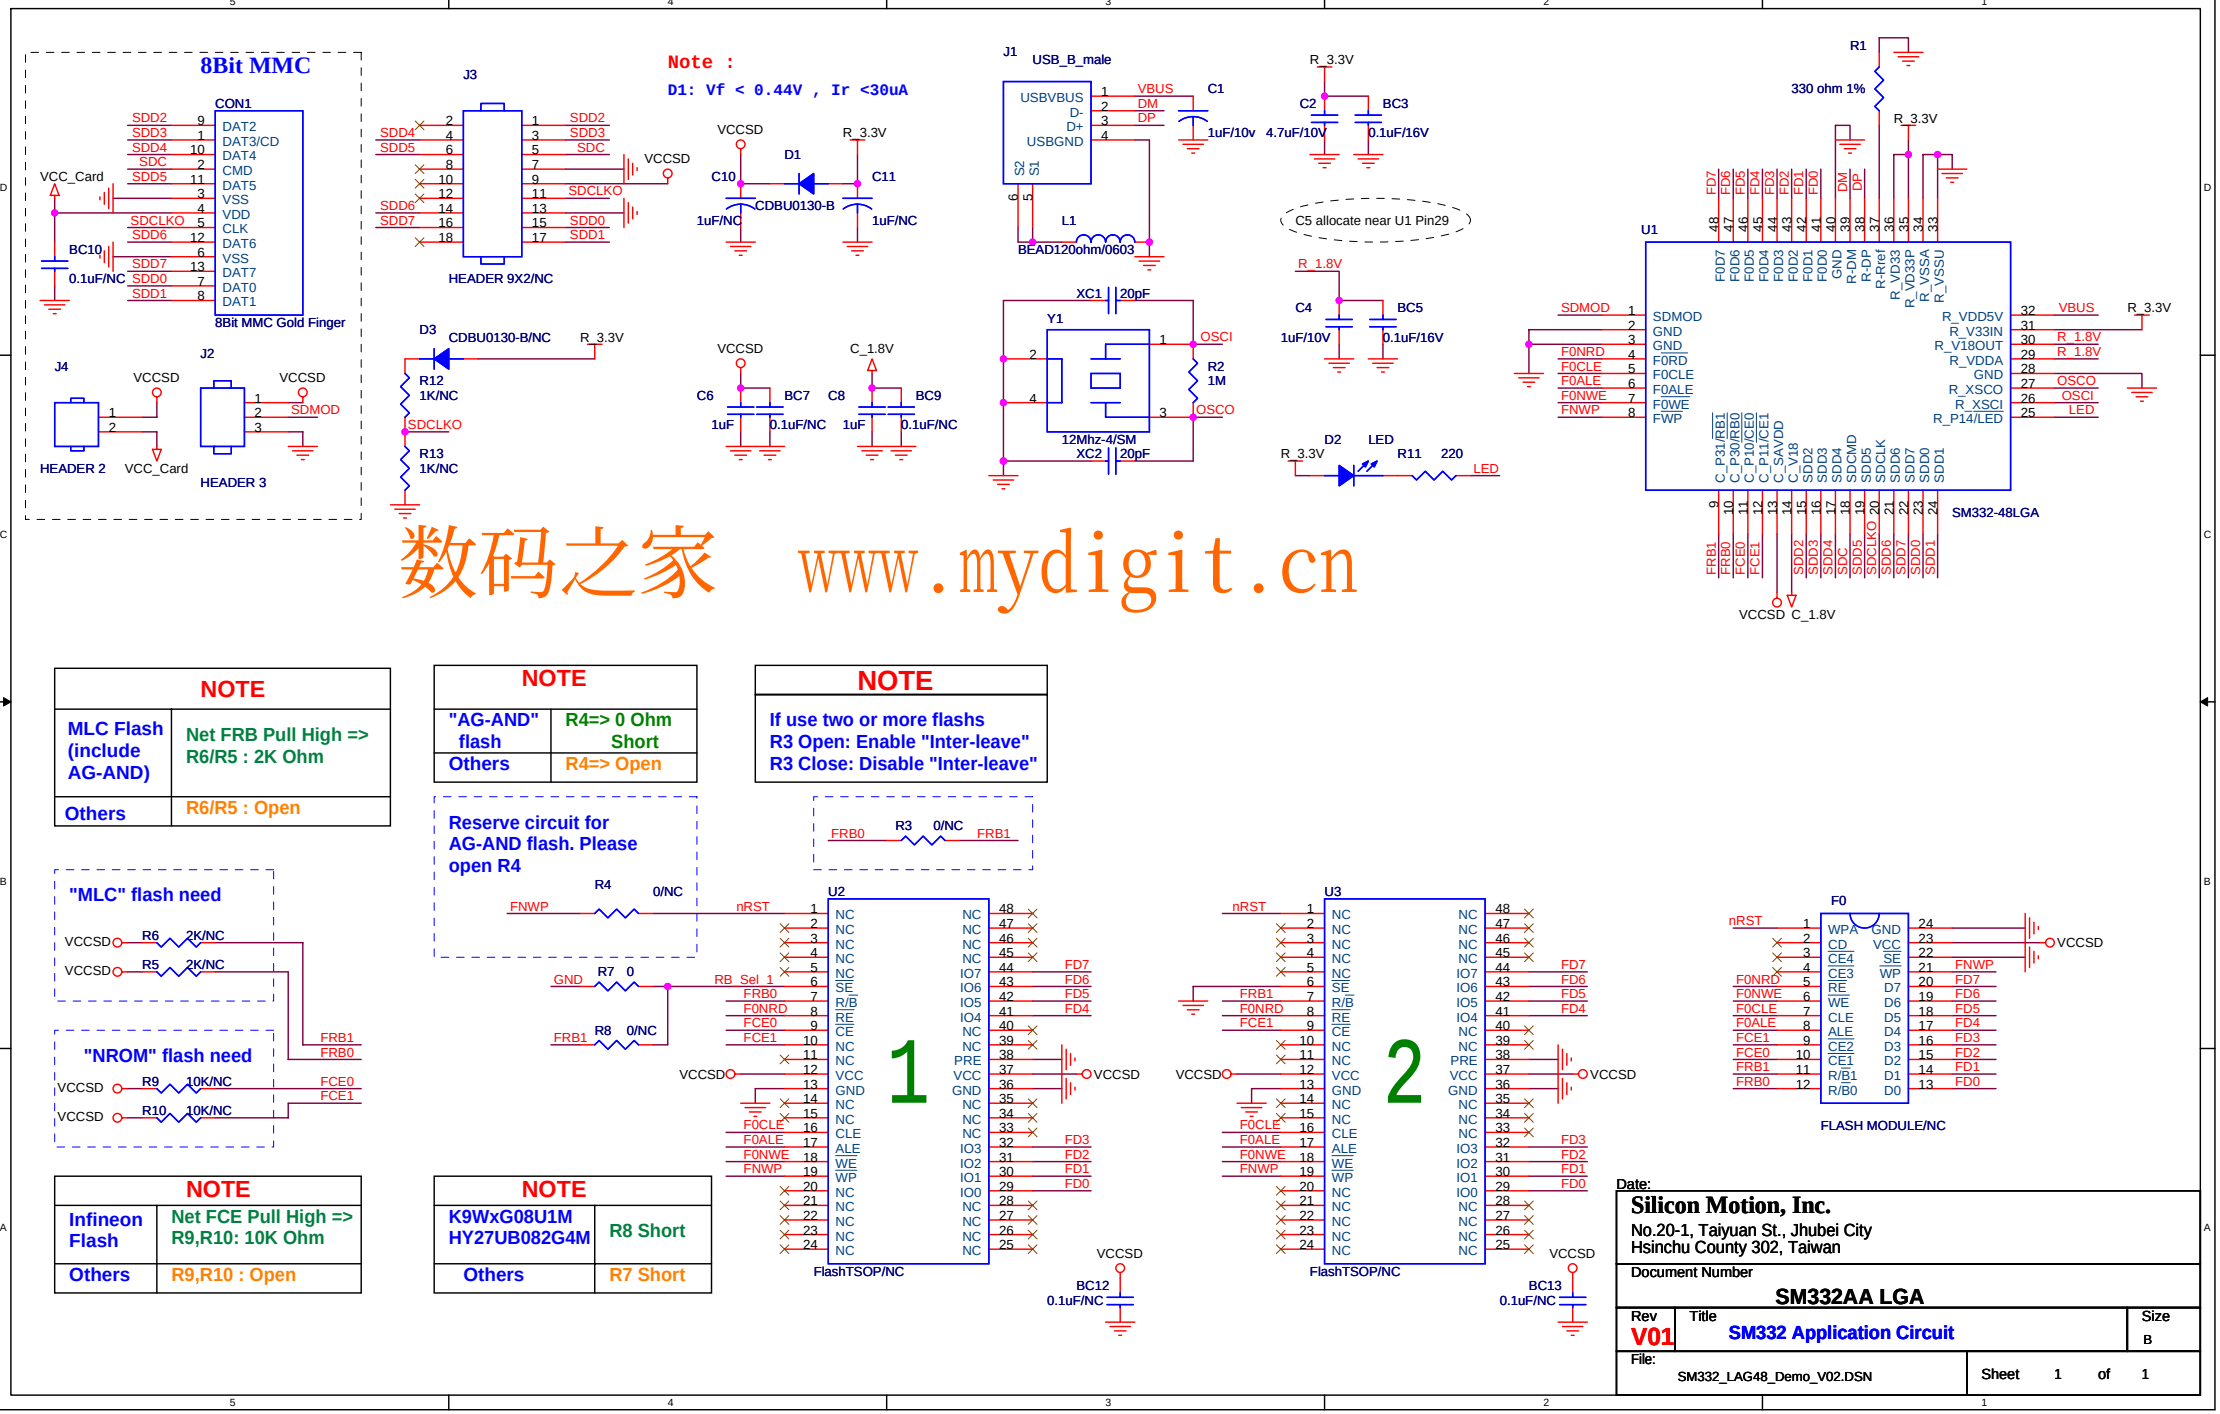
8Bit MMC
CON1
8Bit MMC Gold Finger
J3
HEADER 9X2/NC
Note :
D1: Vf < 0.44V , Ir <30uA
J1
USB_B_male
C5 allocate near U1 Pin29
R1
330 ohm 1%
U1
SM332-48LGA
J4
HEADER 2
J2
HEADER 3
D3
CDBU0130-B/NC
Y1
12Mhz-4/SM
D2
LED
数码之家 www.mydigit.cn
NOTE
MLC Flash (include AG-AND)
Net FRB Pull High => R6/R5 : 2K Ohm
Others
R6/R5 : Open
NOTE
"AG-AND" flash
R4=> 0 Ohm Short
Others
R4=> Open
NOTE
If use two or more flashs
R3 Open: Enable "Inter-leave"
R3 Close: Disable "Inter-leave"
Reserve circuit for AG-AND flash. Please open R4
"MLC" flash need
"NROM" flash need
U2
U3
FlashTSOP/NC
F0
FLASH MODULE/NC
NOTE
Infineon Flash
Net FCE Pull High => R9,R10: 10K Ohm
Others
R9,R10 : Open
NOTE
K9WxG08U1M
HY27UB082G4M
R8 Short
Others
R7 Short
Date:
Silicon Motion, Inc.
No.20-1, Taiyuan St., Jhubei City
Hsinchu County 302, Taiwan
Document Number
SM332AA LGA
Rev
V01
Title
SM332 Application Circuit
Size
B
File:
SM332_LAG48_Demo_V02.DSN
Sheet 1 of 1