

Starkey | Technical Data


ITC R

In-The-Canal Rechargeable

Omega AI+ 24 | 20 | 16

Fitting Range





Color Guide

Faceplate Colors

Dark Brown | Chestnut | Medium Brown | Light Brown | Pink | Black

Shell Colors

Clear | Light Brown | Pink | Blue/Red | Black

Patient Features


- IP Rating: 68
- Tinnitus Technology
- Wireless Connectivity
- Rechargeable Battery

Omega AI+ Technology


- Personal health monitoring technology with embedded sensors and artifical intelligence
- Compatible with StarLink 2.0 accessories and StarLink Edge accessories

	L	M	P	UP	Matrices: L, M, P, UP Battery: Lithium-ion
Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	
Peak OSPL90 (dB SPL)	110	114	117	125	
HFA OSPL90 (dB SPL)	105	109	113	122	
Peak Gain (dB)	40	50	59	68	
HFA Full-On Gain (dB)	36	46	55	63	
Frequency Range (Hz)	<100-9600	<100-8400	<100-6600	<100-5300	
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	
Reference Test Gain (dB)	28	32	36	45	
Equivalent Input Noise (dB SPL) *Expansion On (Default)*	15	15	15	15	
Equivalent Input Noise (dB SPL) *Expansion Off*	25	25	25	25	
Harmonic Distortion					
500 Hz (%)	<3	<3	<3	<3	
800 Hz (%)	<3	<3	<3	<3	
1600 Hz (%)	<3	<3	<3	<3	
Estimated Lithium-ion Battery Life*					
Without streaming (hrs)	Up to 42	Up to 42	Up to 42	Up to 42	
With streaming (hrs)	Up to 36	Up to 36	Up to 36	Up to 36	
Battery Current (mA)	0.9	0.9	0.9	0.9	


L

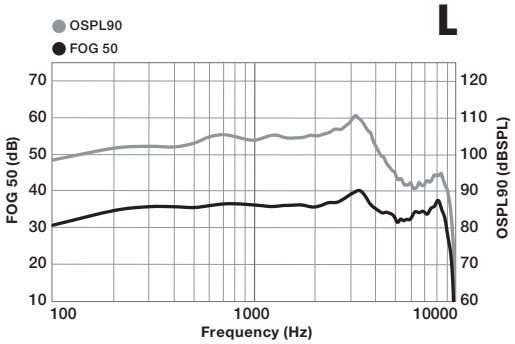


M

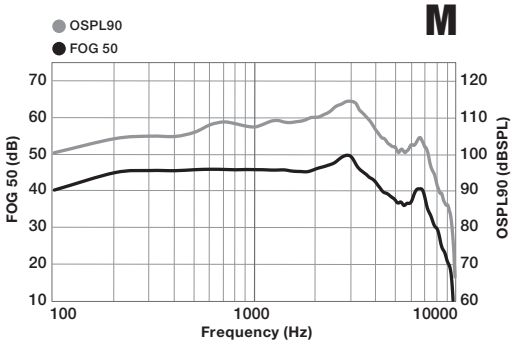

P

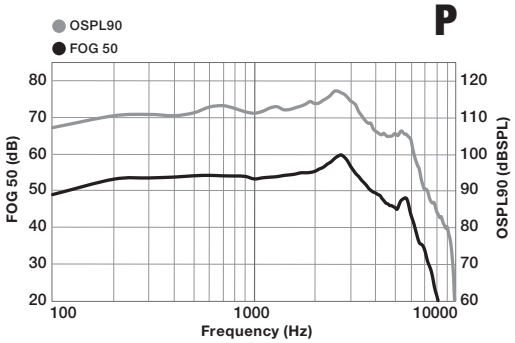

UP

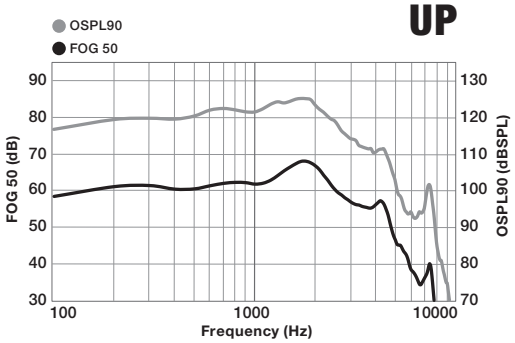

*Results will vary based on wireless usage.

Starkey, Omega, and StarLink are trademarks of Starkey Laboratories, Inc.
©2026 Starkey Laboratories, Inc. All Rights Reserved. 6/26 SPEC3141-00-EN-ST




Starkey | Technical Data

ITC R


In-The-Canal
Rechargeable

Omega AI+ 24 | 20 | 16


L




M



P



UP



Latency (ms)	4.3
Attack Time (ms)	3
Release Time (ms)	60

Starkey, Omega, and StarLink are trademarks of Starkey Laboratories, Inc.
©2026 Starkey Laboratories, Inc. All Rights Reserved. 6/26 SPEC3141-00-EN-ST