


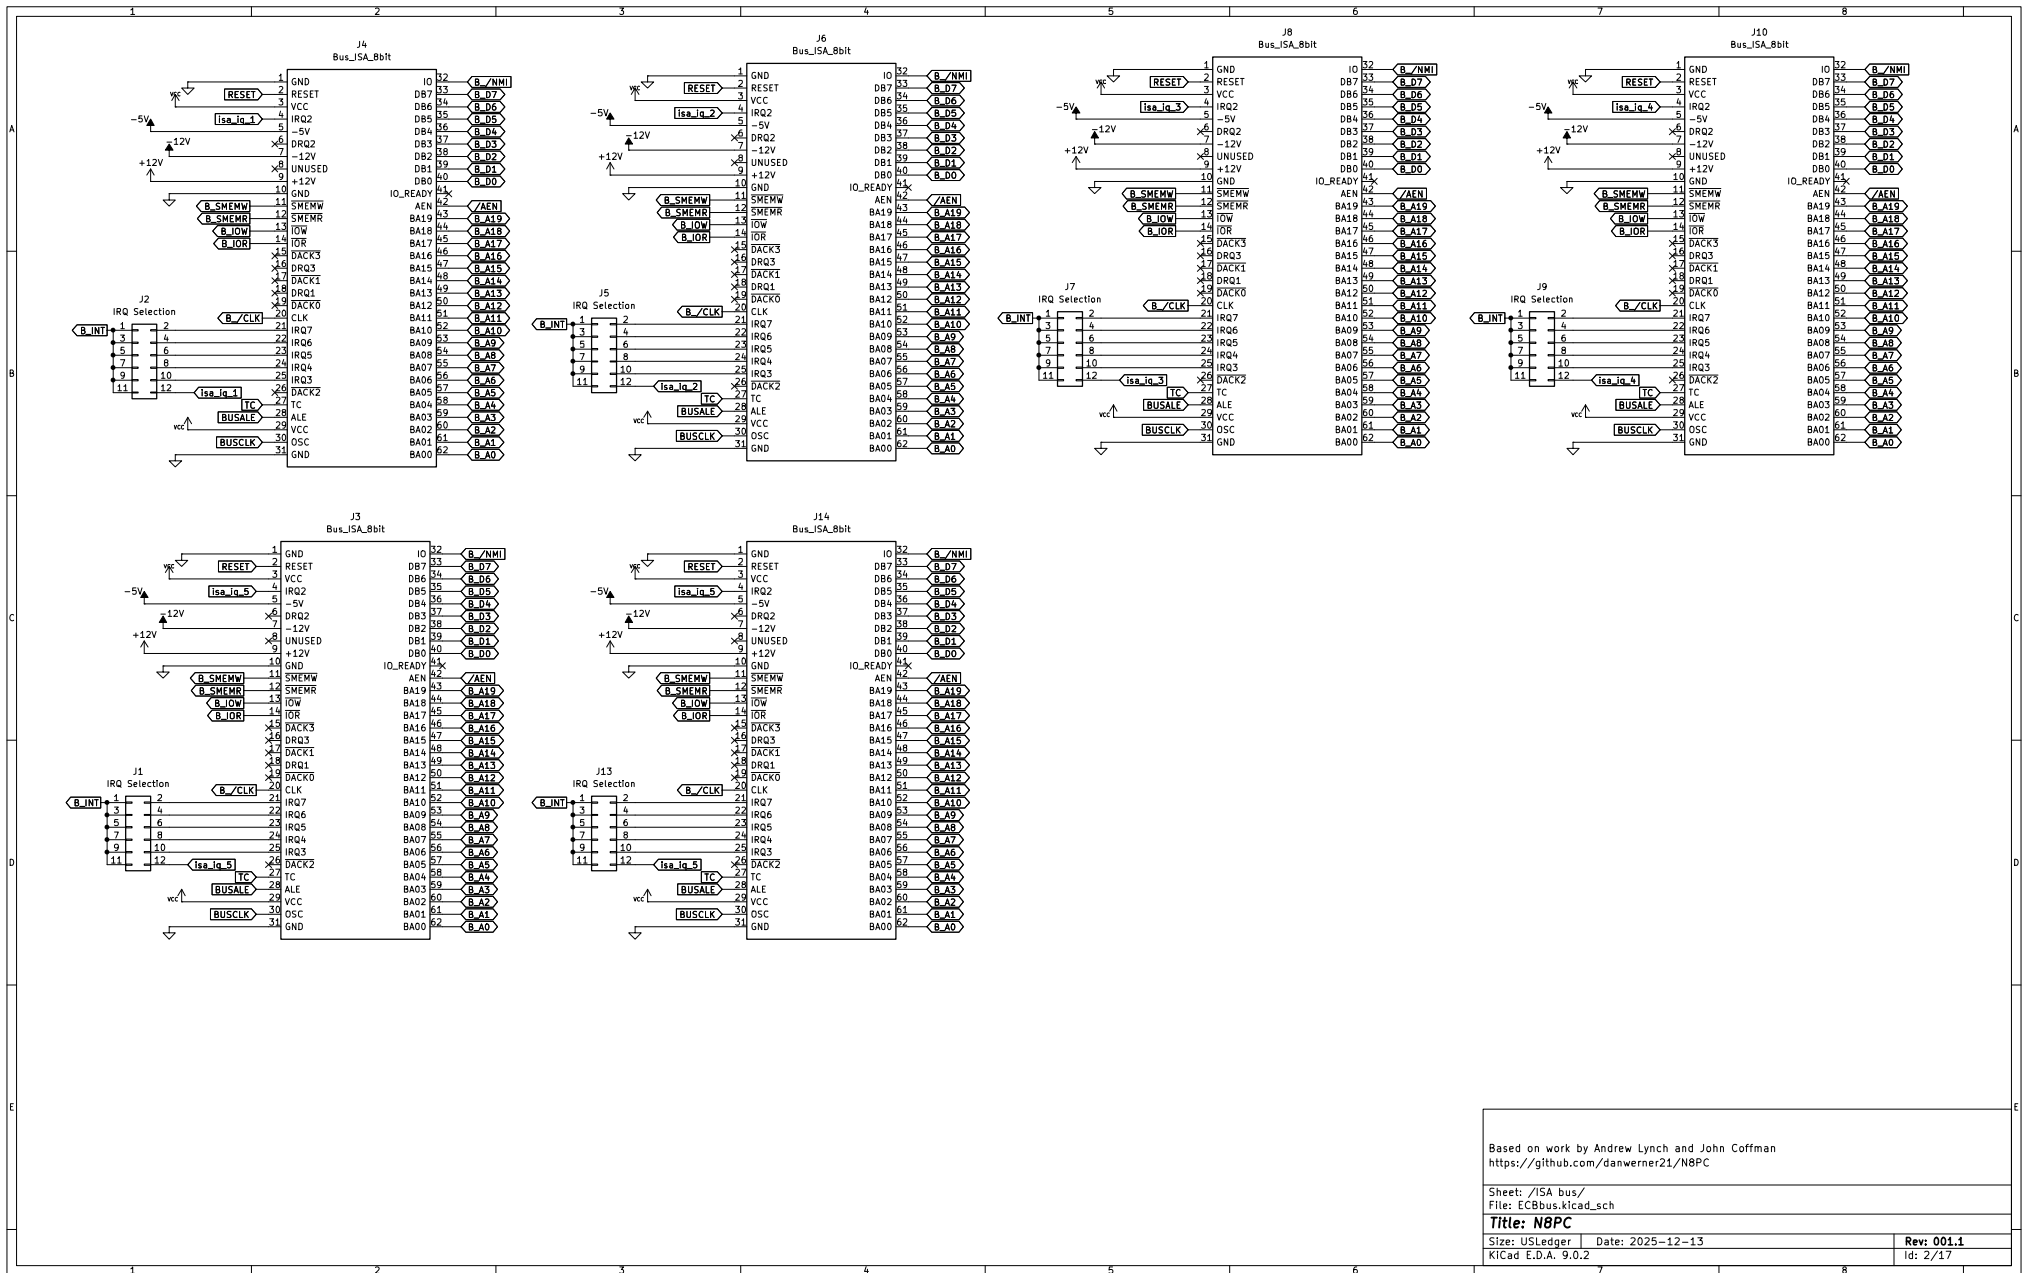


Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>




Sheet: /ISA bus/
 File: ECBus.kicad_sch

Title: N8PC

Size: USLedger Date: 2025-12-13
 KiCad E.D.A. 9.0.2

Rev: 001.1
 Id: 2/17

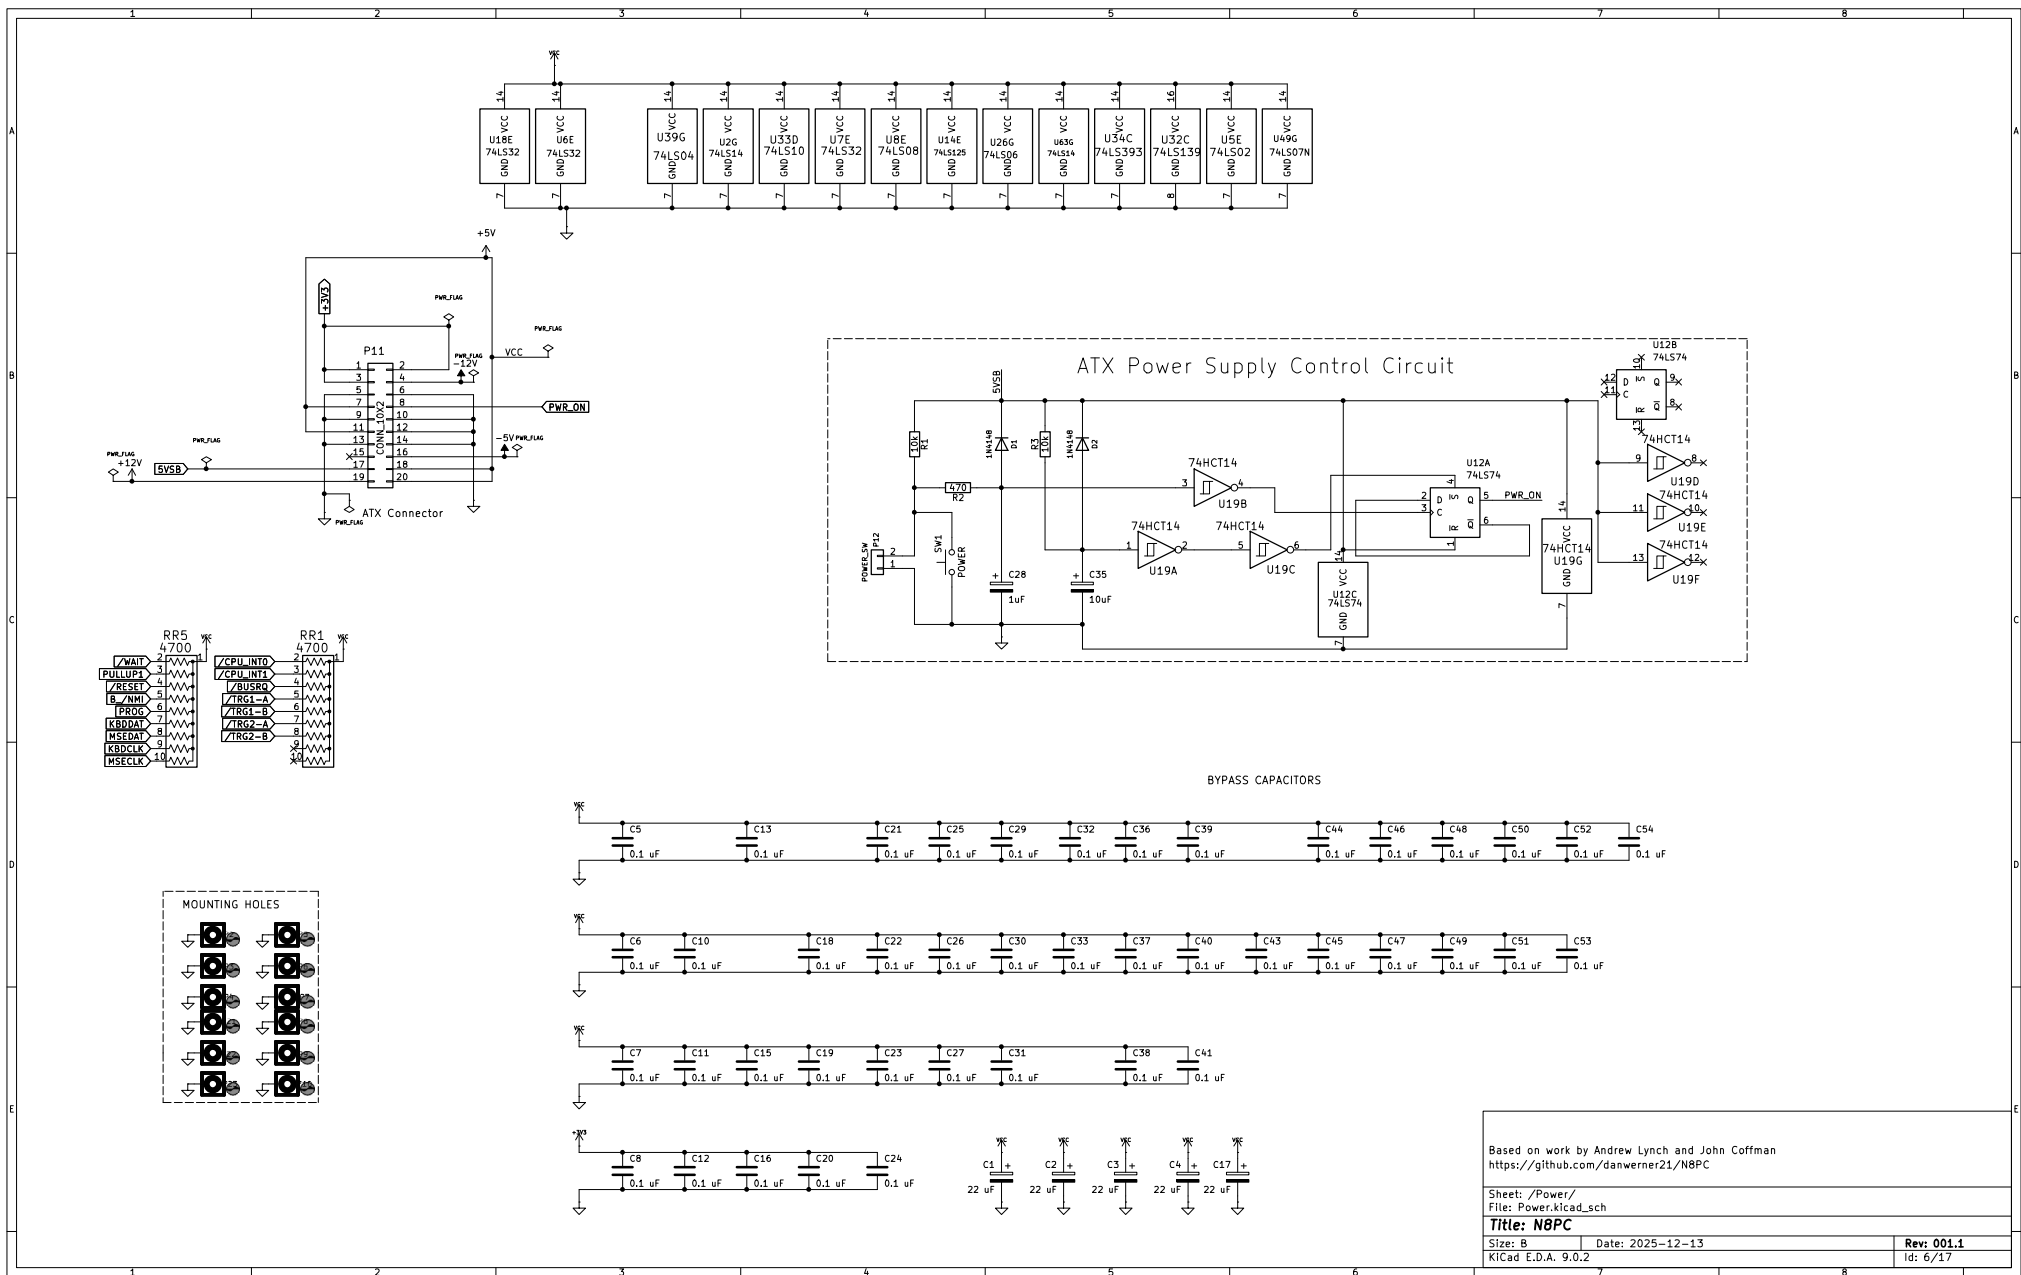

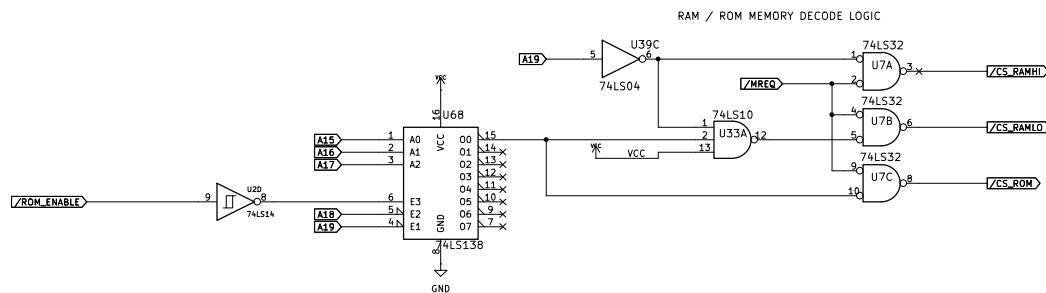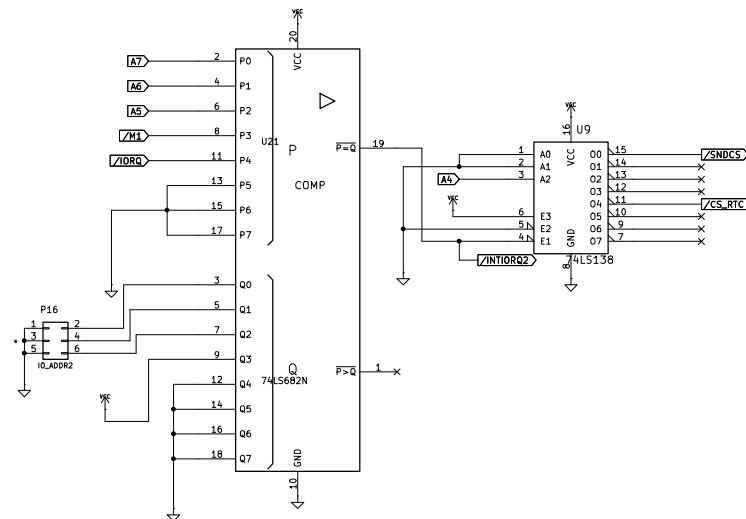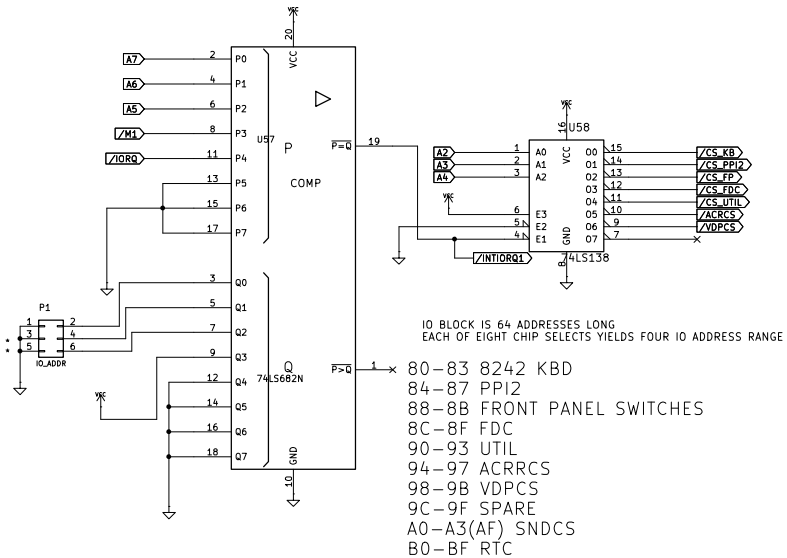

Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>

Sheet: /Decoder/
 File: Decoder.kicad_sch

Title: N8PC


Size: B Date: 2025-12-13

Rev: 001.1





KiCad E.D.A. 9.0.2

Id: 7/17





FRONT PANEL CONNECTOR

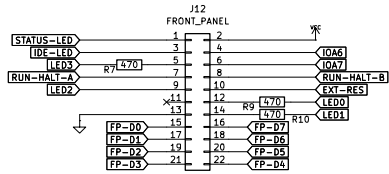

FRONT PANEL LEDs HAVE VCC CONNECTED TO LED ANODE AND LED CATHODE CONNECTED TO APPROPRIATE PIN ON CONNECTOR. RUN-HALT LED IS BI-COLOR LED ACROSS CONNECTOR PINS. IOA6 AND IOA7 ARE GPIO PINS FOR SWITCHES.

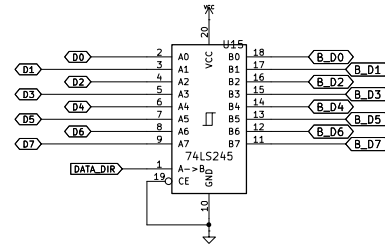

FRONT PANEL SWITCH INPUT

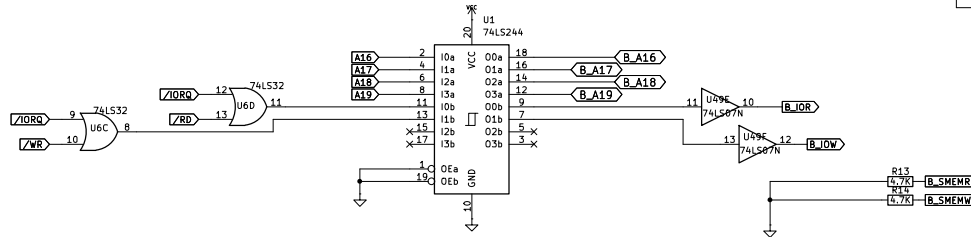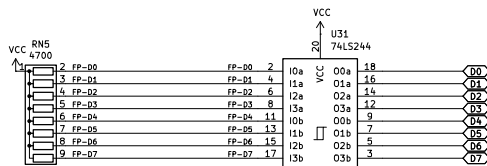

Based on work by Andrew Lynch and John Coffman
https://github.com/danwerner21/N8PC

Sheet: /IO/
File: IO.kicad_sch


Title: N8PC


Size: B Date: 2025-12-13

Rev: 001.1


KiCad E.D.A. 9.0.2

Id: 8/17

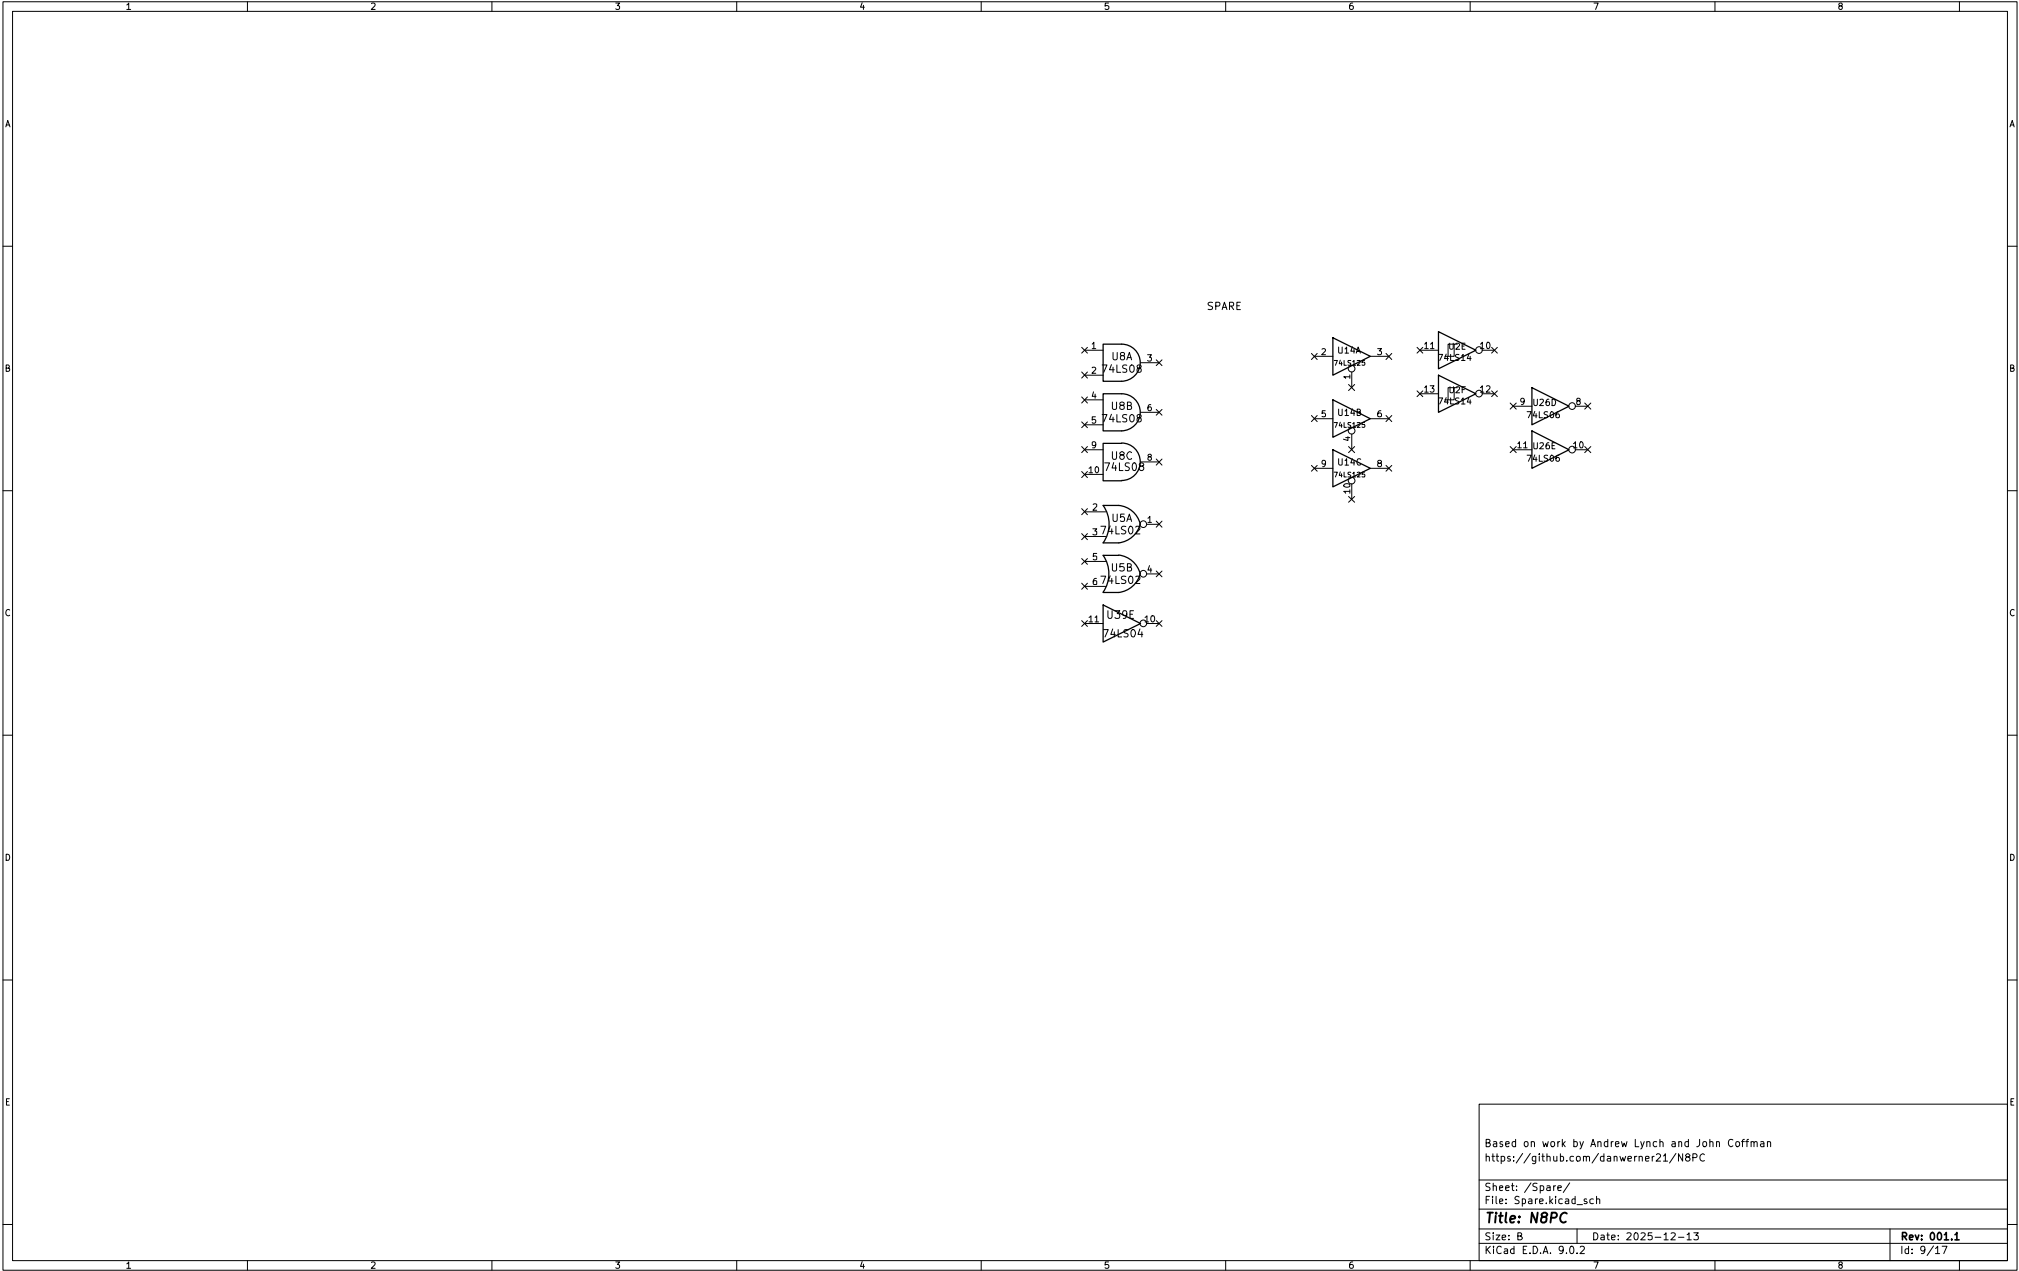

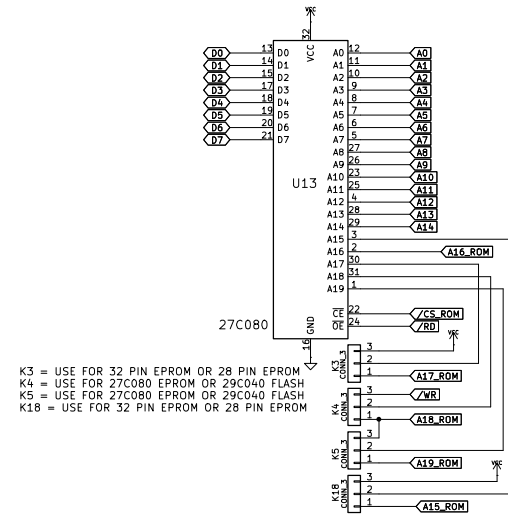

K3 = USE FOR 32 PIN EPROM OR 28 PIN EPROM
K4 = USE FOR 27C080 EPROM OR 29C040 FLASH
K5 = USE FOR 27C080 EPROM OR 29C040 FLASH
K18 = USE FOR 32 PIN EPROM OR 28 PIN EPROM

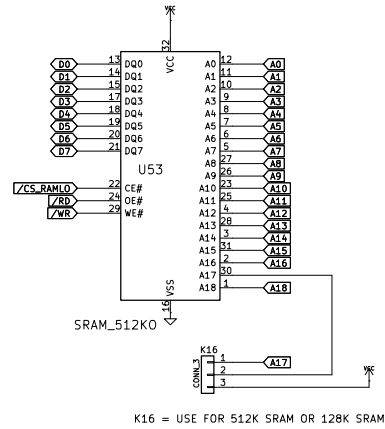

Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>


Sheet: /ramrom/
File: ramrom.kicad_sch

Title: N8PC

Size: USLedger Date: 2025-12-13

KiCad E.D.A. 9.0.2

Rev: 001.1
Id: 10/17

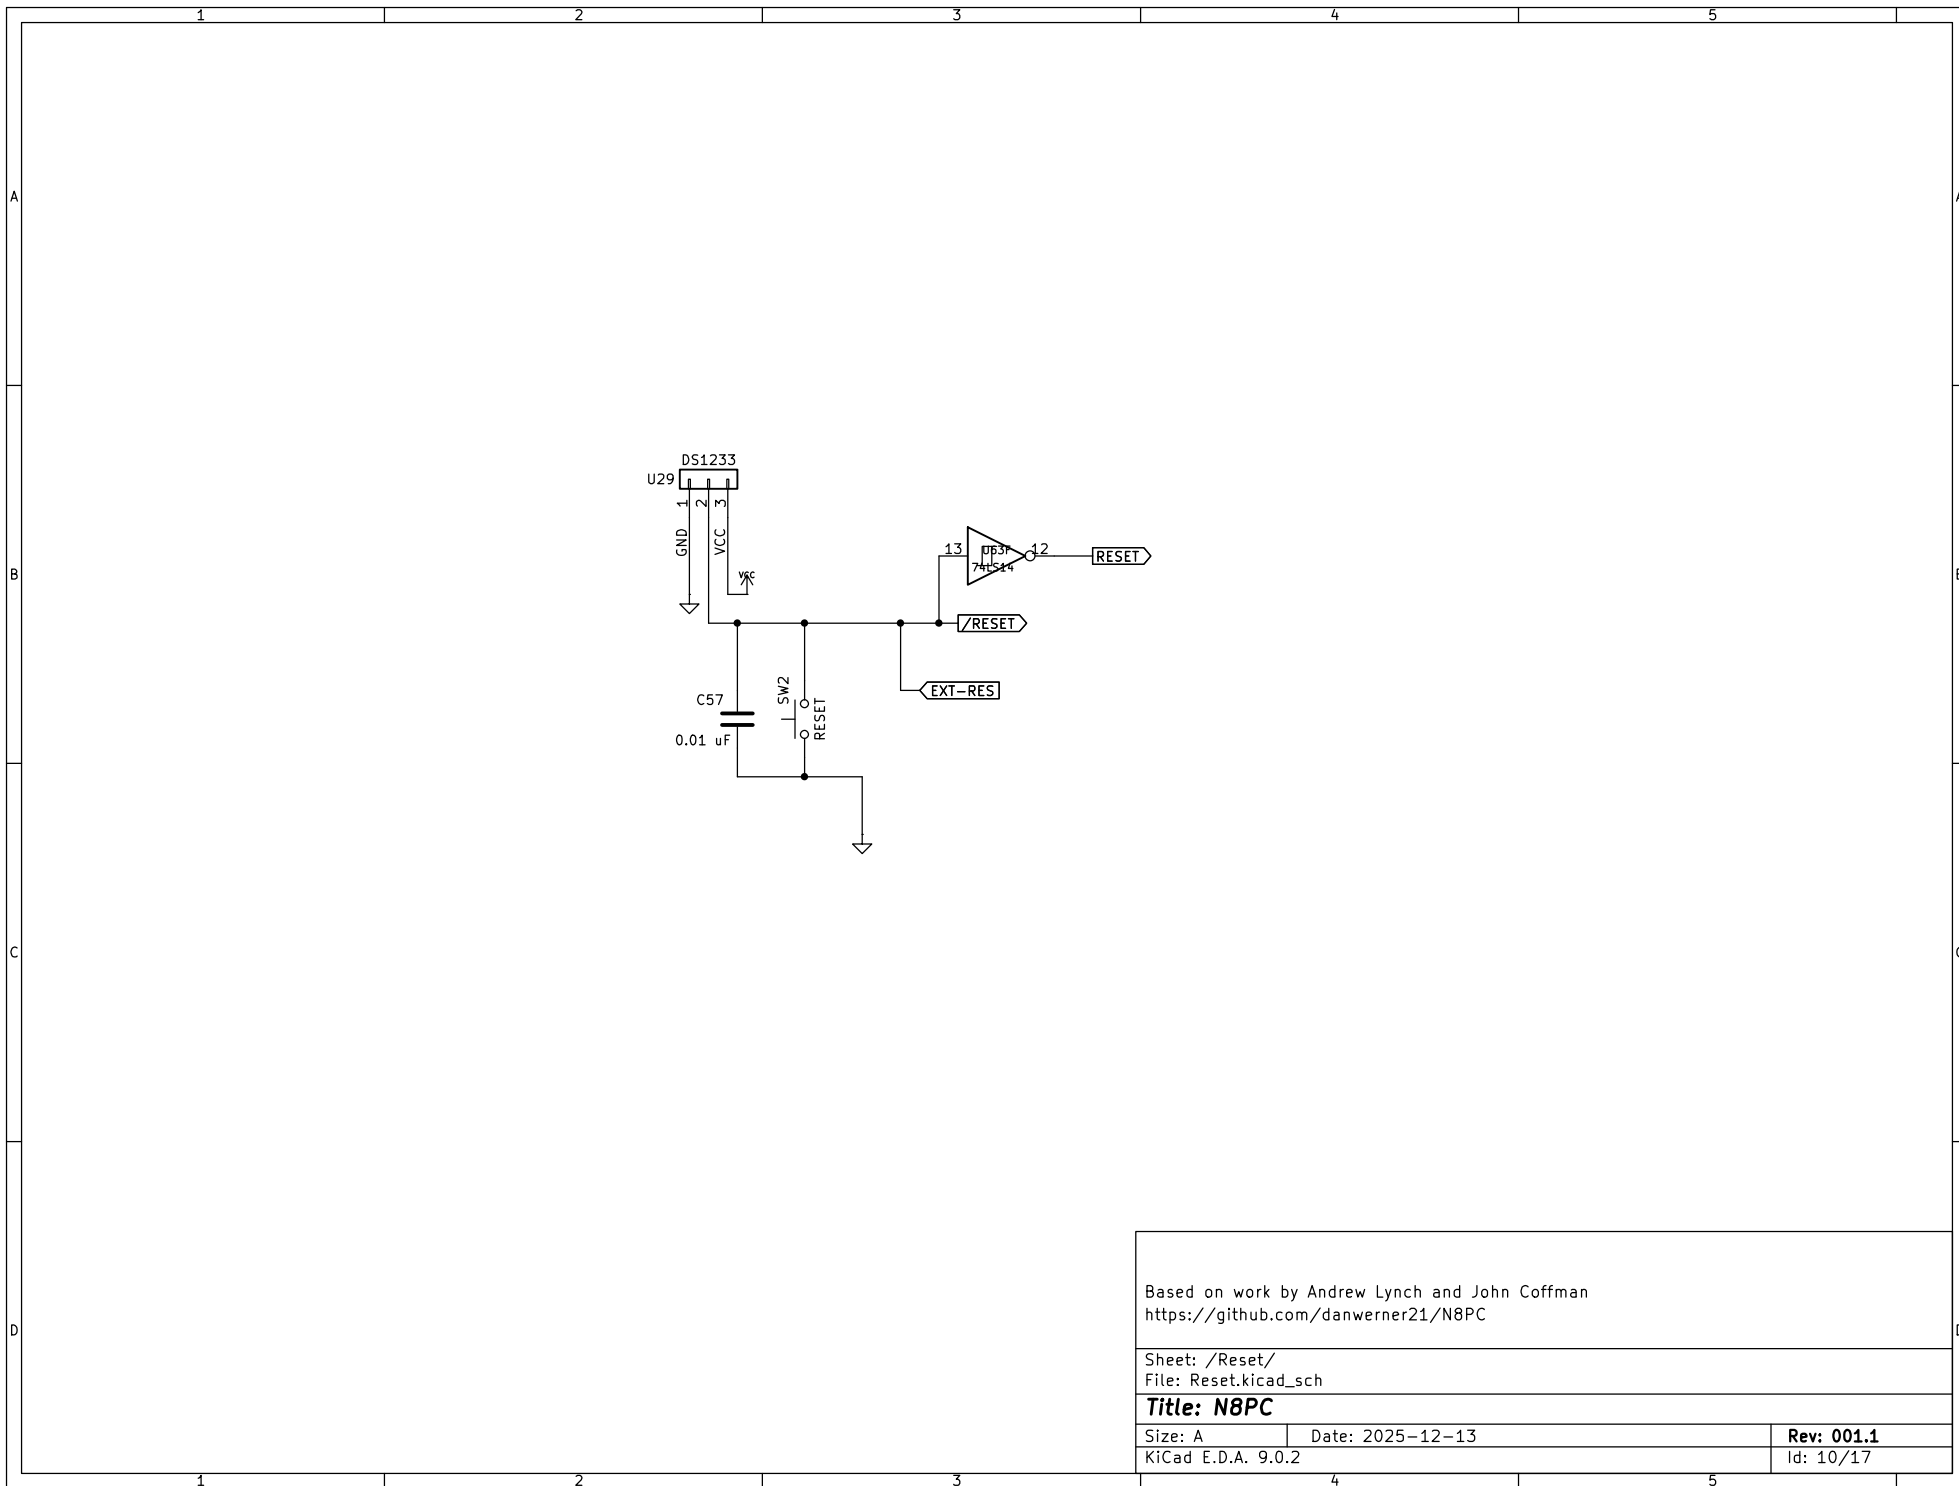

Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>


Sheet: /Reset/
File: Reset.kicad_sch

Title: N8PC


Size: A Date: 2025-12-13
KiCad E.D.A. 9.0.2

Rev: 001.1
Id: 10/17

TMS9918 Socket, suitable for a Pico99 or F18A TMS9918 emulator
Not suitable for an actual TMS9918 chip.

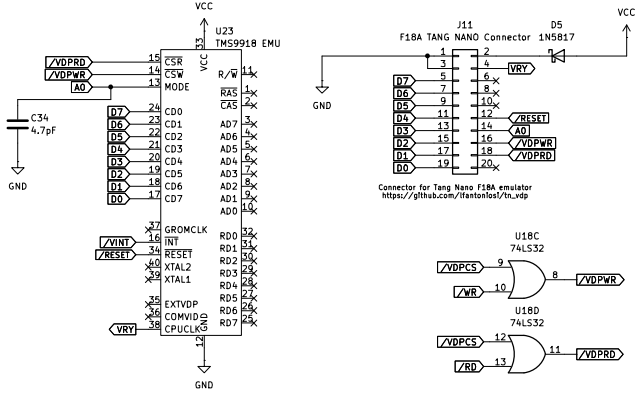

Connector for Tang Nano F18A emulator
https://github.com/Ifantonlos/tn_vdp



Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>

Sheet: /video/
File: video.kicad_sch


Title: N8PC

Size: USLedger Date: 2025-12-13


KiCad E.D.A. 9.0.2

Rev: 001.1

Id: 11/17

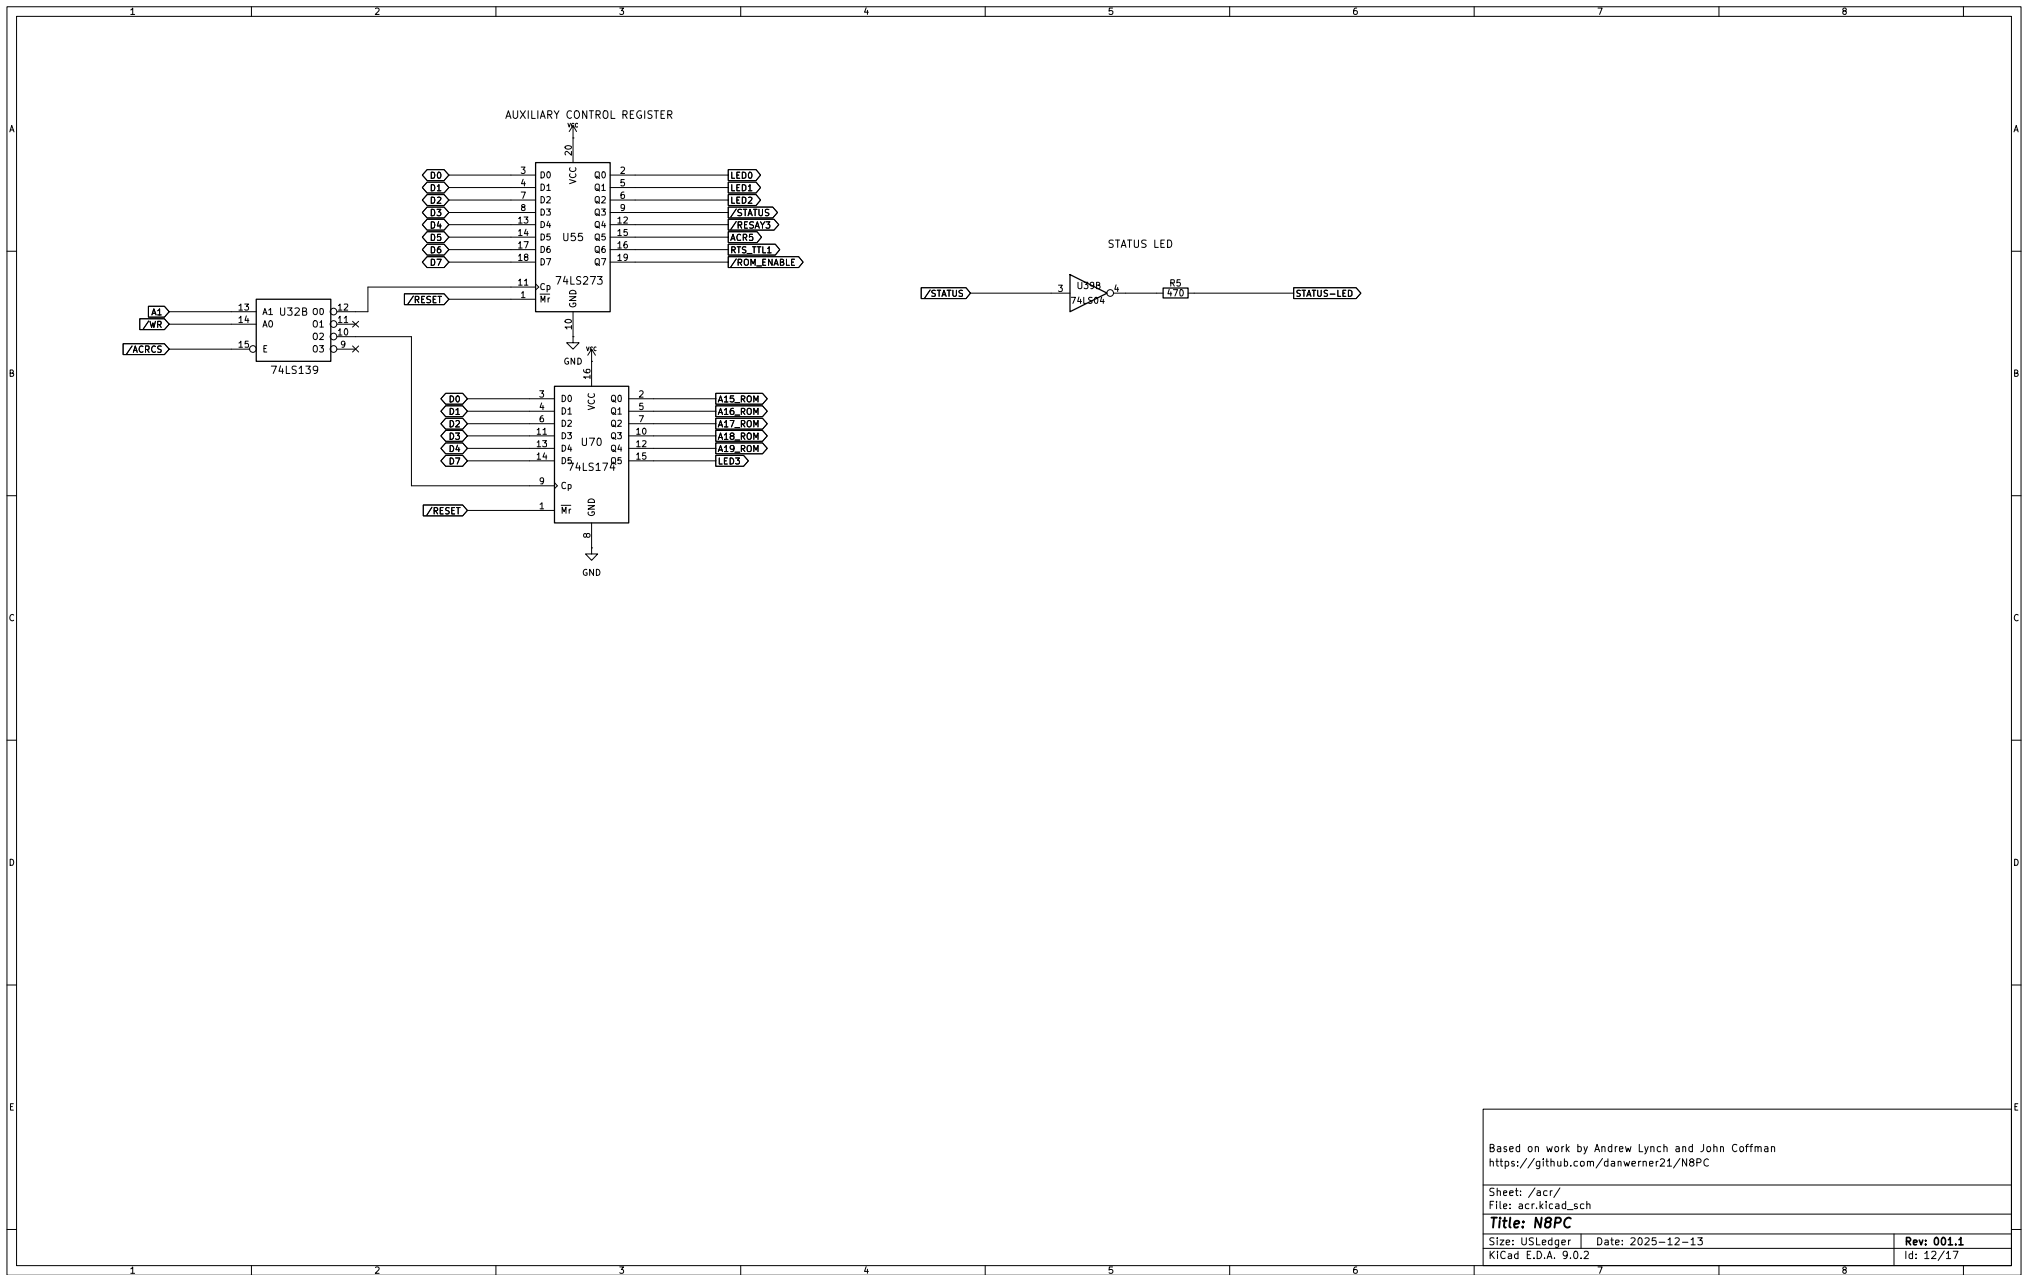

Rev: 001.1

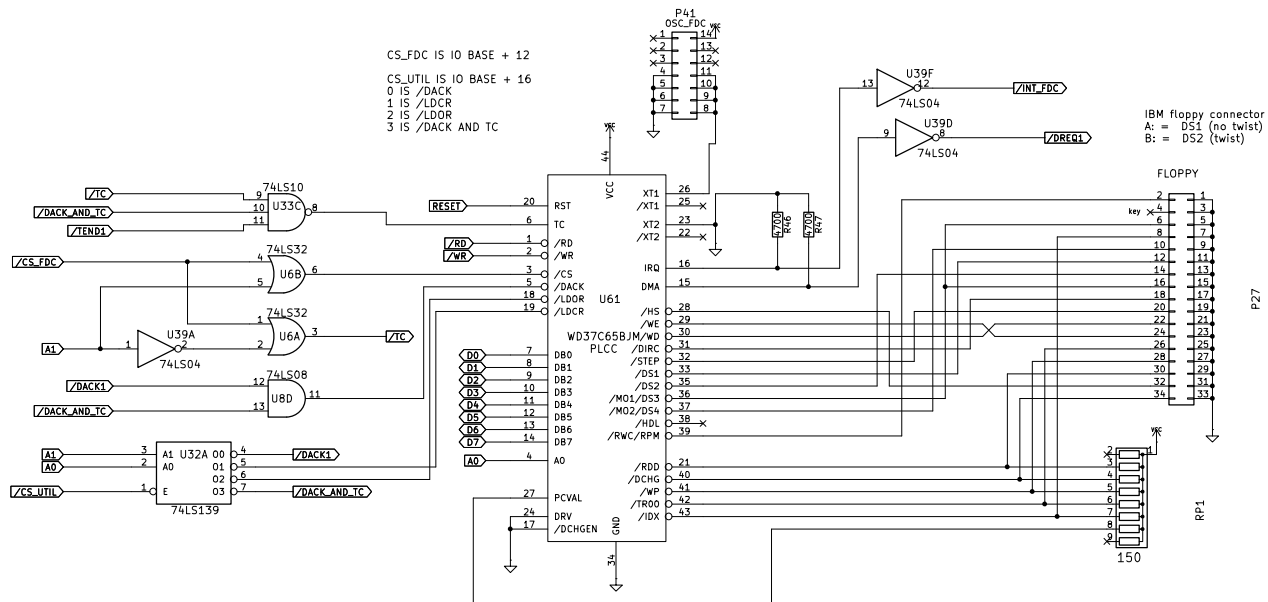

Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>

Sheet: /floppy/
 File: floppy.kicad_sch

Title: N8PC

Size: USLedger Date: 2025-12-13

Rev: 001.1

KiCad E.D.A. 9.0.2

Id: 14/17

NOTE: IMPORTANT


KNOWN TO WORK:
- VT82C42N (VIA)

LIKELY TO WORK BUT UNTESTED:



- HT6542B (Holtek)
- 83C42 (Western Digital)
- KBD42W11 (SMSC)

KNOWN DO NOT WORK:

- 8042 (Intel & clones of PC/AT era)

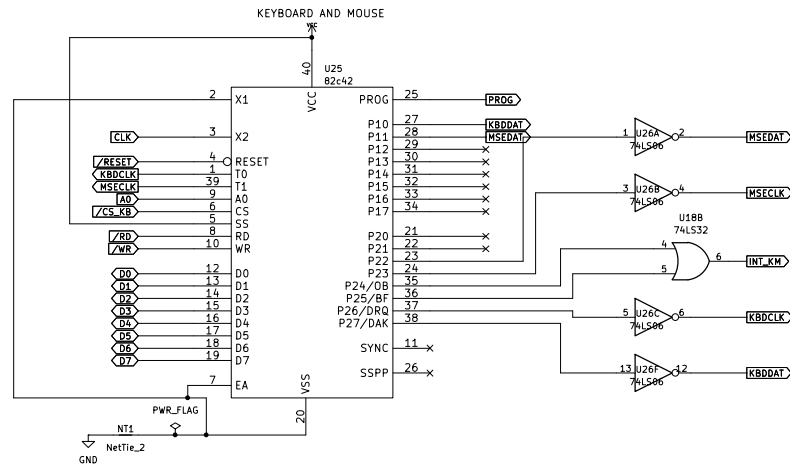

8 MHz Crystal Oscillator







Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>

Sheet: /keyboard/
File: keyboard.kicad_sch

Title: N8PC

Size: USLedger Date: 2025-12-13
KiCad E.D.A. 9.0.2

Rev: 001.1
Id: 15/17

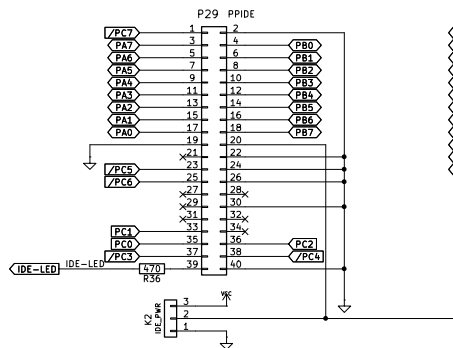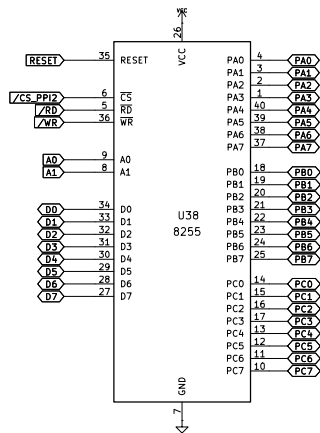

Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>

Sheet: /ide/
 File: ide.kicad_sch






Title: N8PC

Size: USLedger Date: 2025-12-13


KiCad E.O.A. 9.0.2

Rev: 001.1

Id: 16/17

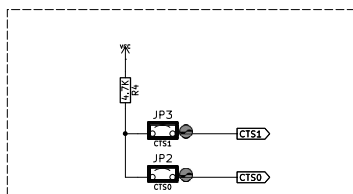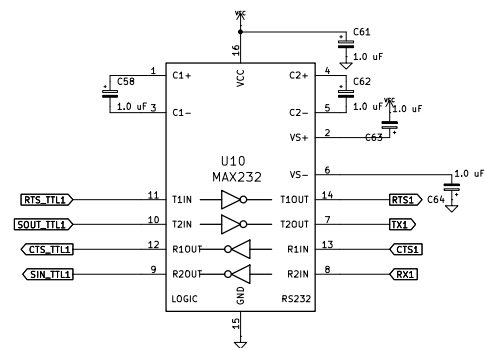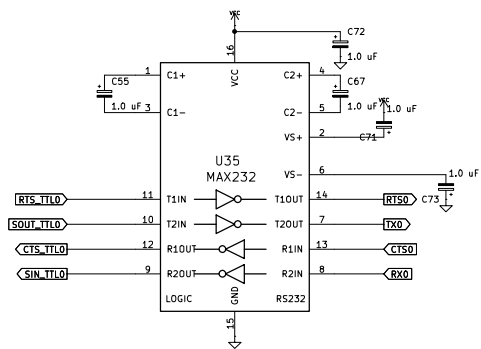

CTS is an inverted signal on the RS-232 port. So it is really /CTS. To assert the signal, it must be tied to SPACE, which is a + RS-232 voltage. (MARK, or true, is a - RS-232 voltage.)



Based on work by Andrew Lynch and John Coffman
<https://github.com/danwerner21/N8PC>

Sheet: /serial/
 File: serial.kicad_sch

Title: N8PC

Size: USLedger Date: 2025-12-13
 KiCad E.D.A. 9.0.2

Rev: 001.1
 Id: 18/17