

CIS 721

RTOS, Raspberry Pi, and Sensor Interfacing

Dan Wagner
Kansas State University
College of Engineering
Department of Computer Science

Dr. Mitchell Neilsen
Professor
Department of Computer Science

May 8 2018

1 Introduction

A Raspberry Pi is a modular, advanced computing device that can be used in many projects. It comes with 40 General Purpose Input/Output (GPIO) pins which can be attached to sensors, motors, and other similar devices Foundation, 2018. By default, the Pi ships with the Raspbian OS, which is a flavour of Debian Linux. This OS is not a Real-Time OS (RTOS) but can be loaded with one (or a microkernel) on top of the existing system. Once loaded with such software, code can be developed that allows for real-time constraints and modules. In this project, the Xenomai 3 RTOS was installed on top of Raspbian to incorporate these characteristics. Two sensors were attached to the system for real-time reporting: a DHT11 humidity/temperature sensor and a rotary encoder module. Using the Xenomai 3 API, tasks were scheduled to periodically poll the sensors within specified deadlines.

The sections to follow will outline the project details. First, the Xenomai 3 RTOS will be discussed, particularly outlining the functionality that is incorporated into the sensor software. Second, the hardware specifications will be listed and discussed for the Raspberry Pi, rotary encoder, and DHT11. Third, the software will be described in detail along with any design decisions. Then, the project's results will be discussed and analyzed. Finally, conclusions will be drawn from the previous discussions.

2 Xenomai 3

Xenomai 3 is an RTOS developed by numerous engineers as an Free Software project for Linux machines (Xenomai, 2018). It allowed for a versatile framework to be developed for real-time capabilities in Linux. The RTOS provides an in-depth, detailed API for programmers to utilize when managing tasks. In particular, several routines were used to create, initialize, schedule, and delete tasks.

3 Hardware Specifications

The Raspberry Pi 3B was used in this project; its relevant specifications are listed in the table below. Its processor and RAM were more than capable of the project's requirements, and the numerous input/output pins allowed multiple sensors to be wired up.

Table 1: Raspberry Pi Specs

Processor	Quad Core 1.2GHz Broadcom BCM2837 64bit CPU
RAM	1GB
Data Pins	40 GPIO

Both sensors were distributed in a kit by Sunfounder. The rotary encoder has a resolution 20 cycles per revolution, which means that twenty electrically high pulses will be present on the square wave per revolution (ArtOfCircuits, 2018).

The DHT11 recorded both humidity and temperature characteristics. Both readings have a 16-bit resolution. The sampling period is more than two seconds, and was the determining factor in the scheduling of tasks in Xenomai.

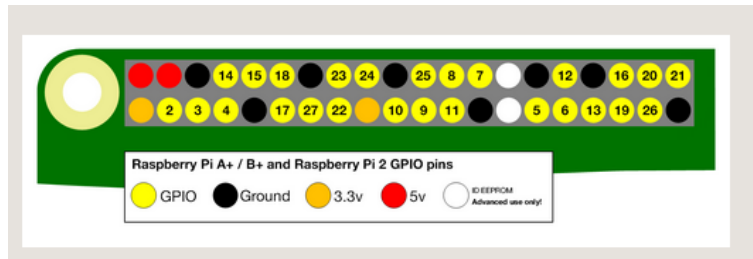


Figure 1: Pi 3 GPIO Pinouts. Courtesy of Raspberrypi.org.

Above is an image that labels each numbered pin of the Raspberry Pi 3. The rotary encoder required five pins: 5V, GND, Clock, Data, and Switch. Pins 5V and GND were attached to the top row, second and third pins (red and black). Clock was wired to GPIO 16, Data to GPIO 27, and Switch to GPIO 22. These pins were denoted by the hardware; as it will be discussed, in software, the pins were referred to by a different numbering mechanism.

The figure below shows the system’s configuration. Three pins were used for the DHT11: 5V, GND, and Data. The 5V and GND signals were wired to the same pins as the rotary encoder through the use of a breadboard. Data was wired to GPIO 23. The following image shows the final setup of the system.

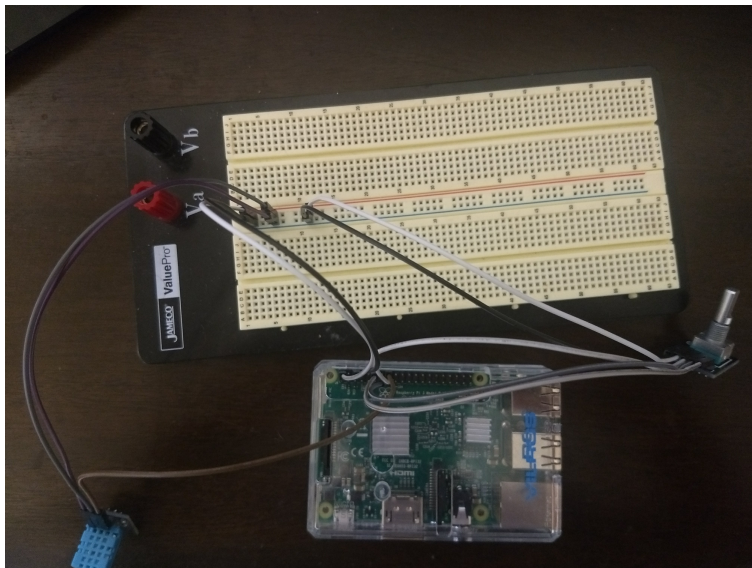


Figure 2: Sensors and Pi Wiring.

4 Software Specifications

The system’s real-time constraints were considered before any software was developed. Sunfounder, the sensors’ distributor, provided several code examples on their Github account to test each sensor (Sunfounder, 2018). These constraints were derived from examining their source code.

The DHT11 experienced high amounts of latency, as each reading required one second to be valid. First, the sensor’s pin was pulled low for 18ms. Then, it was pulled high for 40us in preparation to read the data. After a slight delay from verifying the data’s integrity via checksum, it was read, after which the next reading was not available for one second. Any reduction in this delay caused a reading to be invalid, or missed. As a result, failures of the DHT11 were defined as not receiving data from the sensor after one second.

For the rotary encoder, the latency was very short. From Sunfounder’s source code, there was no delay explicitly defined. After experimenting with the sensor, it was possible to retrieve information every 5ms without issue. Thus, any failure of the encoder was defined as not recording a reading within five milliseconds.

These real-time constraints were modeled in UPPAAL for verification. Below is a visual representation of this model.

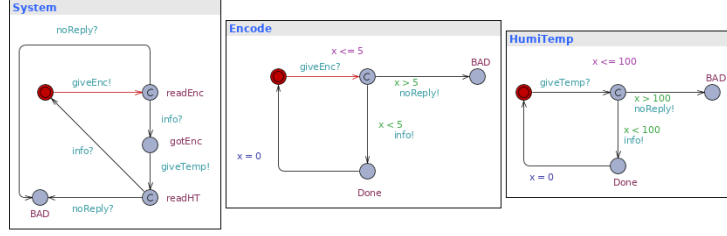


Figure 3: UPPAAL Model of the System.

One process represented the Raspberry Pi, with the encoder and DHT11 being additional processes. First, the Raspberry Pi would request the encoder's data by signaling it along the `giveEnc` channel. Upon receipt of this message, the encoder would enter an intermediate state with invariant of $x \leq 5$; this modeled the latency in its operation. If a fault occurred (i.e. $x == 5$), then a message on the `noReply` channel would be sent, the bad state would be entered and the Raspberry Pi would experience a failure. Otherwise, the encoder sent data back to the Pi (via the `info` channel) and proceeded to a done state before resetting its local clock for the next request. After receiving the encoder data, the Pi would ask the DHT11 for data by sending a message on the `giveTemp` channel. The DHT11 functioned similarly to the encoder, but with a 1 second latency (100 time units). If results were not available within one second, the sensor would report a fault on the `noReply` channel and enter a bad state. Otherwise, it would send a reply on the `info` channel, enter a done state, and reset its local clock before awaiting the next poll from the Raspberry Pi.

Three queries were used to verify these characteristics. First, $E \langle \rangle Encode.x > 5$ would test for a failure with the encoder. Next, $E \langle \rangle HumiTemp.x > 100$ would test for DHT11 failures. Finally, $A \square not System.BAD and not Encode.BAD and not HumiTemp.BAD$ tested for a system failure, with both sensors failing within the same reading cycle. UPPAAL's verifier returned that each of these queries were satisfied, so the system had no faults that could occur.

Once hardware connections were established and real-time constraints were verified, the software needed to interface with each device. This was made possible using the WiringPi library (Henderson, 2018). The GPIO designations in Figure 1 were not the same as WiringPi used. Figure 4 shows these obvious differences. The software refers to each pin by its WiringPi number. For the rotary encoder, the Clock, Data, and Switch pins were referred to as pins 1, 2, and 3 respectively. The DHT11's Data pin was denoted as pin 4. WiringPi used these numbers to interface with the Raspberry Pi through `wiringPiSetup()`. This function initialized the system to use its numbering scheme and allowed the data to be accessed on those pins.

P1: The Main GPIO connector						
WiringPi Pin	BCM GPIO	Name	Header	Name	BCM GPIO	WiringPi Pin
		3.3v	1 2	5v		
8	Rv1:0 - Rv2:2	SDA	3 4	5v		
9	Rv1:1 - Rv2:3	SCL	5 6	0v		
7	4	GPIO7	7 8	TxD	14	15
		0v	9 10	RxD	15	16
0	17	GPIO0	11 12	GPIO1	18	1
2	Rv1:21 - Rv2:27	GPIO2	13 14	0v		
3	22	GPIO3	15 16	GPIO4	23	4
		3.3v	17 18	GPIO5	24	5
12	10	MOSI	19 20	0v		
13	9	MISO	21 22	GPIO6	25	6
14	11	SCLK	23 24	CE0	8	10
		0v	25 26	CE1	7	11
WiringPi Pin	BCM GPIO	Name	Header	Name	BCM GPIO	WiringPi Pin

Figure 4: WiringPi Pinouts. Courtesy of Wiringpi.com.

5 Experimental Results

6 Conclusion

References

- ArtOfCircuits. (2018). Encoder module ky-040. Retrieved from <http://artofcircuits.com/product/encoder-module-ky-040>
- Foundation, R. P. (2018). Raspbery pi 3 specifications. Retrieved from <https://www.raspberrypi.org/products/raspberry-pi-3-model-b/>
- Henderson, G. (2018). Wiringpi. Retrieved from <http://wiringpi.com/>
- Sunfounder. (2018). Sunfounder sensor kit for rpi2. Retrieved from https://github.com/sunfounder/SunFounder_SensorKit_for_RPi2
- Xenomai. (2018). Xenomai task management services. Retrieved from https://xenomai.org/documentation/xenomai-3/html/xeno3prm/group__alchemy__task.html

7 Source Code

```
#include <wiringPi.h>
#include <stdio.h>
#include <stdlib.h>
#include <stdint.h>
#include <signal.h>
#include <unistd.h>
#include <math.h>

#include <alchemy/task.h>
#include <alchemy/timer.h>

#define MAXTIMINGS 85

#define ENC_CLK_PIN 1
#define ENC_DT_PIN 2
#define ENC_SW_PIN 3
#define DHTPIN 4

// Tasks
RT_TASK humitemp;
RT_TASK encoder;

RTIME humitemp_period = 1e8;
RTIME encoder_period = 5e6;

// Encoder variables
unsigned char last_enc_status;
unsigned char flag;
unsigned char current_enc_status;

// Humitemp sensor data
int dht11[5] = {0, 0, 0, 0, 0};
int old[5] = {0, 0, 0, 0, 0};

float timer = 0;
float last_timer = 0;
int count, prev;

void quit(int signal) {
    // Suspend tasks, then delete them.
    rt_task_suspend(&humitemp);
    rt_task_suspend(&encoder);
```

```

    printf("Tasks suspended. Deleting...\n");
    rt_task_delete(&humitemp);
    rt_task_delete(&encoder);

    printf("Tasks deleted. Exiting...\n");
    exit(0);
}

/* Attempts to read the encoder data every 50 ms. */
static void read_encoder() {
    rt_task_set_periodic(NULL, TM_NOW, rt_timer_ns2ticks(encoder_period)); //50ms period
    while (1) {
        last_enc_status = digitalRead(ENC_DT_PIN);
        while(!digitalRead(ENC_CLK_PIN)) { // timing constraint here?
            current_enc_status = digitalRead(ENC_DT_PIN);
            flag = 1;
        }

        if (flag == 1) {
            flag = 0;
            if (last_enc_status == 0 && current_enc_status == 1) count++;
            if (last_enc_status == 1 && current_enc_status == 0) count--;
        }
        if (count != prev) printf("Encoder count: %d\n", count);
        prev = count;
        rt_task_wait_period(NULL); // wait for the next period to run the following
    }
}

/* Attempt to retrieve the data from the humidity/temperature sensor. */
static void read_temp() {
    rt_task_set_periodic(NULL, TM_NOW, rt_timer_ns2ticks(humitemp_period)); // 1s period
    while (1) {
        uint8_t laststate = HIGH;
        uint8_t counter = 0;
        uint8_t j = 0, i;
        float f; // fahrenheit

        dht11[0] = dht11[1] = dht11[2] = dht11[3] = dht11[4] = 0;

        // pull pin down for 18 milliseconds
        pinMode(DHTPIN, OUTPUT);
        digitalWrite(DHTPIN, LOW);
        delay(18);
        // then pull it up for 40 microseconds
        digitalWrite(DHTPIN, HIGH);
    }
}

```

```

delayMicroseconds(40);
// prepare to read the pin
pinMode(DHTPIN, INPUT);

// detect change and read data
for ( i=0; i< MAXTIMINGS; i++) {
    counter = 0;
    while (digitalRead(DHTPIN) == laststate) {
        counter++;
        rt_task_sleep(1);
        if (counter == 255) {
            break;
        }
    }
    laststate = digitalRead(DHTPIN);

    if (counter == 255) break;

    // ignore first 3 transitions
    if ((i >= 4) && (i%2 == 0)) {
        // shove each bit into the storage bytes
        dht11[j/8] <<= 1;
        if (counter > 16)
            dht11[j/8] |= 1;
        j++;
    }
}

// check we read 40 bits (8bit x 5 ) + verify checksum in the last byte
// print it out if data is good
if ((j >= 40) &&
    (dht11[4] == ((dht11[0] + dht11[1] + dht11[2] + dht11[3]) & 0xFF)) ) {
    f = dht11[2] * 9. / 5. + 32;
    printf("Humidity = %d.%d %% Temperature = %d.%d *C (%.1f *F)\n",
        dht11[0], dht11[1], dht11[2], dht11[3], f);
        old[0] = dht11[0];
        old[1] = dht11[1];
        old[2] = dht11[2];
        old[3] = dht11[3];
}

    // Data bad -- print last good reading
else
{
    printf("Humidity = %d.%d %% Temperature = %d.%d *C (%.1f *F)\n",

```

```

        old[0], old[1], old[2], old[3], f);
    }
    int error_code = rt_task_wait_period(NULL); // wait for the next period to run t
    if (error_code) { printf("Error from rt_task_wait_period for read_encoder %s\n",
    }
}

/* Initializes the ISR for the Encoder. */
void init_encoder() {
pinMode(ENC_SW_PIN, INPUT);
pinMode(ENC_DT_PIN, INPUT);
pinMode(ENC_CLK_PIN, INPUT);

pullUpDnControl(ENC_SW_PIN, PUD_UP);
    if (wiringPiISR(ENC_SW_PIN, INT_EDGE_FALLING, &read_encoder), 0) {
        printf("Unable to initialize ISR\n");
    }
}

int main(int argc, char* argv[]) {
    signal(SIGINT, quit);
    printf("Initializing tasks.\n");
    if (wiringPiSetup() < 0) printf("WiringPi setup error\n");
    init_encoder();
    printf("Initialization complete.\n");

    // &task, name, stack size, priority, mode);

    rt_task_create(&encoder, "Encoder", 10, 50, 0);
    rt_task_start(&encoder, &read_encoder, 0);

    rt_task_create(&humitemp, "Humitemp", 0, 49, 0);
    rt_task_start(&humitemp, &read_temp, 0);
    while(1);
    return 0;
}

```