


ROCKER PANEL MOULDING

REMOVAL


1. REMOVE ROCKER PANEL MOULDING

(a) Remove the 4 screws.

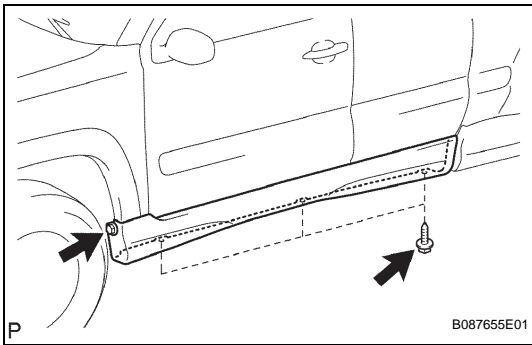


(b) Apply protective tape to the outer circumference of the rocker panel moulding, as shown in the illustration.

(c) Using a moulding remover, disengage the 9 clips and remove the rocker panel moulding.

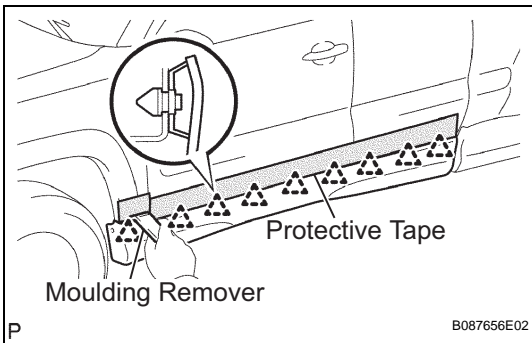


(d) Turn the clips 90° clockwise and remove them.

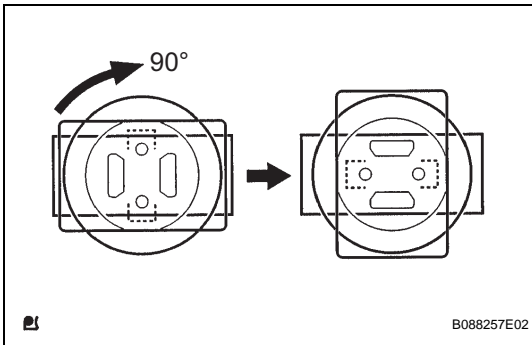


2. REMOVE BODY ROCKER PANEL MOULDING ASSEMBLY


(a) Remove the 3 screws.

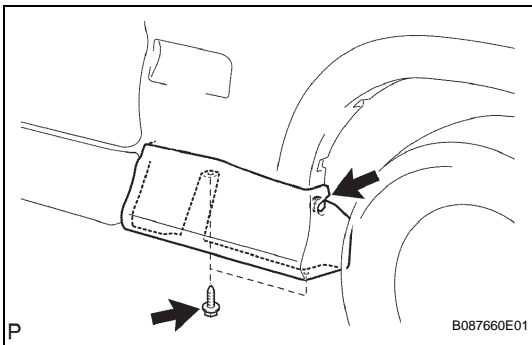


(b) Apply protective tape to the outer circumference of the body rocker panel moulding, as shown in the illustration.

(c) Using a moulding remover, disengage the 3 clips and remove the body rocker panel moulding.

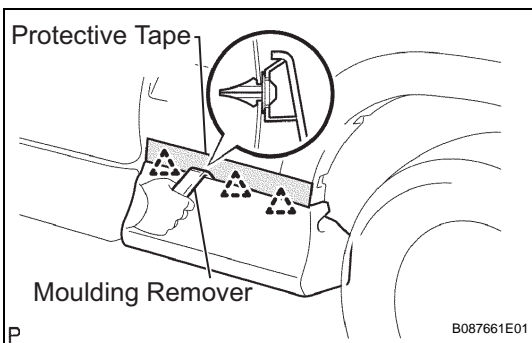

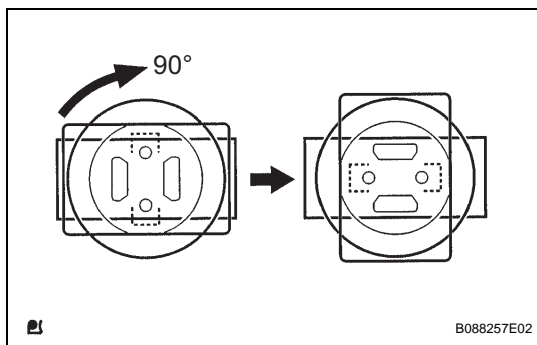


(d) Turn the 90° clockwise and remove them.

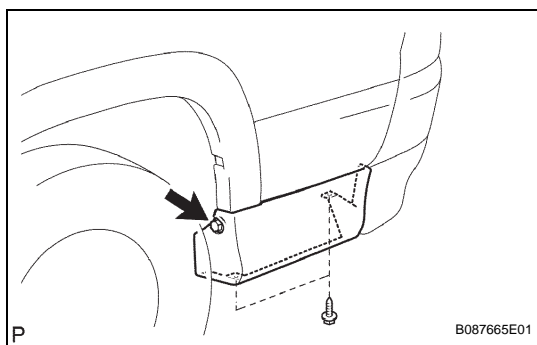


3. REMOVE BACK DOOR OUTSIDE MOULDING SUB-ASSEMBLY

(a) Remove the 3 screws.

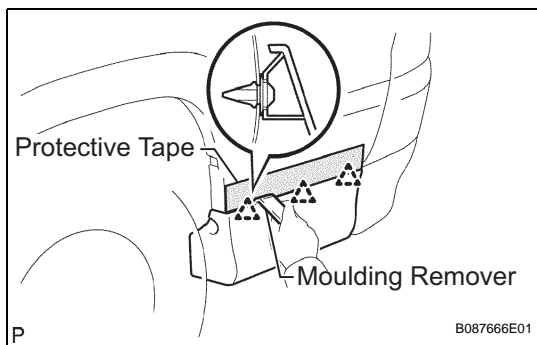


(b) Apply protective tape to the outer circumference of the back door outside moulding, as shown in the illustration.

(c) Using a moulding remover, disengage the 3 clips and remove the back door outside moulding.

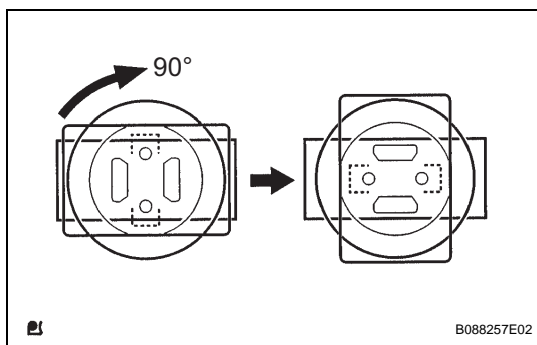


(d) Turn the clips 90° clockwise and remove them.

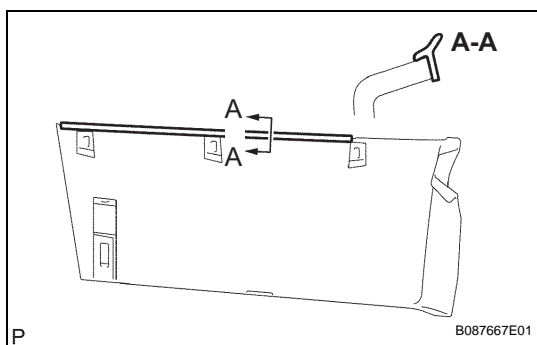

INSTALLATION

1. INSTALL BACK DOOR OUTSIDE MOULDING SUB-ASSEMBLY


(a) Install new No. 3 body outside moulding pad in the position shown in the illustration.

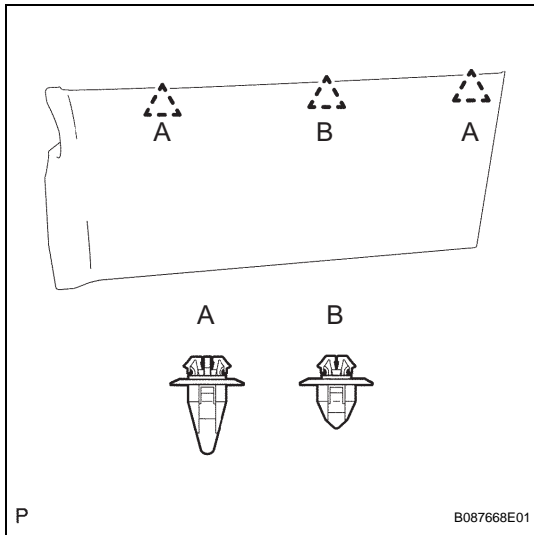


- (b) Install each clip in the position shown in the illustration.

NOTICE:


If you install the clips wrongly, the installation of the back door outside moulding would be improper.

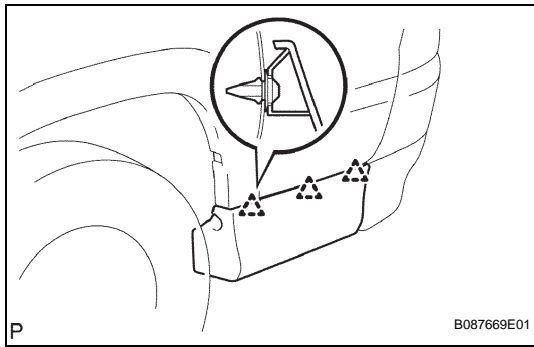

- (c) Engage the 3 clips and install the back door outside moulding.

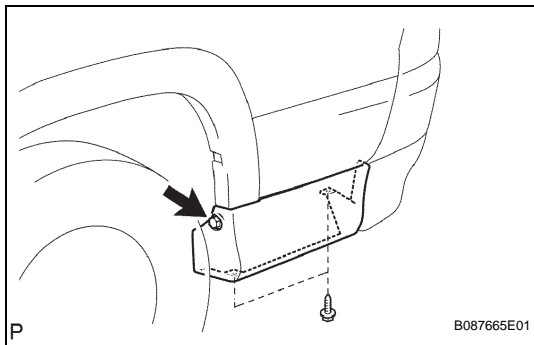


- (d) Tighten the 3 screws.

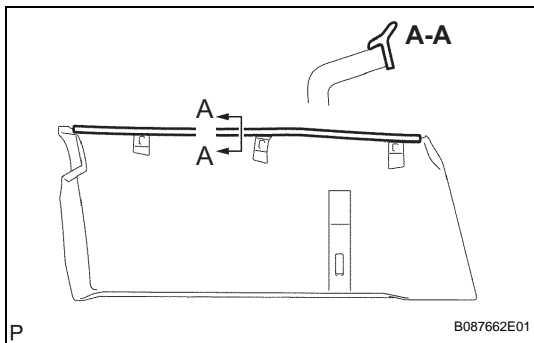

2. INSTALL BODY ROCKER PANEL MOULDING ASSEMBLY


- (a) Install new No. 2 body outside moulding pad in the position shown in the illustration.

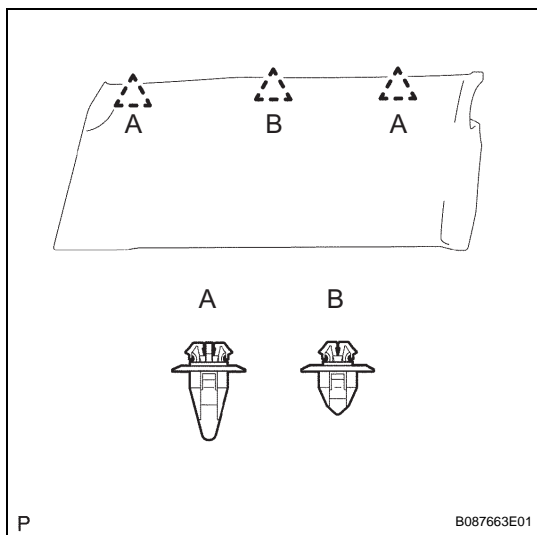


- (b) Install each clip in the position shown in the illustration.

NOTICE:


If you install the clips wrongly, the installation of the body rocker panel moulding would be improper.

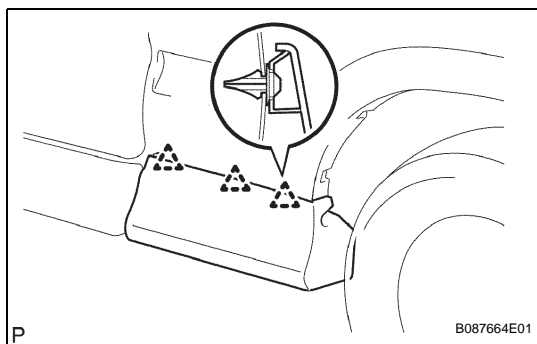

- (c) Engage the 3 claws and install the body rocker panel moulding.

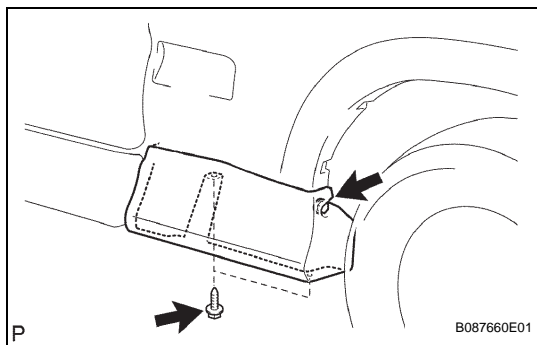


- (d) Tighten the 3 screws.

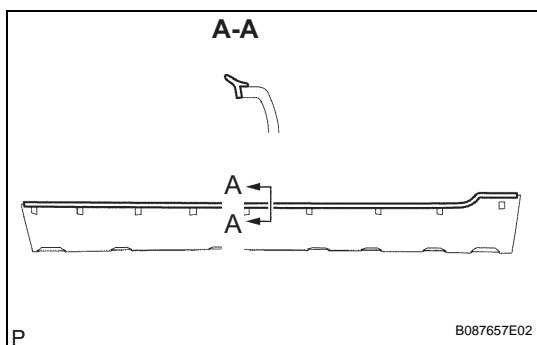

3. INSTALL ROCKER PANEL MOULDING


- (a) Install new No. 1 body outside moulding pad in the position shown in the illustration.

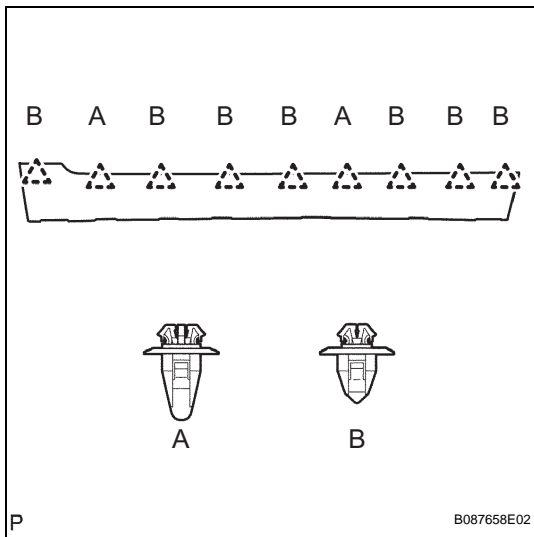


- (b) Install each clip in the position shown in the illustration.

NOTICE:

If you install the clips wrongly, the installation of the rocker panel moulding would be improper.

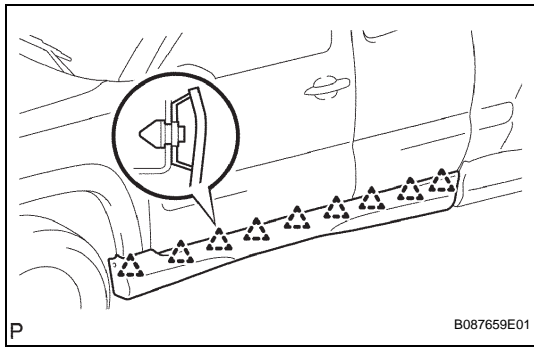

- (c) Engage the 9 clips and install the rocker panel moulding.

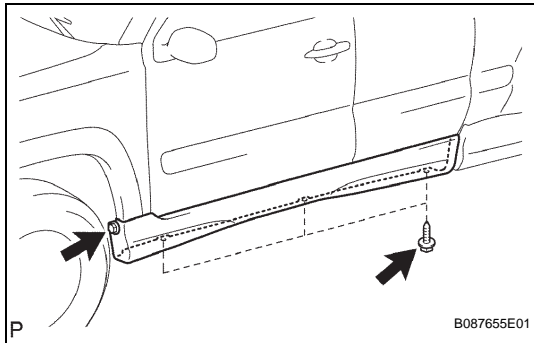

- (d) Tighten the 4 screws.