

PCIe tuner external power board rev C – bracket / USB-C / board edge

top view, mm. left: whole board 1:1. right: detail x6. origin (0, 0) = top-left corner of the board, x right, y down.

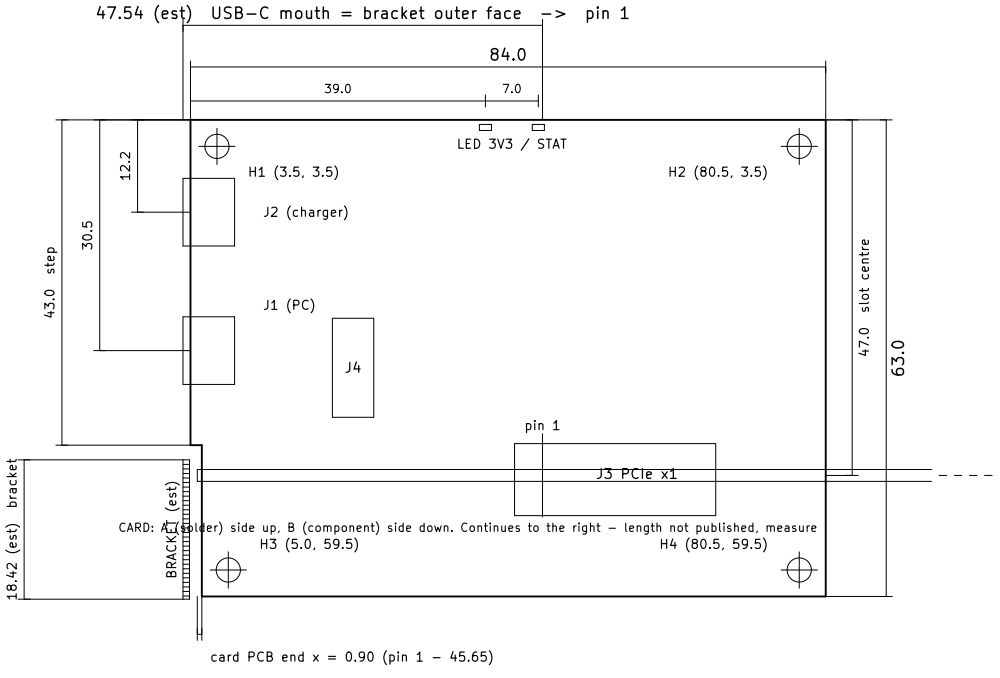

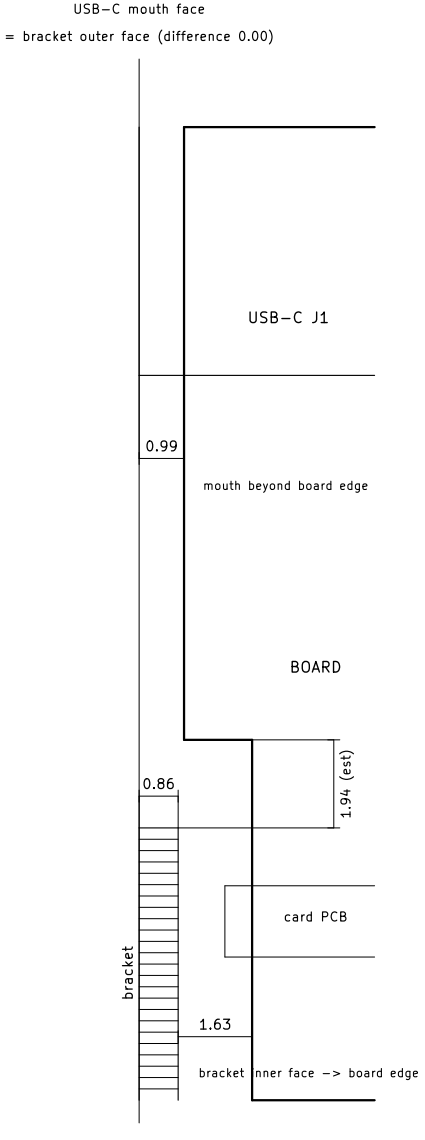

(est) = estimated value, to be measured on the real card and case before ordering:
- pin 1 centre to bracket outer face 47.54 (from a KiCad library built from PCIe CEM 1.2; CEM itself not read)
- bracket plate 0.86 thick, 18.42 wide: 2.06 (up to 2.5 by another reading) to the A side and 16.36 to the B side of the slot centre line (derived from PCIe CEM 2.0 figures 6-4 and 6-16)
- the bracket tongue goes below the board top surface (about 11.8 standard / 7.7 low profile), so the edge is set back 1.5 mm for y >= 43

USB-C mouth 0.99 beyond the board edge: outline of the JLCPCB (EasyEDA) footprint of TYPE-C-31-M-12; board edge is 5.79 from the rear shell legs (datasheet drawing). Case panel: inner face = bracket plate, so the mouth sticks 0.86 into the panel hole when the bracket is 0.86 thick.