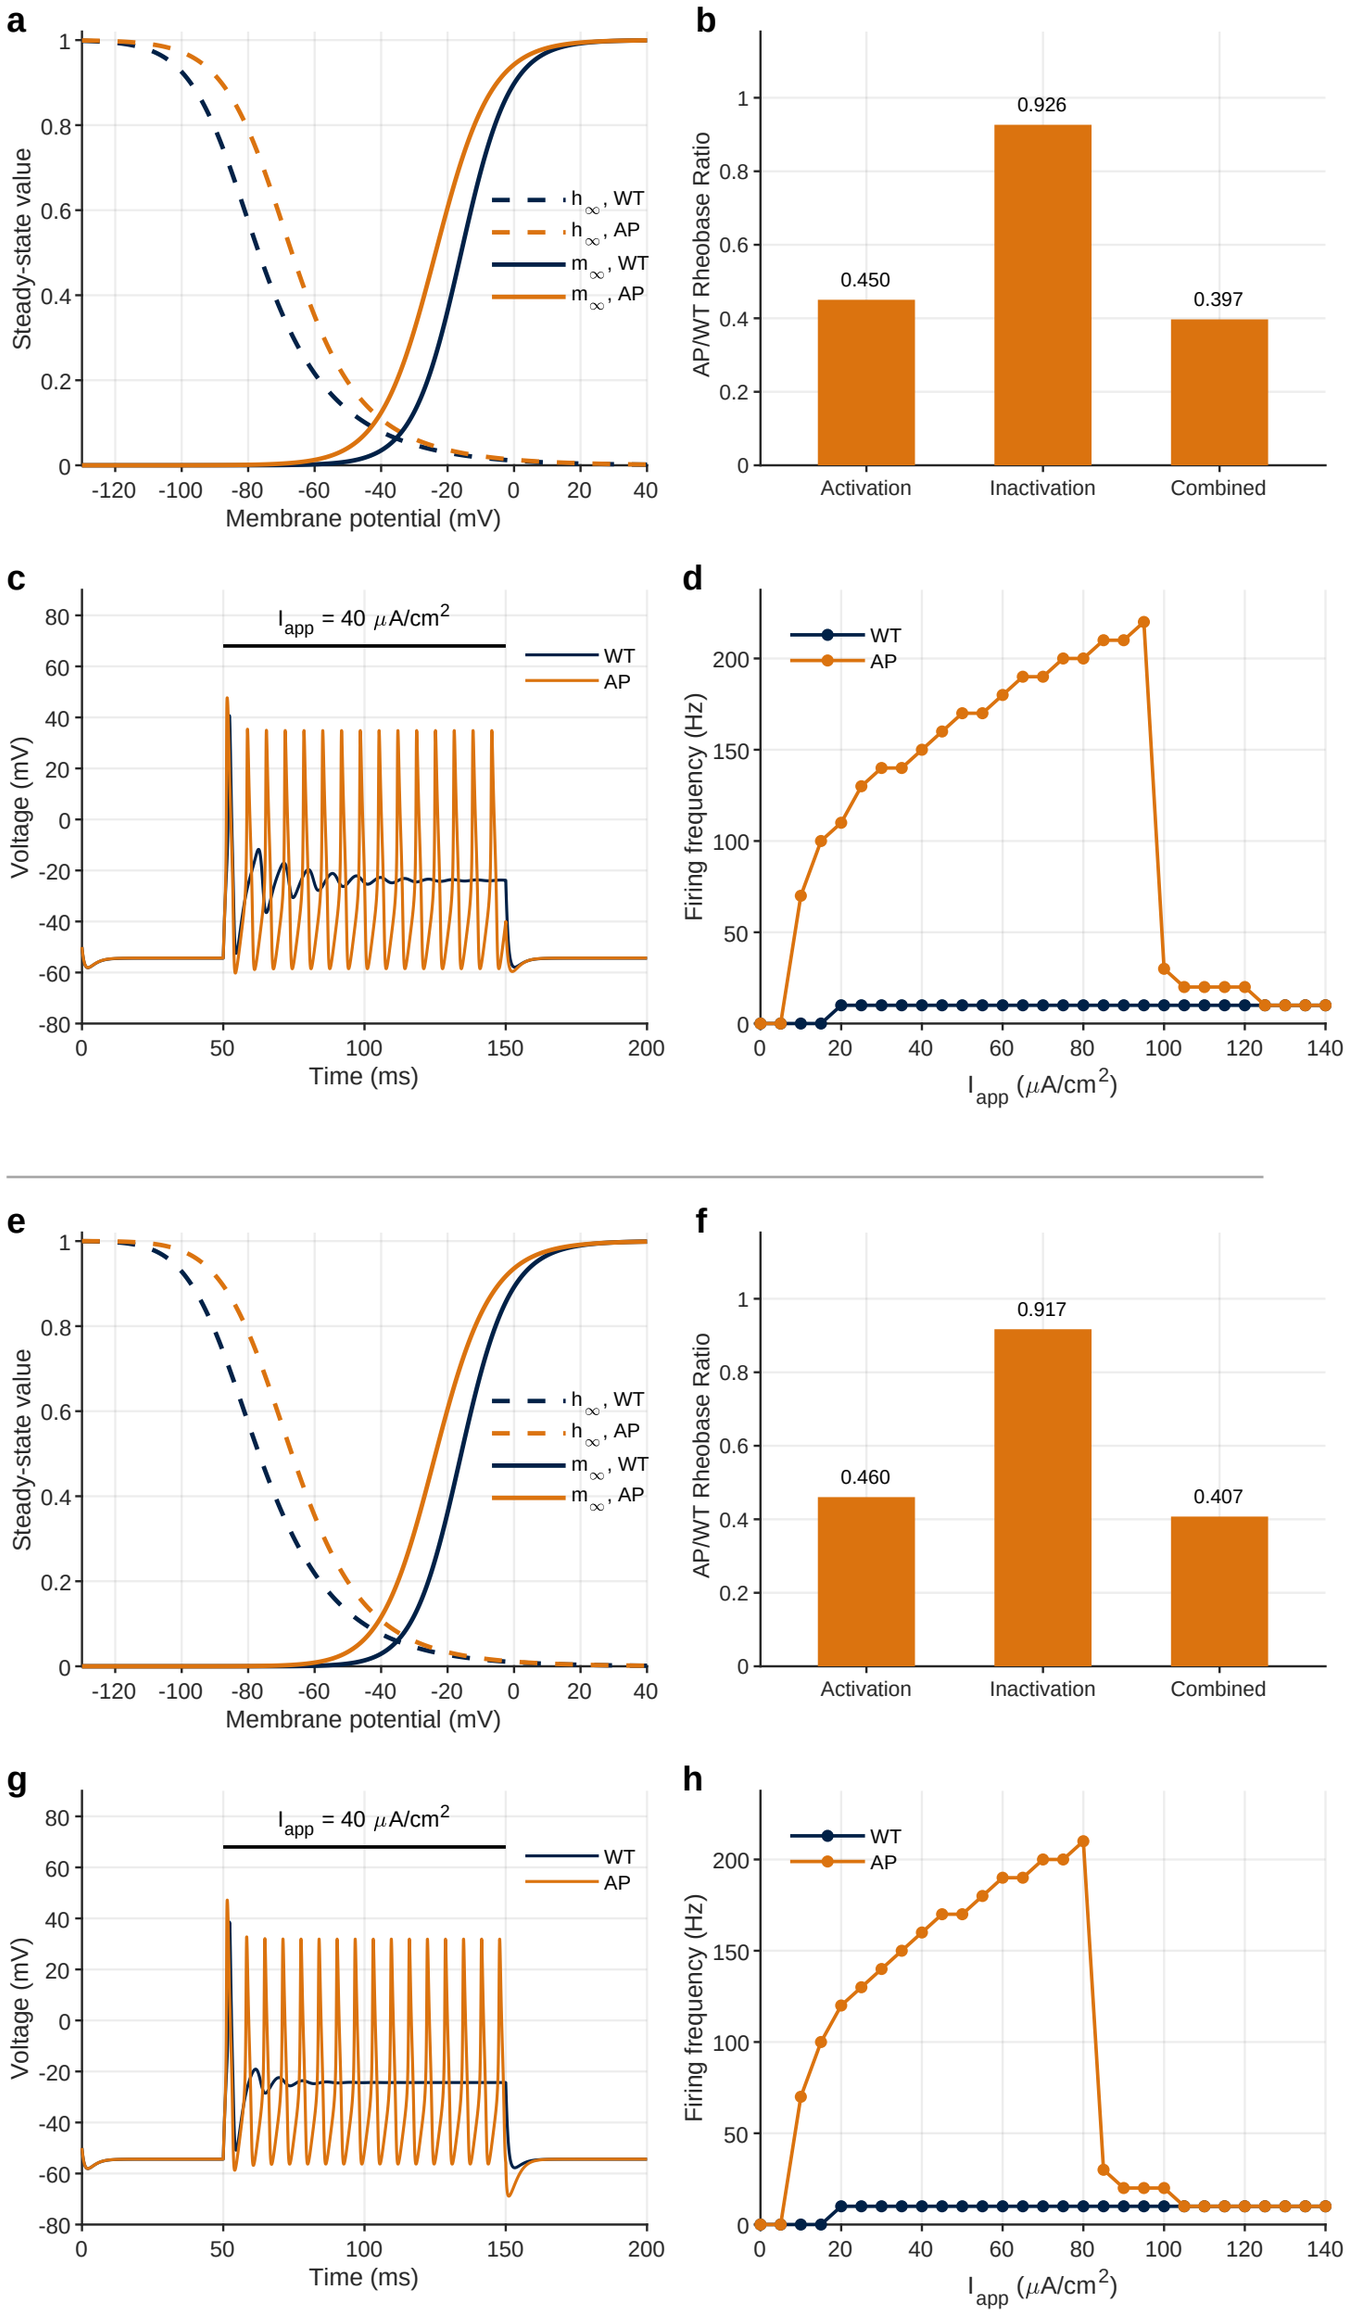

a
Steady-state value
Membrane potential (mV)
h∞, WT
h∞, AP
m∞, WT
m∞, AP
b
AP/WT Rheobase Ratio
0.450
0.926
0.397
Activation
Inactivation
Combined
c
Iapp = 40 μA/cm2
Voltage (mV)
Time (ms)
WT
AP
d
Firing frequency (Hz)
Iapp (μA/cm2)
WT
AP
e
Steady-state value
Membrane potential (mV)
h∞, WT
h∞, AP
m∞, WT
m∞, AP
f
AP/WT Rheobase Ratio
0.460
0.917
0.407
Activation
Inactivation
Combined
g
Iapp = 40 μA/cm2
Voltage (mV)
Time (ms)
WT
AP
h
Firing frequency (Hz)
Iapp (μA/cm2)
WT
AP