

EX NO: 2b	CALCULATION AND VERIFICATION OF FREQUENCY DEVIATION AND MODULATION INDEX OF FM SIGNALS USING MATLAB SIMULATION
DATE:	

Objectives:

To generate a Frequency Modulated (FM) signal in MATLAB using specified message and carrier signal parameters, and to determine the frequency deviation and modulation index of the FM signal while analyzing the relationship between frequency deviation, message frequency, and modulation index.

PROGRAM (MATLAB CODE)

```

/MATLAB Drive/experiment_4.m
1 % Calculation and Verification of Frequency Deviation
2 % and Modulation Index of FM Signal
3
4 clc;
5 clear;
6 close all;
7
8 %% Message Signal Parameters
9 Am = 2; % Message amplitude (V)
10 fm = 500; % Message frequency (Hz)
11
12 %% Carrier Signal Parameters
13 Ac = 1; % Carrier amplitude (V)
14 fc = 10000; % Carrier frequency (Hz)
15
16 %% FM Parameters
17 kf = 250; % Frequency sensitivity (Hz/V)
18 fs = 100000; % Sampling frequency (Hz)
19 T = 0.01; % Simulation duration (s)
20
21 %% Time Vector
22 t = 0:1/fs:T;
23
24 %% Message Signal
25 m = Am*cos(2*pi*fm*t);
26
27 %% Frequency Deviation
28 delta_f = kf*Am;
29
30 %% Modulation Index
31 beta = delta_f/fm;
32
33 %% FM Signal
34 fm_signal = Ac*cos(2*pi*fc*t + beta*sin(2*pi*fm*t));
35
36 %% Display Parameters
37 fprintf('Carrier Frequency (fc) = %.0f Hz\n', fc);
38 fprintf('Message Frequency (fm) = %.0f Hz\n', fm);
39 fprintf('Message Amplitude (Am) = %.0f V\n', Am);
40 fprintf('Frequency Sensitivity (kf) = %.0f Hz/V\n', kf);
41
42 fprintf('\nFrequency Deviation (Delta f) = %.2f Hz\n', delta_f);
43 fprintf('Modulation Index (Beta) = %.2f\n', beta);
44
45 %% Verification
46 beta_verify = delta_f/fm;
47
48 fprintf('Verified Modulation Index = %.2f\n', beta_verify);
49
50 %% Verification Check
51 tolerance = 1e-6;
52
53 if abs(beta - beta_verify) < tolerance
54     fprintf('\nVerification Successful\n');
55 else
56     fprintf('\nVerification Failed\n');
57 end
58
59 %% Plotting
60 figure;
61
62 subplot(2,1,1);
63 plot(t, m, 'LineWidth', 1.5);
64 grid on;
65 title('Message Signal');
66 xlabel('Time (s)');
67 ylabel('Amplitude (V)');
68
69 subplot(2,1,2);
70 plot(t, fm_signal, 'LineWidth', 1);
71 grid on;
72 title('FM Signal');
73 xlabel('Time (s)');
74 ylabel('Amplitude (V)');
```

Procedure

1. Open MATLAB and create a new script file.
2. Clear the command window, workspace variables, and close all previously opened figure windows using:

```
Clc;  
Clear;  
close all;
```
3. Define the message signal parameters:
 - Message amplitude $A_m=2V$
 - Message frequency $f_m=500Hz$
4. Define the carrier signal parameters:
 - Carrier amplitude $A_c=1V$
 - Carrier frequency $f_c=10000Hz$
5. Define the frequency sensitivity constant k_f , sampling frequency f_s , and simulation duration T
6. Generate the time vector using:
 $t = 0:1/f_s:T;$
7. Generate the message signal using:
 $m = A_m \cdot \cos(2\pi \cdot f_m \cdot t);$
and observe the sinusoidal waveform.
8. Calculate the frequency deviation of the FM signal using:
 $\Delta f = k_f \cdot A_m$
9. Calculate the modulation index using:
 $\beta = \Delta f / f_m$
10. Generate the FM signal using:
 $fm_signal = A_c \cdot \cos(2\pi \cdot f_c \cdot t + \beta \cdot \sin(2\pi \cdot f_m \cdot t));$
where the carrier frequency varies according to the message signal.
11. Plot the message signal in the first subplot and label the axes appropriately.
12. Plot the FM signal in the second subplot and observe the variation in instantaneous frequency.
13. Display the carrier frequency, message frequency, message amplitude, and frequency sensitivity in the MATLAB command window using `fprintf` statements.
14. Display the calculated frequency deviation and modulation index values in the command window.
15. Verify the modulation index by recomputing it using:
 $\beta = \Delta f / f_m$

- and compare the result with the previously calculated value.
16. Use a conditional statement (if-else) to check whether both modulation index values are equal within a small tolerance.
 17. Display the verification result as:
 - "Verification Successful" if both values match.
 - "Verification Failed" otherwise.
 18. Execute the MATLAB program and observe the message signal, FM signal, calculated frequency deviation, modulation index, and verification result.

OUTPUT


```
Command Window

Carrier Frequency (fc) = 10000 Hz
Message Frequency (fm) = 500 Hz
Message Amplitude (Am) = 2 V
Frequency Sensitivity (kf) = 250 Hz/V

Frequency Deviation (Delta f) = 500.00 Hz
Modulation Index (Beta) = 1.00
Verified Modulation Index = 1.00

Verification Successful
... |
```

OUTPUT GRAPH

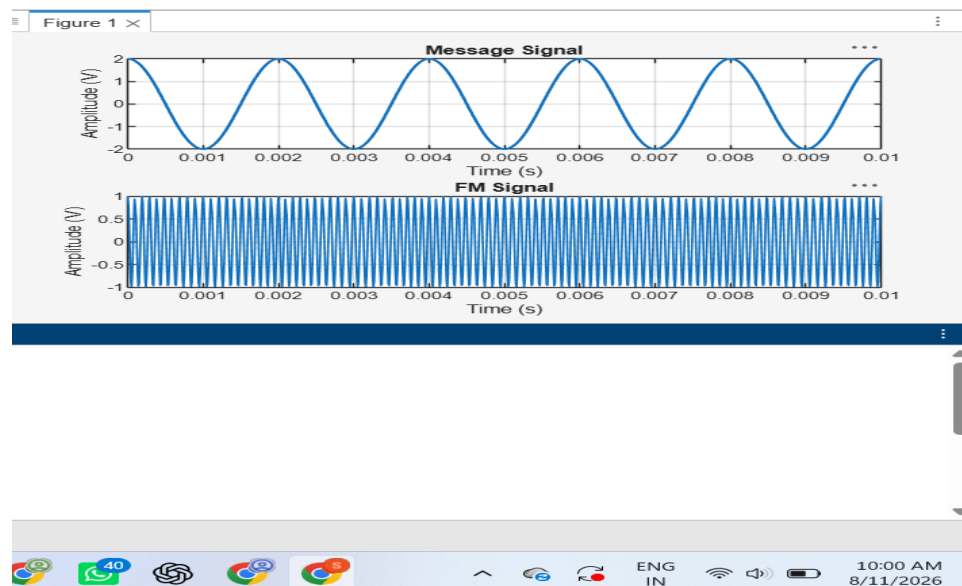

Result

This experiment verifies that the modulation index is equal to the ratio of frequency deviation to message frequency, i.e., $\beta = \Delta f / f_m$.