

FIXME - the name of your project

Final Report for CSM6960 Major Project

Author: Stefan Klaus (stk4@aber.ac.uk)

Supervisor: Dr. Myra Wilson (mxw@aber.ac.uk)

18th July 2015

Version: 0.1 (Draft)

This report was submitted as partial fulfilment of a MSc degree in
Intelligent Systems (G496)

Department of Computer Science
Aberystwyth University
Aberystwyth
Ceredigion
SY23 3DB
Wales, UK

Declaration of originality

In signing below, I confirm that:

- This submission is my own work, except where clearly indicated.
- I understand that there are severe penalties for plagiarism and other unfair practice, which can lead to loss of marks or even the withholding of a degree.
- I have read the sections on unfair practice in the Students' Examinations Handbook and the relevant sections of the current Student Handbook of the Department of Computer Science.
- I understand and agree to abide by the University's regulations governing these issues.

Signature

Date

Consent to share this work

In signing below, I hereby agree to this dissertation being made available to other students and academic staff of the Aberystwyth Computer Science Department.

Signature

Date

Acknowledgements

I am grateful to...

I'd like to thank...

Abstract

Include an abstract for your project. This should be no more than 300 words.

CONTENTS

1	Background & Objectives	1
1.1	Aim of this project	1
1.2	Information about the project	1
1.2.1	Choice of development environment and programming language	1
1.2.2	Choice of robot	2
1.2.3	Choice of environment design	2
1.3	Analysis	2
1.3.1	Communications	2
1.3.2	Control Algorithm	3
1.3.3	Fitness Function	5
1.3.4	Localisation	5
1.3.5	Mapping	6
1.4	Process	7
2	Design	8
2.1	Overall Architecture	8
2.1.1	Control Algorithm	8
2.1.2	Artificial Neural Network	8
2.1.3	Fitness Function	11
2.1.4	Genetic Algorithm	12
2.2	Program set up	12
2.3	Mapping algorithm	12
2.3.1	Mapping procedure	12
2.3.2	Map visualisation	13
3	Implementation	15
3.1	Implementation of the GA assisted Artificial Neural Network	15
3.1.1	Constructor and genotype length computation	15
3.1.2	Initialisation	16
3.1.3	Step function	16
3.2	First fitness function and neural network performance test	16
3.3	Multi Robot movement	17
3.4	Mapping	18
3.4.1	Map initialisation	18
3.4.2	Calculate robot position on the map	18
3.4.3	Calculate the robots heading	19
3.4.4	Deciding which cell of the map to mark	20
3.5	Displaying the map	22
4	Testing	23
4.1	Overall Approach to Testing	23
4.2	Automated Testing	23
4.2.1	Unit Tests	23
4.2.2	User Interface Testing	23
4.2.3	Stress Testing	23
4.2.4	Other types of testing	23

4.3	Integration Testing	23
4.4	User Testing	23
5	Evaluation	24
	Appendices	25
A	Third-Party Code and Libraries	26
1.1	Range and Bearing reading	26
B	Code samples	28
2.1	Environment Design	28
2.2	GA assisted Artificial Neural Network	29
2.2.1	Constructor and genotype length computation	29
2.2.2	Initialisation	29
2.2.3	Step function	30
2.3	Test Environment for first fitness function	32
2.4	Map	32
2.4.1	Initialisation	32
2.4.2	Calculate Heading	33
2.4.3	Calculation of robot position on the map	34
2.4.4	Return the correct Sensor number	35
2.4.5	Decide which cells to mark	35
2.4.6	Map cells in the direct front of the robot	36
2.4.7	Map cells off the bow of the robot	37
2.4.8	Map cells to the side of the robot	37
2.4.9	Set Aft cells of the robot	38
	Annotated Bibliography	39

LIST OF FIGURES

1.1	Roulette Wheel Selection	4
1.2	E-Puck sensor placement	6
2.1	Representation of a shifting sigmoid function	9
2.2	Representation of the Neural Network	9
2.3	IR sensor response against distance	10
2.4	Activation range for unscaled inputs	10
2.5	Activation range for scaled inputs	11
3.1	Graphical representation of the headings and the corresponding degrees	19
3.2	Representation of the terminology used to describe the robot	20
B.1	Environment Design	28
B.2	Representation of the test environment for the first fitness function	32

LIST OF TABLES

2.1	Genetic Algorithm Parameters	12
2.2	Correlation between map cells and Robot sensors	13

Listings

3.1	Fitness function calculation to consider the distance between 2 robots	17
3.2	Mark a cell on the map	21
A.1	Code of the Range and Bearing function	26
B.1	GA assisted Artificial Neural Network constructor and genotype length computation	29
B.2	GA assisted Artificial Neural Network initialisation	29
B.3	GA assisted Artificial Neural Network step function	30
B.4	Map initialisation	32
B.5	Calculate the robots heading	33
B.6	Calculate the robot position on the map	34
B.7	Calculate sensor number	35
B.8	calculate which cells to mark	35
B.9	Code to set cells in front of the robot	36
B.10	Code to set cells off the bow of the robot	37
B.11	Code to set cells of the sides of the robot	37
B.12	Code to set cells to the aft of the robot	38

Chapter 1

Background & Objectives

1.1 Aim of this project

The goal of this project is to create a program that controls a swarm of E-Puck robots in order to map an environment.

The E-Pucks always need to stay in communication, as they share a global map.

The control algorithm is an Artificial Neural Network, a evolutionary algorithm.

The neural network is trained so that it will learn to develop a solution on its own. The benefit of neural networks are that they are extremely versatile. A trained neural network will perform very good even in an different environment. Neural networks also allow for quick reactions of robots with very little processing time once they are fully evolved.

1.2 Information about the project

1.2.1 Choice of development environment and programming language

Since the control algorithm for the robots is an artificial neural network its needs to be trained before it can be tested. Therefore a simulator is needed. The simulator chosen for this project has been created by Elio Tuci(elt7@aber.ac.uk) and Muhanad Hayder Mohammed(mhm4@aber.ac.uk) at Aberystwyth University.

The other candidate was Cyberbotics Webots¹.

The simulator by Elio Tuci was chosen since I worked with it throughout the second semester of this master course and therefore know it well. Other reasons include that simulator is build for the creation of evolutionary algorithms and already posses an implemented genetic algorithm.

At the beginning of the project it was deemed ambitious to create a working genetic algorithm as well as artificial neural network and train it to perform the tasks explained in this chapter.

The programming language chosen for this project is C++ as the simulator is written in it.

¹<http://goo.gl/BrPK98>

1.2.2 Choice of robot

The E-Puck² robot was chosen for this project as it is commercially available and versatile. The *standard* robot comes with 8 IR proximity sensors placed at different intervals around the robot. It is powered by lithium-ion battery that is easily chargeable. 2 stepper motors allows it to move [10].

Since the project is done in an simulator no direct worries need to be done for battery life, though such could be simulated by calculating battery usage. This is however not done for the sake of this project.

The E-Puck is also useful as there is a wide range of extensions boards available to it, and its bus interface makes it possible and easy to design and add extension boards. For this project the official Range and Bearing Board is used, more info about that can be found in section 1.3.1 [5].

1.2.3 Choice of environment design

An environment was designed to train the artificial neural network. The environment represents a large room through which the robot swarm moves. There are multiple obstacles placed throughout the room to train and test the swarms communication and mapping abilities. A representation of the created environment can be found in Appendix B.1 on page 28.

1.3 Analysis

1.3.1 Communications

The Communication capabilities of the E-Puck were analysed. The Standard E-Puck comes with bluetooth communication and possesses now WiFi capabilities.

Bluetooth communication for this project has been deemed infeasible as Bluetooth communications can take somewhere around 19.5 ± 4 seconds. A multi robot exploration and mapping project such as this requires almost constant communication, in which case bluetooth connection times of ~19 seconds are too long.

There are a few proposed ways to implement WiFi communications on the e-puck robot. One of the methods was proposed by Christopher M. Cianci *et al.* [2] is the creation and implementation of a WiFi extension board for the e-puck, enabling communication between ZigBee and other IEEE 802.15.4 compliant transceivers.

The designed communication board is based on the MSP430 Microcontroller³ and the Chipcon CC2420⁴ radio.

²<http://www.e-puck.org/index.php>

³<http://www.ti.com/product/msp430f169>

⁴<http://www.ti.com/product/cc2420>

Allowing the e-puck a communication range between 15cm and 5 meters.

However such an board is not commercially available and would need to be custom designed and build, which is outside the spectrum of this project.

For the purposes of this project the use of the official e-puck range and bearing board has been deemed appropriate, as it is would be commercially available.

The range and bearing board is an extension board for the E-Puck which allows for localisation and local communication between E-Pucks using infra-red transmission. The board is powered by its own processor and consists of 12 sets of IR emission/reception modules. The board was first designed and build by Guílrrez *et al.* [5].

1.3.2 Control Algorithm

The control algorithm for this project is an artificial neural network assisted by an genetic algorithm.

The background and use of those will be explain in further detail in this section.

1.3.2.1 Artificial Neural Network

The control algorithm used for this project is an artificial neural network(ANN). Artificial neural networks are inspired by the brain.

A biological brain functions by passing electrical signals through nodes, so called neurons. Neurons of the brain can be compared to simple Input/Output connectors which transmit pulse coded analogue information. The relation between a the inputs and outputs can be displayed a simple sigmoid function [7].

To a neuron not all inputs are the same however, different inputs(i.e. outputs from other neurons) have stronger influence on it than others, in neuroscience this is defined as synaptic weights.

This influence can be trained, in the course of a life a neuron *learns* to trust some inputs more than others, the same training is done in an artificial neural network. The synaptic weights are represented by the *weight* value each link between 2 nodes holds. This weight value is calculated and evolved using a genetic algorithm.

1.3.2.2 Genetic Algorithm

Genetic Algorithms(GA) are a evolutionary algorithm inspired by the genetics of living organism. An GA works by having a population of genes, which make out an chromosome. The genes in regard to this GA represent the weights used in the neural network.

A chromosome is constructed as followed, the first 1 gene holds a number representing the genotype length, in other words the number of genes in this chromosome and thereby the number of weights in the neural network. This number is calculated when the neural network is created at the start of the program and passed along to the GA.

The following genes represent each a weight for a specific link between 2 nodes in the neural network. The value is a number between 0 and 1.

The last gene in the chromosome holds the fitness assigned to this chromosome, which is calculated using the fitness function.

An genetic algorithms modifies the genes using operators which mimic their biological counterpart.

The genetic modifier described as *crossover* switches genes in chromosome to vary the genetic pool between generations.

This crossover can be done with either single genes, or groups of genes depending on the implementation, and of course any restrictions based on the nature of the data.

The other operator is mutation, which is the possibility that a random gene switches its value to another random value.

Which genes are chosen for crossover is based on the selection method implemented in the algorithm.

The third major part of an GA is the selection method, the method that is used to choose which chromosomes of the gene pool should carried over into the next generation.

The selection method implemented in this simulator is *Roulette Wheel Selection*. This selection method is part of the *Proportionate Reproduction* scheme this reproduction scheme chooses individuals to be carried over into the next generation based on their objective fitness function [4].

The basic part of the selection process is that the fittest individuals have the highest change to be carried over. This replicated nature in a way that a fitter individual tends to have a higher change of survival and will go forward to the mating pool of the next generation.

However weaker individuals(chromosomes) are not without a probabilistic change to get selected. It is called roulette wheel selection because its graphical representation is similar to a roulette wheel, as figure 1.1 shows [14].

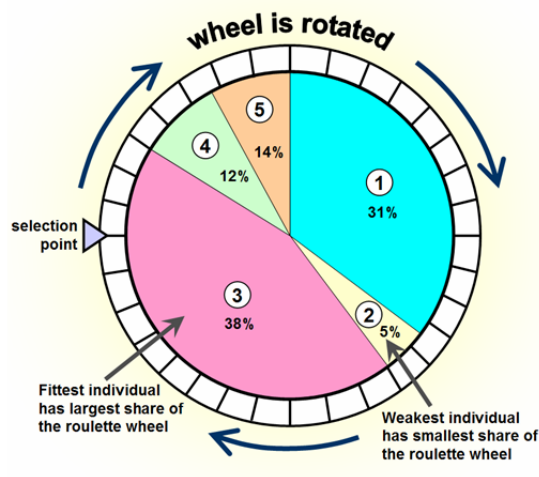


Figure 1.1: Roulette Wheel Selection⁵

As can be seen in figure 1.1 individuals with a higher fitness occupy a large of the overall available area.

⁵Image credit: Newcastle University Engineering and Design Center, accessed 7th of September 2015 <http://goo.gl/uwMSVB>

1.3.3 Fitness Function

A fitness function is used to guide the evolution of the neural network and the GA. It is used to rate the performance of a neural network based on a predefined formulae or criterion.

The baseline for the fitness function implemented in this project was proposed by Floreano *et al.* [3].

The proposed fitness function is a behavioural fitness function. This means it measures the quality of different features while a robot is performing its allocated task. It does not measure directly how well the robot does its allocated task, but rather measures various aspects of the robots behaviour and rates it [11]. This fitness function is a good baseline as it prevents the robot from stopping, spinning on the spot, and crashing into obstacles, but still being close enough to an obstacle to get a positive return (obstacle found) from at least 1 sensor reading.

This fitness function was expanded upon as new features were implemented to lead to more complex behaviour of the robot.

The final fitness function is shown and explained in Chapter 2.1.3 on page 11.

1.3.4 Localisation

In real life scenarios GPS information is not always available, especially when mapping the insight of buildings.

For the sake of this project the localisation and rotation readings are taken from the simulator.

While not realistic a time shortage prevented further development of a localisation algorithm. Thought went into the question of localisation and there are a couple of approaches which could be taken in future work to incorporate them.

One of the approaches is to use odometry, in which the robots position and location is calculated using the knowledge of how many steps the stepper motors did between readings and the wheel diameter of the robots wheels. Knowing how many *steps* equal a full rotation, in case of the E-Pucks motors this is 20 steps⁶, and the diameter of the robots wheels, around 41mm⁷, allows to calculate what distance the robot has driven in a straight line.

The rotation of a robot can be calculated using the same data combined with the knowledge of the robots wheelbase.

However odometry is not a perfect localisation method. Uncertainty about for example the robots wheel diameter, or a wrongly calibrated stepper motor can throw off the location and rotation calculation completely. In real world applications, or simulators which simulate real world properties such as friction between the wheels and the floor, can cause additional problems.

This *error* in the calculation and movement gets bigger overtime unless the localisation and rotation values stored in the robots memory are reset at certain intervals. In order to be able to reset it however exact knowledge of the location in the world is needed, not something possible in all environments.

Therefore odometry can be at best be seen as an estimate of the robots location and rotation.

Another possible approach is to locate a robot using another robots sensor, such as the IR sensors on the range and bearing board.

⁶e-puck.org website, accessed 8th of September, 2015, <http://goo.gl/YpQ2nf>

⁷e-puck.org website, accessed 8th of September, 2015, <http://goo.gl/YpQ2nf>

However without prior knowledge of where the *searching* robot is in the world it is impossible to calculate the location of the *searched after* robot, only its distance and bearing from the *searching* robot.

This knowledge might be enough for some applications, however there are also limits to the localisation possibilities using this approach. IR sensors beams widen over distance, meaning the error of a bearing's reading increases over distance. Therefore there is a limit to how large distances a robot's location can be calculated using this.

Thoughts went also into combining both the odometry calculations with the range and bearing information of the robot, however a shortage of time led to that no method was implemented in the system.

1.3.5 Mapping

To map the environment the E-Pucks IR sensors are used.

Using the knowledge of the robot's position as well as the sensor read out it is possible to calculate the position of an obstacle in regard to the robot.

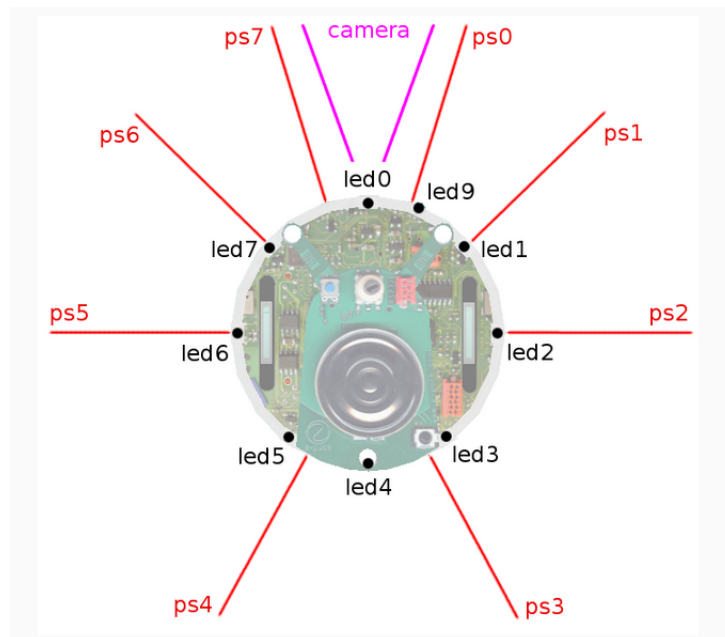


Figure 1.2: E-Puck sensor placement

Figure 1.2 shows the placement of the robot's IR sensors, labelled *ps0* through *ps7*. With the knowledge of where a particular sensor is placed on the robot combined with the knowledge of the robot's position, rotation and the return of the IR reading, it is possible to calculate the placement of an obstacle in the environment.

The robots all share a single global map, which is updated with the position of all robots, as well as the position of any encountered obstacles, at each iteration.

The map itself is a standard occupancy grid map: a 2 dimensional grid where each cell can have 1 of 3 possible values: 0 = unexplored, 1 = obstacle, 2 = robot position.

1.4 Process

The life cycle model used for this project is "Feature Driven Development" (FDD) as it seems the more appropriate for this project than other models, such as extreme programming or test driven development.

The reason FDD is more appropriate is that this is a single person project, as well as the requirements allowed for easy distinguish in which order features need to be implemented.

For example: the controller(neural network) needs to be implemented to be able to train it. Once the it is implemented and the robots are able to move based on its control, the communication between the robots can be implemented. Only once this is done and tested the mapping algorithm can be started to be developed, as the features build on each other.

The milestones of the project rather small and incremental "upgrades" on each other. For example the fitness function went from "move in certain direction" to "move in a certain direction and avoid obstacles" to much later "move throughout the environment, don't spin at the same spot, avoid crashing into obstacles but be close enough to map them and stay in communication range with other robots".

Chapter 2

Design

2.1 Overall Architecture

2.1.1 Control Algorithm

In this section the design of the control algorithm will be explained.

2.1.2 Artificial Neural Network

The robot swarm is controlled by an artificial neural network.

The neural network is consistent of 8 inputs, 3 hidden nodes, and 4 outputs.

There are bias nodes connected to the hidden and output layer, both of which are always set to 1. A representation of the network is shown in figure 2.2. The ANN is a multilayer feed forward network, meaning all layers nodes are connected to all nodes in the following layer and that data is only passed forward in the network, never back as would be the case using a different type of neural network, like a backpropagation algorithm.

The inputs are taken from the E-Pucks 8 IR proximity sensors. The hidden layer consists of 3 hidden nodes, which give more computational depth to the network.

From the 4 outputs of the neural the speed of the 2 stepper motors of the e-puck are calculated. This is done by calculating the difference between them.

The weights of the neural network are generated by a Genetic algorithm, which is part of the used simulator. The genes created by the GA are a value between 0 and 1, however the neural network algorithm scales them to be a value between -5 and 5.

The reason for scaling is explained in section 2.1.2.2 of this chapter.

The bias is needed to be able to shift the entire sigmoid function along the x axis.

¹Image credit Stackoverflow, accessed 8th of September, 2015 <http://goo.gl/Vktx0X>

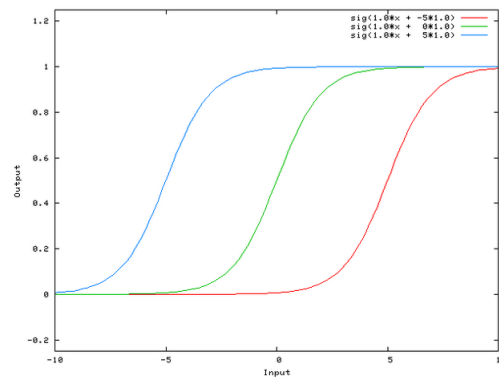
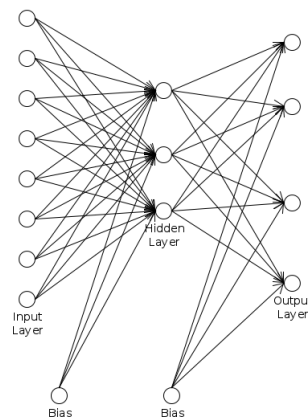
Figure 2.1: Representation of a shifting sigmoid function¹

Figure 2.2: Representation of the Neural Network

2.1.2.1 Input Layer

The inputs to the ANN are returned from the E-Pucks 8 IR sensors and are a value between 0 and 4096.


As can be in the in figure 2.3 the returned IR sensors value rises drastically after the robot comes closer to an obstacle than 3 centimetres.

2.1.2.2 Hidden Layer & Sigmoid Function

In the hidden layer the sum of all inputs to a node is multiplied by the weights to that node and than fed to sigmoid function.

A sigmoid function refers to a mathematical function that has an "S"(sigmoid) shape.

²Image credit: Webots User Guide <http://goo.gl/kyCINM>

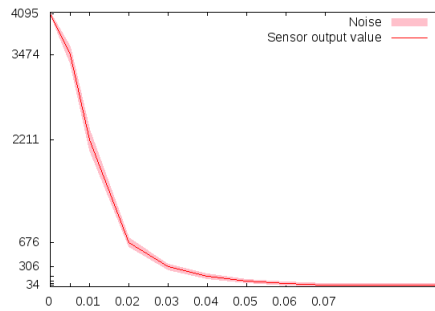Figure 2.3: IR sensor response against distance²

A sigmoid, or activation function, is an abstract representation of a neuron firing(activating) in the brain. There are a number of different approaches to activation functions, the simplest is a simple binary step function, with only 2 stages: *on* or *off*.

The activation function in this neural network is a sigmoid function which is given by:

$$S(x) = \frac{1}{1 + e^{-x}} \quad (1)$$

Where e represents *Euler's number* which is 2.71828[...] and x represents the input to the function, in this case the sum of all inputs multiplied by the weights.

The output of the sigmoid function is a number between 0 and 1.

Sufficient scaling of inputs is important as it increases the *range* of the activation functions calculation.

Figure 2.4 shows a graphical representation of this sigmoid function. The red lines represent the range on which an activation can happen if the inputs are between 0 and 1. Figure 2.5 however shows the area of activation if the inputs are between -5 and 5. The graph shows that scaled inputs have a higher activation range which leads to better performing networks.

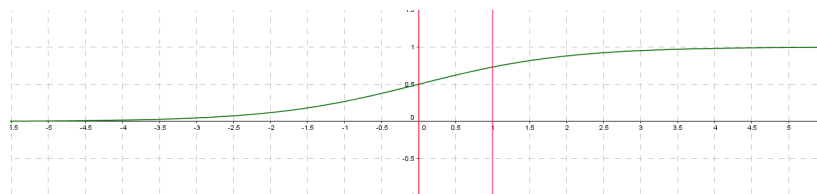


Figure 2.4: Activation range for unscaled inputs

2.1.2.3 Output Layer

In the outputlayer the outputs from the hiddenlayer are multiplied with their respective weights, and than passed to a sigmoid function again.

The output of the layer are than send back to the experiment class.

The velocity which will be set for each wheel is calculated by the difference between the 2 of the

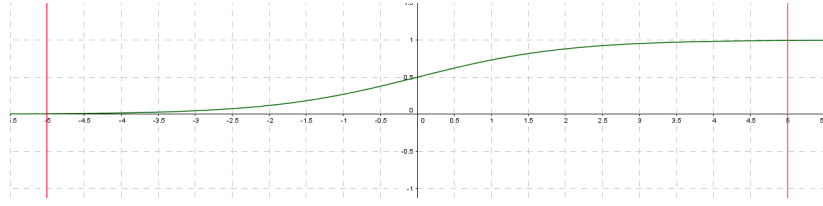


Figure 2.5: Activation range for scaled inputs

nodes. The *first* 2 nodes are used to calculate the velocity for the left wheel, the *last* 2 nodes for the right wheel.

2.1.3 Fitness Function

The fitness function is used to guide the evolution towards to the best solution.

The fitness function used in this project is as follows:

$$f = \text{mean}(V_l, V_r) \times (1 - \sqrt{|V_l - V_r|}) \times (1 - S_{ir}) \times \text{coms} \times \text{pos}_z \quad (2)$$

Where V_l and V_r represent the velocity of the left and right wheel, S_{ir} represents the highest IR sensor reading of the that iteration, coms represent the robots distance to a another robot in the swarm. pos_z represents the z position of the robot.

This is a modified version of a fitness function proposed by Floreano *et al.* [3].

Their fitness function, as is shown in equation 3, covers the basic movement rules for a robot.

$$f = \text{mean}(V_l, V_r) \times (1 - \sqrt{|V_l - V_r|}) \times (1 - S_{ir}) \quad (3)$$

In this equation the values are normalized to fit:

$$\begin{aligned} 0 &\leq V \leq 1 \\ 0 &\leq \Delta V \leq 1 \\ 0 &\leq S_{ir} \leq 1 \end{aligned}$$

Where V is the velocity of a wheel, here 0 would mean full speed backwards and 1 full speed forwards. Stand still is represented by a value of 0.5.

ΔV represents the absolute difference between the left and right wheel velocities.

The IR reading S_{ir} is normalized to a number between 0 and 1, where 1 would mean the robot is very close to an object, 0 would mean the sensor has no return at all, i.e. no object is in range. However the simulator introduces noise into system, similar to how there would be noise in a real world application. Therefore this value will never be exactly 0.

The standard values of the velocity are all in a range from -1 to 1 and have been normalized to 0 to 1 in order to ensure that the fitness function works properly [3].

The rationality behind the different *segments* of the fitness function is a follows: $\text{mean}(V_l, V_r)$ is the average between the velocities, this ensures that the robot does not stand still as stopping would prevent the fitness value of increasing. This is also means that the fitness is increasing when the robot is turning.

$1 - \sqrt{|V_l - V_r|}$ motivates the robots to move in a straight line rather than driving in large circles. $1 - S_{ir}$ does reward the robot for not crashing into walls as the normalized function does return 1 when the robot is close to colliding with an obstacle, this would mean this sub-calculation would return 0.

$coms$ represents the the distance between it and another robot. The higher the value the better, this prevents the robots from driving close to each other, and gets them to drive at the full extent of their communication range. If the robots pass a certain distance this value is set to 0.

2.1.4 Genetic Algorithm

The genetic algorithm was not implemented for the sake of this project, it is build into the simulator. Therefore only the parameters used for the GA and their effect on the evolution process will be covered here

The GA parameters used for this:

Number of Chromosomes	100
Number of Elite	20
Probability of Mutation	5%
Probability of Crossover	30%

Table 2.1: Genetic Algorithm Parameters

The number of chromosomes defines the size of the gene pool.

A number of 100 chromosomes are generated each generation. Of those an elite of 20 chromosomes with the best assigned fitness function is chosen using the roulette wheel selection method to be taken to the next generation.

A gene has a 30% change to be selected to be part of a crossover operation. All genes have also a 5% change to be mutated.

2.2 Program set up

The user specifies the user environment and other simulator parameters, such as how many robots to use, how many generations to evolve, iteration length per generation, where and how often to save genomes.

2.3 Mapping algorithm

2.3.1 Mapping procedure

The mapping algorithm works by locating the robot, using the simulators inbuilt functions.

The robots share a global map, the map itself is a 2D occupancy grid. Where each cell can have

one of 3 possible values:

0	=	Unexplored
1	=	Occupied
2	=	Robot's Position

The entire map is initialised to be 0 in the beginning. For this project each cell is defined as a space a robot can move through.

If a robot is located only partially between 2 cells, its location will be rounded or down, depending on its coordinates, so that it is always assumed that the complete robot is inside a cell.

To map the right cells it is important about to know the heading of the robot. This is done by taken the robots rotation and assigning one of pre-defined headings to it based on it.

The possible headings are inspired by compass direction and are: North, East, South, West, North-East, South-East, South-West, North-West.

Once the robots position and heading are known surrounding cells can be marked based on the IR sensors readings. Since a cell has a the same dimensions as a robot(which has a diameter of 70 mm, and the IR sensor has a range of about 4cm(when an obstacle can still be located with any form of certainty, see figure 2.3 on page 10 for more information, the robot is only able to map any cells adjacent to the cell occupied by the robot.

Knowledge of the robot's sensor placement allows for easy determinate which cell to mark as occupied based on the IR sensor activation value.

PS6	PS7 & PS0	PS1
	↑	
PS5	Robot Heading	PS2
	PS4 & PS3	

Table 2.2: Correlation between map cells and Robot sensors

Table 2.2 shows a representation of how robot sensors correlate to to the adjacent cells of where the robot is located. Here *PS* stands for *proximity sensor* followed by the sensor number. See figure 1.2 on page 6 for a graphical representation of the E-Puck robot and its sensors.

Knowing the robots location, heading, and sensor activation a cell is easily modified using by taken the robots X and Y coordinates and increasing or decreasing both of them to correspond with the cell which needs to be marked. This is done using the above representation as guideline. Every iteration each robot marks its position on the map with '2' and each found occupied cell as '1'.

2.3.2 Map visualisation

In order do visualize the map, the X and Y coordinates of all cells marked with '1' are saved to a text file.

This file can be loaded into a different program and be visualized using the C++ SDL2 library.

Chapter 3

Implementation

This chapter is divided into multiple smaller sections.

The first sections will describe how the neural network was implemented, and cover the evolution of the fitness function and the test done using the neural network.

Following the implementation of the mapping, communication and visualisation algorithms will be covered in detail. Throughout the chapter updated fitness functions will be shown and the changes made to both the fitness function and the algorithm reflected upon and explained why they were done.

This structure is meant to show the reader how the program *evolved* and why changes were made in the order they were implemented.

3.1 Implementation of the GA assisted Artificial Neural Network

The artificial neural network(ANN) inherits the simulators controller framework, and uses the inbuilt genetic algorithm to evolve the weights used in the neural network.

The network implementation in itself was swift and easy as different neural networks had been implemented during different assignments in one of this years modules.

The following subsections will explain what the different functions in the neural network do.

3.1.1 Constructor and genotype length computation

The code for this can be found in Appendix B 2.2.1 on page 29.

The constructor is used to initialise the neural network. Upon initialisation it calls a function to calculate the genotype length, the amount of genes needed for all weights in the network. This number is passed to the genetic algorithm so that the required number of genes can be created.

The number of required genes is calculated by multiplying the number of nodes of the different layer with each other and then summing the results of that calculation.

3.1.2 Initialisation

The code for this function can be seen in Appendix B 2.2.2 on page 29.

This function initialised the arrays needed for the neural network. It also takes a vector of *genes* as a parameter, this vector holds the genes as they have been evolved by the genetic algorithm.

The genes are scaled according to be in a range of -5 to 5, refer to section: 2.1.2.2 on page 9 for more information as to why gene scaling is important.

The scaled genes are assigned to a 2D array representing the weights of the neural network.

3.1.3 Step function

In the step function is called every iteration. The network calculates the outputs based on the inputs, the evolved weights and the calculations done in the hidden and output layer of the network. The code for this function can be seen in Appendix B 2.2.3 on page 30

After the neural network was implemented work on the fitness function was started in order to test the performance of the neural network.

3.2 First fitness function and neural network performance test

The first fitness function was a behavioural fitness function as proposed by Floreano *et al.* [3]. This builds the basis for all following changes to the fitness function.

$$f = \text{mean}(V_l, V_r) \times (1 - \sqrt{|V_l - V_r|}) \times (1 - S_{ir}) \times \text{pos}_y \quad (1)$$

Equation 1 shows the base fitness function that was implemented at this point.

A thorough analysis and explanation of the base fitness function can be found in chapter 2 section 2.1.3 on page 11. First tests had shown that the standard fitness function is not able to move the robot, as the robot never started moving. To counter this problem the pos_y was added to the function. Pos_y represents the robots position on the y axis, so the robot is rewarded for increasing its y position, by moving downwards in the environment.

The reason that the standard fitness function alone was not able to move the robot was that the robot spawned to far away from an obstacle so $1 - S_{ir}$ was not able to return any number. In their papers Floreano *et al.* [3] as well as Nelson *et al.* [11], which implemented Floreano's fitness function, the environment was designed so that the robot always had a positive sensor return. As this was not the case in this test environment the fitness function needed to be modified.

With the modified fitness function the robot was able to traverse most of the environment, only the small cap in the between the 2 boxes at the end of the environment proved to be a problem.

Code for this specific fitness function will not be shown, as its components are still included in later fitness functions. It has therefore been deemed unnecessary to duplicate the code multiple times. The code will be shown in and explained in a later part of this chapter when the final fitness function is discussed.

The test environment in which the neural network and this fitness function was tested can be seen

in figure B.2 on page 32.

It was not deemed necessary that the robot would need to finish the test environment, the test was meant to show if the neural network is able to evolve and guide the robot as well setting up a base level fitness function which could move a robot while avoiding obstacles.

After this the environment which can be seen in figure B.1 on page 28 was implemented, and work on the next milestone began: multi-robot movement.

3.3 Multi Robot movement

After the simple movement algorithm was implemented work on coordinated multi-robot movement was started.

Minor changes needed to be to the experiment class, while it was designed to work with multiple agents(robots) some functions only called the first element of the vector of agents by default. These were easily changed to iterate over the vector.

An algorithm which is able to measure and return the distance and bearing information between 2 robots was needed in order to be able to move the robots in any form of formation. After talking with Muhanad about it, he said that he has code for that already written and has allowed the usage of said code in this project. The code can be seen in appendix A section 1.1 on page 26. The code needs the location of a robot to measure too. It only needs this one location as it's locates the robot the function is called from on its own using the simulators inbuilt functions. The second parameter passed to the function is a pointer to an vector, which the algorithm will save its results too.

The function only returns when the distance between the robots is less than a user defined distance. After integrating this function into the program this distance value was set the 0.4, which equals 40cm for testing purposes.

In order to test the the algorithm another computation was added to the fitness function, the new computation added the distance between 2 robots into the calculation.

$$f = \text{mean}(V_l, V_r) \times (1 - \sqrt{|V_l - V_r|}) \times (1 - S_{ir}) \times pos_y \times dist \quad (2)$$

Where *dist* is the distance between 2 robots. Using this calculation the robot will try to reach the maximum extend of the maximum distance value defined by the user. As larger distance between directly increases the fitness value.

The code that was added for this calculation can be seen in listing 3.3.

Listing 3.1: Fitness function calculation to consider the distance between 2 robots

```
double comp_4 = 0.0;
if (param->num_agents != 1) {
    if (r == param->num_agents) {
```

```

        param->agent[r]->get_randb_reading(param->agent[r -
            1]->get_pos(), randB_reading);
        comp_4 = randB_reading[0];
    }
    else {
        param->agent[r]->get_randb_reading(param->agent[r +
            1]->get_pos(), randB_reading);
        comp_4 = randB_reading[0];
    }
}

```

Note that this is the code is a snippet of the fitness function as it was used at this point in the development and there are some problems with this approach.

There were a couple of problems with this approach at the time. Note that the code is designed to only use either the robot next or previous in the array of the robots, which lead to that robots would always form groups of 2 and stick together, while ignoring all other robots.

A problem with the design in itself was that the robot always tried to drive close to the maximum extend of the user defined range in order to get the maximum fitness value. This is problematic as even the slightest turn of one of the robots might lead to them losing *sight* of each other. Once this is happened the robots generally were not able to find back together. Once the robots are out of *sight* this part of their fitness calculation would be set to 0.

3.4 Mapping

After the basic where able to move in formation and the fitness function was able to navigate them through the environment working on the mapping algorithm was started.

3.4.1 Map initialisation

The initialisation function is shown in appendix B section 2.4.1 on page 32.

The method initialised a 2d array. In order to keep the array in memory it is an array of pointers which holds pointers to arrays rather than a simple 2d integer array.

All cells in the map are set to 0 after it has been initialised, and the pointer to an pointer to an array is returned to the experiment class, from where this method is called.

The map height and width are user defined in the class header file.

3.4.2 Calculate robot position on the map

The code for this function can be found in appendix b section 2.4.3 on page 34,

This function is used to calculate the robots position on the map based.

The reason the coordinates can not be taken directly from the simulator is that different coordinate systems are used. In the simulator the the coordinate '0' of the x coordinate is in the middle of the map, everything to the right of is positive anything the the left of the center is negative x . The y coordinate starts at the top of the environment and increases as its goes downwards.

The coordinate system of the map is that of an standard 2 dimensional array, with both '0' for both x and y at the top left corner, in an graphical representation.

The fact that the simulator is very likely to return negative x values based on its coordinate system has been countered by *simulating* the same coordinate system in the map by defining a map width and height value, which is user defined and also defines the dimensions of the map array.

The value of the map width is divided by 2, given the exact center of the map, which would correspond to '0.0' in the simulator. Any positive x values are added to this value to place it on the *right* side of the center, any negative values are subtracted so that they will be displayed on the left side of the center line.

As the robot might be located in between 2 cells of the map this function also handles the rounding of coordinates as needed. To do so the c++ math.h library is used to split the coordinate values of type *double* into integral and fractal parts, which allows for the rounding to happen.

Note that all the coordinates are timed by 1000. The reason for that is to scale them from the comparative small coordinates used for the development environment, where x can be a value between -0.6 and 0.6 and y a value between 0 and 2.0 to a value which could be used in the gui program. The gui handles the coordinates by pixels, so large numbers are needed in order to display them in any form that can be visualized.

3.4.3 Calculate the robots heading

The heading of a robot is calculated based on its movement direction.

This is needed in order to map the correct cells based on the robots directions. The code for this function can be found in appendix B section 2.4.2 on page 33.

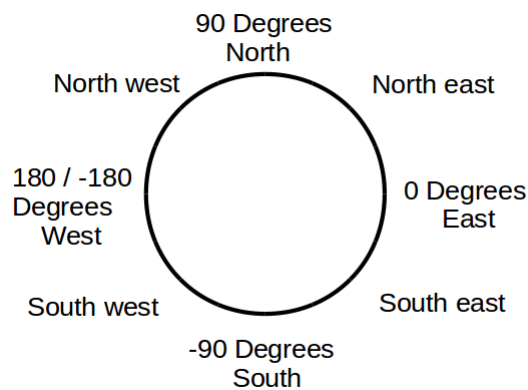


Figure 3.1: Graphical representation of the headings and the corresponding degrees

The heading is calculated based on the robots rotation, which is returned from the simulator. Rather than returning degrees from 0 to 360, the simulator returns degrees from 0 to 180 and -180 respectively.

The decision fell to handle the robots directions based on compass directions as it is very easy to interpret in which direction the robot is moving on a map.

There are some restrictions to when a heading is assigned. For the 4 main directions: north, east,

south, west a selection threshold of ± 10 degrees is chosen. For the *side* directions north east, south east, south west and north west a threshold of ± 5 degrees is chosen.

The reason for the threshold is it is unlikely for the robot to for example drive exactly 90 degrees. The threshold of ± 10 degrees was chosen as this gave the best results while mapping. Other thresholds such as ± 5 , 15, 20 were tried, but either gave a too large error or almost no mapping at all, in the case of 5, since the threshold was too small so a heading was never selected.

The threshold for the side directions was chosen to be less than for the main direction since moving at an angle increased the error rate already.

Here as well different thresholds were chosen, again increasing in steps of 5.

Results showed that the mapping error increased drastically when thresholds larger than 5 degrees were selected.

3.4.4 Deciding which cell of the map to mark

The algorithm to mark a cell in the map is divided into multiple smaller functions.

Note that to make describing the direction a sensor is mapping naval terms are borrowed.

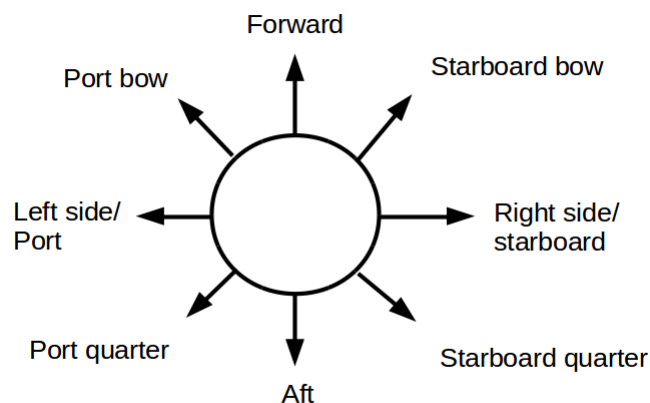


Figure 3.2: Representation of the terminology used to describe the robot

Figure 3.2 shows a representation of the naval terms borrowed and how they apply to the robot.

3.4.4.1 Return the correct sensor number

The IR reading function the robots does return an array, however the cells of that array do not correspond to the IR sensor with the same number. When the mapping function is called this function is used to determine which sensor was activated.

The code for this function can be found in appendix B section 2.4.4 on page 35. In each function the sensors which are used for the mapping are mentioned, refer to figure 1.2 on page 6 to see where the sensors are placed on the robot.

3.4.4.2 Control function of the mapping algorithm

As the mapping algorithm is split into multiple smaller functions the program requires a control function which decides which of those functions to call. The control algorithm receives a number of parameters, such as an vector holding the sensor readings, the heading of the robot, the robots x and y coordinates, and a pointer to the map.

It uses the previously explained function to return the correct sensor number and than calls one of the following functions accordingly to the information it was given. The code for this function can be found in appendix B section 2.4.5 on page 35.

3.4.4.3 Set cells in front of the robot

The code for this function can be found in appendix B section 2.4.6 on page 36. This function is used to set the cells directly in front of the robot, using sensor 0 and 7 on the robot. This function takes the heading, the sensor number, the robots x and y coordinates as well as a pointer to the map as the parameters, the same goes for all other functions in this section.

3.4.4.4 Set cells off the bow of the robot

The code for this function can be found in appendix B section 2.4.7 on page 37.

This function is used to map cell to the front left and front right of the robot. This sensors used for this function are sensor 1 & 6 on the robot.

3.4.4.5 Set cells to the sides of the robot

This function used to set the cells to side of the robot, the corresponding robot sensors are 2 and 5. The code for this function can be seen in appendix B section 2.4.8 on page 37.

3.4.4.6 Set cells in the back of the robot

The code for this function can be found in appendix B section 2.4.9 on page 38. This code is used to map cells directly behind the robot, the corresponding robot sensors are 4 and 3.

Since a single cell is the size of the robot sensor 4 & 3 are only able to map a cell right behind the robot. The reason for that being that while sensor 1 & 6 are placed at a 45 degree angle and therefore are able to map cells to the front left and front right sensor 4 & 3 and placed at a much smaller angle.

3.4.4.7 Marking a cell in the map

This function is is used to mark a cell in the map. The other functions in this section calculate which cell to mark and than call this function in order to mark it on the map.

Listing 3.2: Mark a cell on the map

```
void Occupancy_Map::mark_cell(int x_coord, int y_coord, int mark,
    int** matrix) {

    matrix[x_coord][y_coord] = mark;
}
```

3.5 Displaying the map

Chapter 4

Testing

4.1 Overall Approach to Testing

4.2 Automated Testing

4.2.1 Unit Tests

4.2.2 User Interface Testing

4.2.3 Stress Testing

4.2.4 Other types of testing

4.3 Integration Testing

4.4 User Testing

Chapter 5

Evaluation

Appendices

Appendix A

Third-Party Code and Libraries

1.1 Range and Bearing reading

This code was written by Muhanad Hayder Mohammed(mhml@aber.ac.uk).

This code is used to calculate the distance and bearing between 2 robots and return the results as an array. The first member of the array is the distance between 2 robots, and the second member is the bearing.

The code only returns when a result when the distance between the robots is below a user defined maximum distance. This distance can be changed by modifying the *work_range* variable(in this code snipped set to 0.4 = 40 cm).

Listing A.1: Code of the Range and Bearing function

```
double SIMPLE_Agents::get_ranb_reading( vector <double>
    _to_robot_pos, vector <double> &_reading){
    double work_range = 0.4;
    randb_from = btVector3(0.0,0.0,0.0);
    randb_to = btVector3(0.0,0.0,0.0);
    this->pos = this->get_pos();
    // get the distance between your robot and to destination robot
    "_to_robot_pos"
    double range =
        sqrt((( _to_robot_pos[0]-pos[0])*( _to_robot_pos[0]-pos[0]) +
            ( _to_robot_pos[2]-pos[2])*( _to_robot_pos[2]-pos[2])));
    if(range < work_range){
        _reading[0] = range;

        // get the robot orientation
        btMatrix3x3 m =
            btMatrix3x3(body->getWorldTransform().getRotation());
        double rfPAngle = btAsin(-m[1][2]);
        if(rfPAngle < SIMD_HALF_PI){
            if(rfPAngle > -SIMD_HALF_PI) this->rotation =
                btAtan2(m[0][2],m[2][2]);
            else this->rotation = -btAtan2(-m[0][1],m[0][0]);
        }
        else this->rotation = btAtan2(-m[0][1],m[0][0]);
    }
```

```

// check the collision accross the distance between your robot
// and destination robot
randb_from =
    btVector3(_to_robot_pos[0],_to_robot_pos[1]+0.025,_to_robot_pos[2]);
randb_to = btVector3(pos[0], pos[1]+0.025, pos[2]);
btCollisionWorld::ClosestRayResultCallback res(randb_from,
    randb_to);
this->world->rayTest(randb_from, randb_to, res);
if(res.hasHit()){
    World_Entity* object = (World_Entity*)
        res.m_collisionObject->getUserPointer();
    if(object->get_type_id() == ROBOT && object->get_index() ==
        this->index){

        double bearing,nest_angle,robot_angle;
        robot_angle =rotation;
        if(robot_angle<0.0)
            robot_angle = TWO_PI + robot_angle;
        nest_angle = -atan2(_to_robot_pos[2]-pos[2],
            _to_robot_pos[0]-pos[0]);
        if(nest_angle <0.0)
            nest_angle = TWO_PI + nest_angle;
        bearing = nest_angle - robot_angle;
        if(bearing < 0.0)
            bearing = TWO_PI + bearing;
        //if you want to add noise bearing
        bearing += (gsl_rng_uniform_pos(
            GSL_randon_generator::r_rand )*0.30 - 0.15);
        _reading[1] = bearing;

    }
    randb_to =res.m_hitPointWorld;
}
}
}

```

Appendix B

Code samples

2.1 Environment Design

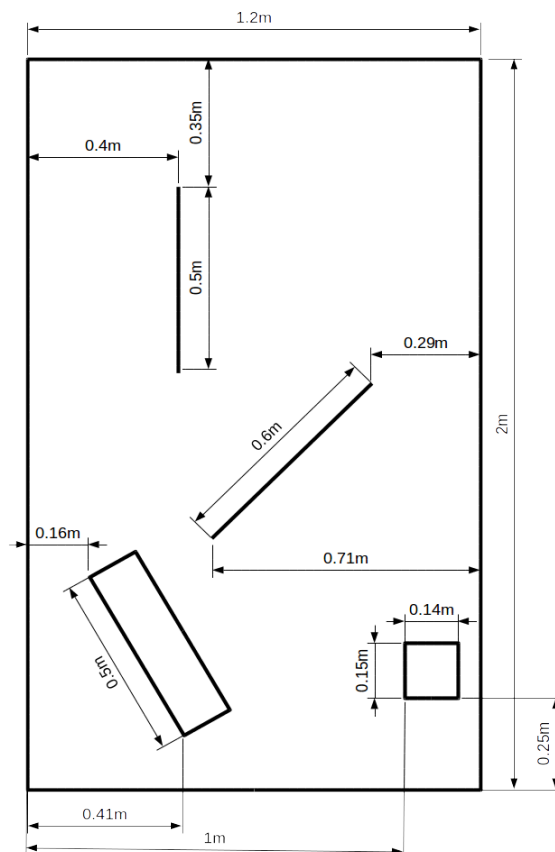


Figure B.1: Environment Design

2.2 GA assisted Artificial Neural Network

2.2.1 Constructor and genotype length computation

Here the constructor of the neural network is shown as well as the function that calculates the genotype length.

It also shows how the arrays that hold the nodes for the layers are declared. More information can be found in chapter 3 section 3.1.1 on page 15.

Listing B.1: GA assisted Artificial Neural Network constructor and genotype length computation

```
#include "myController.h"

double MyController::inputlayer[];
double MyController::hiddenlayer[];
double MyController::outputlayer[];

/*Constructor*/
MyController::MyController() {
    compute_genotype_length();
}

void MyController::compute_genotype_length ( void ){
    /*Input and hiddenlayer each have a BIAS node therefor + 1 */
    genotype_length = (((num_input+1) * hiddenlayer_size) +
        ((hiddenlayer_size + 1) * num_output));
}
```

2.2.2 Initialisation

This function initialises the arrays needed for the neural network, scales the genes and assigns the scaled values to the *weight* arrays. A more detailed explanation of this code can be found in chapter 3 section 3.1.2 on page 16.

Listing B.2: GA assisted Artificial Neural Network initialisation

```
void MyController::init ( const vector <chromosome_type> &genes ){
    // vector <double> new_gene; //vector to hold the scaled gene values
    double new_gene[genes.size()];
    /*initialize the layers*/
    for(int i = 0; i < num_input+1; i++){
        inputlayer[i] = 0.0;
    }

    for(int i = 0; i < num_output; i++){
        hiddenlayer[i] = 0.0;
    }

    for(int i = 0; i < hiddenlayer_size+1; i++){
        outputlayer[i] = 0.0;
    }
}
```

```

    /*Set new_genes to 0.0*/
    for(int i = 0;i < genes.size();i++){
        new_gene[i] = 0.0;
    }

    /*initialise the input-to-hiddenlayer weights*/
    for(int i = 0;i < num_input+1;i++){
        for(int j = 0;j < hiddenlayer_size;j++){
            weights1[i][j] = 0.0;
        }
    }
    /*initialise the hidden-to-outputlayer weights*/
    for(int m = 0;m < hiddenlayer_size+1;m++){
        for(int n = 0;n < num_output;n++){
            weights2[m][n] = 0.0;
        }
    }

    /*scale the genes from -5 to 5*/
    for(int i = 0;i < genes.size();i++){
        new_gene[i] = ((high_bound - low_bound) * get_value(genes, i)) +
            low_bound;
    }

    /*set the weights*/
    int counter = 0;
    for(int i = 0;i < num_input+1;i++){
        for(int j = 0;j < hiddenlayer_size;j++){
            weights1[i][j] = new_gene[counter];
            counter++;
        }
    }
    for(int m = 0;m < hiddenlayer_size+1;m++){
        for(int n = 0;n < num_output;n++){
            weights2[m][n] = new_gene[counter];
            counter++;
        }
    }
}

```

2.2.3 Step function

In this function the neural network calculates the outputs based on its inputs, the evolved weights, as well as the calculations done in the hidden and output layer.

More details on this function can be found in chapter 3 section 3.1.3 on page 16.

Listing B.3: GA assisted Artificial Neural Network step function

```

void MyController::step ( const vector <double> &input, vector
    <double> &output){
    /*set values for the inputlayer*/
    for(int i = 0;i < input.size();i++){

```

```
    inputlayer[i] = get_value(input, i);
}

/*set Bias for the hiddenlayer*/
inputlayer[num_input] = 1.0;

/*reset the outputlayer*/
for(int i = 0; i < num_output; i++){
    outputlayer[i] = 0.0;
}

/*add the weights from input to hiddenlayer*/
for(int i = 0; i < hiddenlayer_size; i++){
    for(int j = 0; j < num_input+1; j++){
        hiddenlayer[i] +=(inputlayer[j] * (weights1[j][i]));
    }
}

/*calculate the sigmoid for the hiddenlayer*/
for(int i = 0; i < hiddenlayer_size; i++){
    hiddenlayer[i] = f_sigmoid(hiddenlayer[i]);
}

/*add the bias for the outputlayer*/
hiddenlayer[hiddenlayer_size] = 1.0;

/*add the weights from the hidden-to-outputlayer*/
for(int i = 0; i < num_output; i++){
    for(int j = 0; j < hiddenlayer_size+1; j++){
        outputlayer[i] +=(hiddenlayer[j] * (weights2[j][i]));
    }
}

/*calculate the sigmoid for the outputlayer*/
for(int i = 0; i < num_output; i++){
    output[i] = f_sigmoid(outputlayer[i]);
}
}
```

2.3 Test Environment for first fitness function

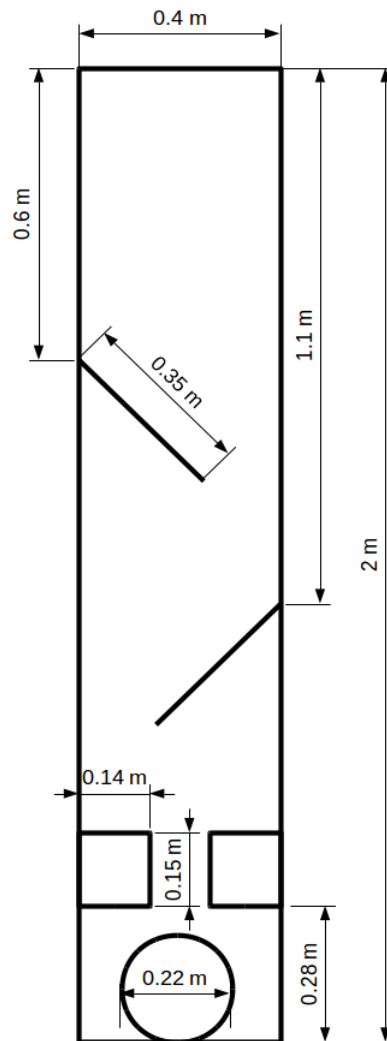


Figure B.2: Representation of the test environment for the first fitness function

2.4 Map

2.4.1 Initialisation

In this function the map is initialised.

All cells in the map are set to 0 and returns a pointer to a pointer to the array. Further explanation the code can be found in chapter 3 section 3.4.1 on page 18.

Listing B.4: Map initialisation

```

int** Occupancy_Map::init() {
    map = new int *[map_height]; //initialise array of pointers
    for(int i = 0;i < map_height;i++){ //add array pointers to the array
        map[i] = new int[map_width];
    }

    for(int i = 0;i < map_height;i++){
        for(int j = 0;j < map_width;j++){
            map[i][j] = 0;
        }
    }

    return map;
}

```

2.4.2 Calculate Heading

Listing B.5: Calculate the robots heading

```

/* 0: north, 1: east, 2: south, 3: west, 4: northeast, 5: southeast,
   6: southwest, 7: northwest
 * +/- 10 spread for main headings(north, south, east, west)
 * +/- 5 spread for secondary headings(northeast, southeast, etc)*/
int Occupancy_Map::calc_heading(double rotation) {
    int heading;
    if(rotation <= 10 && rotation >= -10){
        heading = 1;
    }
    else if(rotation <= 100 && rotation >= 80){
        heading = 0;
    }
    else if(rotation >= -170 && rotation >= 170){
        heading = 3;
    }
    else if(rotation <= -80 && rotation >= -100){
        heading = 2;
    }
    else if(rotation <= 50 && rotation >= 40){
        heading = 4;
    }
    else if(rotation <= -40 && rotation >= -50){
        heading = 5;
    }
    else if(rotation <= -130 && rotation >= -140){
        heading = 6;
    }
    else if(rotation <= 140 && rotation >= 130){
        heading = 7;
    }
    else{
        heading = -1;
    }
}

```

```
    return heading;
}
```

2.4.3 Calculation of robot position on the map

This function calculates robots coordinates on the map.

Further explanation of this function can be found in chapter 3 section 3.4.2 on page 18.

Listing B.6: Calculate the robot position on the map

```
int* Occupancy_Map::calc_robot_pos(double x_coord, double y_coord){
    int matrix_x = 0;
    int matrix_y = 0;
    int *array = new int[2];
    double integral, fractal ;

    if(x_coord > 0.0 ){
        x_coord = x_coord * 1000;
        fractal = modf(x_coord, &integral);
        if(fractal < 0.5){
            x_coord = integral;
        }
        else if(fractal > 0.5){
            x_coord = integral + 1;
        }
        matrix_x = (map_width/2) + x_coord;
        matrix_y = y_coord * 1000;

    }else if(x_coord < 0.0){
        x_coord -= x_coord*2;
        x_coord = x_coord * 1000;

        fractal = modf(x_coord, &integral);
        if(fractal < 0.5){
            x_coord = integral;
        }
        else if(fractal > 0.5){
            x_coord = integral + 1;
        }

        matrix_x = (map_width/2) - x_coord;
        matrix_y = y_coord * 1000;
    }

    array[0] = matrix_x;
    array[1] = matrix_y;

    return array;
}
```

2.4.4 Return the correct Sensor number

This function is used to return the correct sensor number. The reason this function was needed was because in the array returned by the IR reading function the cells of the array do not correspond to the same sensor number.

More information on this method can be found in chapter 3 section 3.4.4.1 on page 20

Listing B.7: Calculate sensor number

```
int Occupancy_Map::calc_sensor(int array_num) {
    int sensor_num;

    if(array_num == 0){
        sensor_num = 0;
    }
    else if(array_num == 1){
        sensor_num == 7;
    }
    else if(array_num == 2){
        sensor_num == 1;
    }
    else if(array_num == 3){
        sensor_num == 6;
    }
    else if(array_num == 4){
        sensor_num == 2;
    }
    else if(array_num == 5){
        sensor_num == 5;
    }
    else if(array_num == 6){
        sensor_num == 3;
    }
    else if(array_num == 7){
        sensor_num == 4;
    }

    return sensor_num;
}
```

2.4.5 Decide which cells to mark

This function is used to analyse which mapping function to call based on the activated sensor number.

Further analysis of this function can be found in chapter 3 section 3.4.4.2 on page 21.

Listing B.8: calculate which cells to mark

```
void Occupancy_Map::calc_matrix_values(vector <double> &ir_reading,
    int heading, int robot_x, int robot_y, int **matrix){
    double sensor_value;
    int sensor_num;
```

```

for(int i = 0; i < ir_reading.size(); i++){
    sensor_value = ir_reading[i];
    if(sensor_value != -1){
        sensor_num = calc_sensor(i);
        if(heading == 0 || heading == 1 || heading == 2 || heading ==
            3){
            if(sensor_num == 0 || sensor_num == 7){
                set_front_cells(heading, sensor_num, robot_x, robot_y,
                    matrix);
            }
            else if(sensor_num == 6 || sensor_num == 1){
                set_front_side_cells(heading, sensor_num, robot_x,
                    robot_y, matrix);
            }
            else if(sensor_num == 5 || sensor_num == 2){
                set_side_cells(heading, sensor_num, robot_x, robot_y,
                    matrix);
            }
            else if(sensor_num == 3 || sensor_num == 4){
                set_aft_cells(heading, sensor_num, robot_x, robot_y,
                    matrix);
            }
        } else if(heading == 4 || heading == 5 || heading == 6 ||
            heading == 7){
            set_angeld_cells(heading, sensor_num, robot_x, robot_y,
                matrix);
        }
    }
}
}

```

2.4.6 Map cells in the direct front of the robot

The robot

Listing B.9: Code to set cells in front of the robot

```

/*Sensors set on a 15 degree angle to the front of the robot. Sensor 7
and 0 on the robot*/
void Occupancy_Map::set_front_cells(int heading, int sensor, int
    robot_x, int robot_y, int **matrix) {
    if(heading == 0){
        mark_cell(robot_x, robot_y-1, 1, matrix);
    }
    else if(heading == 1){
        mark_cell(robot_x+1, robot_y, 1, matrix);
    }
    else if(heading == 2){
        mark_cell(robot_x, robot_y+1, 1, matrix);
    }
    else if(heading == 3){
        mark_cell(robot_x-1, robot_y, 1, matrix);
    }
}

```

```

    }
}

```

2.4.7 Map cells off the bow of the robot

Listing B.10: Code to set cells off the bow of the robot

```

/*Sensors placed in a 45 degree angle on the front of the robot.
   sensor 1 and 6 on the robot*/
void Occupancy_Map::set_front_side_cells(int heading, int sensor, int
robot_x, int robot_y, int **matrix) {
    if(sensor == 1){
        if(heading == 0){
            mark_cell(robot_x+1, robot_y-1, 1, matrix);
        }
        else if(heading == 1){
            mark_cell(robot_x+1, robot_y+1, 1, matrix);
        }
        else if(heading == 2){
            mark_cell(robot_x-1, robot_y+1, 1, matrix);
        }
        else if(heading == 3){
            mark_cell(robot_x-1, robot_y-1, 1, matrix);
        }
    }
    else if(sensor == 6){
        if(heading == 0){
            mark_cell(robot_x-1, robot_y-1, 1, matrix);
        }
        else if(heading == 1){
            mark_cell(robot_x+1, robot_y-1, 1, matrix);
        }
        else if(heading == 2){
            mark_cell(robot_x+1, robot_y+1, 1, matrix);
        }
        else if(heading == 3){
            mark_cell(robot_x-1, robot_y+1, 1, matrix);
        }
    }
}
}

```

2.4.8 Map cells to the side of the robot

Listing B.11: Code to set cells of the sides of the robot

```

/*Side sensors placed at a 90 degree angle. 2 and 5 on the epuck */
void Occupancy_Map:: set_side_cells(int heading, int sensor, int
robot_x, int robot_y, int **matrix) {
    if(sensor == 2){
        if(heading == 0){

```

```

        mark_cell(robot_x+1, robot_y, 1, matrix);
    }
    else if(heading == 1){
        mark_cell(robot_x, robot_y+1, 1, matrix);
    }
    else if(heading == 2){
        mark_cell(robot_x-1, robot_y, 1, matrix);
    }
    else if(heading == 3){
        mark_cell(robot_x, robot_y-1, 1, matrix);
    }
}
else if(sensor == 5){
    if(heading == 0){
        mark_cell(robot_x-1, robot_y, 1, matrix);
    }
    else if(heading == 1){
        mark_cell(robot_x, robot_y-1, 1, matrix);
    }
    else if(heading == 2){
        mark_cell(robot_x+1, robot_y, 1, matrix);
    }
    else if(heading == 3){
        mark_cell(robot_x, robot_y+1, 1, matrix);
    }
}
}
}

```

2.4.9 Set Aft cells of the robot

Listing B.12: Code to set cells to the aft of the robot

```

/*Sensors placed at a 25 degree angle to the back of the robot.
   Sensors 3 and 4 on the epuck*/
void Occupancy_Map::set_aft_cells(int heading, int sensor, int
    robot_x, int robot_y, int **matrix) {
    if(heading == 0){
        mark_cell(robot_x, robot_y+1, 1, matrix);
    }
    else if(heading == 1){
        mark_cell(robot_x-1, robot_y, 1, matrix);
    }
    else if(heading == 2){
        mark_cell(robot_x, robot_y-1, 1, matrix);
    }
    else if(heading == 3){
        mark_cell(robot_x+1, robot_y, 1, matrix);
    }
}
}

```

Annotated Bibliography

- [1] A. Birk and S. Carpin, “Merging Occupancy Grid Maps From Multiple Robots,” *Proceedings of the IEEE*, vol. 94, no. 7, pp. 1384–1397, July 2006. [Online]. Available: <http://dx.doi.org/10.1109/jproc.2006.876965>
- [2] C. Cianci, X. Raemy, J. Pugh, and A. Martinoli, “Communication in a Swarm of Miniature Robots: The e-Puck as an Educational Tool for Swarm Robotics,” in *Swarm Robotics*, ser. Lecture Notes in Computer Science, E. Şahin, W. Spears, and A. Winfield, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 2007, vol. 4433, ch. 7, pp. 103–115. [Online]. Available: http://dx.doi.org/10.1007/978-3-540-71541-2_7
- [3] D. Floreano and F. Mondada, “Evolution of homing navigation in a real mobile robot,” *Systems, Man, and Cybernetics, Part B: Cybernetics, IEEE Transactions on*, vol. 26, no. 3, pp. 396–407, Jun 1996.
- [4] D. E. Goldberg and K. Deb, “A comparative analysis of selection schemes used in genetic algorithms,” *Foundations of genetic algorithms*, vol. 1, pp. 69–93, 1991.
- [5] A. Gutiérrez, A. Campo, M. Dorigo, D. Amor, L. Magdalena, and F. Monasterio-Huelin, “An Open Localization and Local Communication Embodied Sensor,” *Sensors*, vol. 8, no. 11, pp. 7545–7563, Nov. 2008. [Online]. Available: <http://dx.doi.org/10.3390/s8117545>
- [6] A. Gutiérrez, A. Campo, M. Dorigo, D. Amor, L. Magdalena, and F. Monasterio-Huelin, “An open localization and local communication embodied sensor,” *Sensors*, vol. 8, no. 11, pp. 7545–7563, 2008.
- [7] J. Hopfield, “Artificial neural networks,” *Circuits and Devices Magazine, IEEE*, vol. 4, no. 5, pp. 3–10, Sept 1988.
- [8] R. Kala, A. Shukla, and R. Tiwari, “Robotic path planning using evolutionary momentum-based exploration,” *Journal of Experimental & Theoretical Artificial Intelligence*, vol. 23, no. 4, pp. 469–495, July 2011. [Online]. Available: <http://dx.doi.org/10.1080/0952813x.2010.490963>
- [9] Q. Meng and M. H. Lee, “Active Exploration in Building Hierarchical Neural Networks for Robotics,” in *Instrumentation and Measurement Technology Conference, 2006. IMTC 2006. Proceedings of the IEEE*. IEEE, Apr. 2006, pp. 2095–2100. [Online]. Available: <http://dx.doi.org/10.1109/imtc.2006.328464>
- [10] F. Mondada, M. Bonani, X. Raemy, J. Pugh, C. Cianci, A. Klapotocz, S. Magnenat, J.-C. Zufferey, D. Floreano, and A. Martinoli, “The e-puck, a robot designed for education in

- engineering,” in *Proceedings of the 9th conference on autonomous robot systems and competitions*, vol. 1, no. LIS-CONF-2009-004. IPCB: Instituto Politécnico de Castelo Branco, 2009, pp. 59–65.
- [11] A. L. Nelson, G. J. Barlow, and L. Doitsidis, “Fitness functions in evolutionary robotics: A survey and analysis,” *Robotics and Autonomous Systems*, vol. 57, no. 4, pp. 345–370, Apr. 2009. [Online]. Available: <http://dx.doi.org/10.1016/j.robot.2008.09.009>
- [12] S. Thrun, “Learning Occupancy Grid Maps with Forward Sensor Models,” *Autonomous Robots*, vol. 15, no. 2, pp. 111–127, Sept. 2003. [Online]. Available: <http://dx.doi.org/10.1023/a:1025584807625>
- [13] K. M. Wurm, A. Hornung, M. Bennewitz, C. Stachniss, and W. Burgard, “OctoMap: A probabilistic, flexible, and compact 3D map representation for robotic systems,” in *Proc. of the ICRA 2010 workshop on best practice in 3D perception and modeling for mobile manipulation*, vol. 2, 2010.
- [14] J. Zhong, X. Hu, M. Gu, and J. Zhang, “Comparison of performance between different selection strategies on simple genetic algorithms,” in *Computational Intelligence for Modelling, Control and Automation, 2005 and International Conference on Intelligent Agents, Web Technologies and Internet Commerce, International Conference on*, vol. 2, Nov 2005, pp. 1115–1121.