MX5PT HF & LF RFID Tabletop Reader

Part # MX5PT

MX5PT is a Tabletop Dual Frequency Reader Supporting 125 KHz Low Frequency and 13.56 MHz High Frequency RFID Cards all in one reader!

No need to purchase more than one reader, the MX5PT will help your organization to save money. With the Built in Flash Upgrade option, your hardware will always be up to date.

Ideal for varieties of applications, such as reading RFID Membership ID's, E-Credit Cards, E-Health Card or any other RFID Smart cards. Equipped with a multitude of configurations which are easily customized to your needs and applications.

Unlike any other reader on the market today, you will not need to stock different models to support USB VRS Serial, Keyboard, HID or Custom applications. Using the MX5 Utility you can select the desired communication (HID KB, VRS, HID Report output setting, save your changes into Flash memory of the MX5 device and your MX5 device is ready to meet your needs.

Fingerprint Module Available

Features & Benefits

- Cost Effective Solution to read on both 125Khz and 13.56 MHz RFID.
- EM, TK, AT, ISO14443A & ISO14443B, ISO15693 simultaneous Card Type reading Supported
- Built-in Data Encryption Option with the MX5 High Speed 32 bit Processor: Triple DES, AES128, Advanced Security Features and Masked Data
- Audible and LED Good Read and Error Indicator
- Programmable Sound & LED On/Off
- Flash Upgradable Firmware with Selectable HID KB, VRS (serial), USB-HID or Combo communication settings
- Auto Caps Lock Detection, Upper Case or Lower Case Option
- Built-in Boot Load Function for Easy Firmware Upgrade
- SDK-System Development Kits Available with DLL and Sample Source Code for R/W RFID HF
- Two Year Warranty

Specifications:

Supported Card Type	EM, TK, AT, ISO14443A , ISO14443B, ISO15693, SLE66CL simultaneous Card type UID Reading
Communications	Selectable HID KB, VRS (serial), USB-HID or Combo communication settings
Power	Via USB port
Current mA	65-100 mA
Connectors	USB Type A (Default) Also Available in PS2 Mini DIN6/DIN 5, RS232 DB9F using Cable Converter option
Cable Length	6 Ft (180 cm)(Default) also Available in 2 Ft (60 cm) and 15 Ft (450 cm)
Dimensions (LxWxH)	100 x 82 x 27 mm
Total Weight	120 g
Operating Temp.	- 20 C to 55 C
Humidity	10% - 90% relative humidity
Set-up Utility	Yes
RFID Frequencies	125Khz LF and 13.56Mhz HF
Programmable Sound & LED On/Off	Yes
Programmable Carriage Return	Yes
Programmable Inter character Delay	Fixed
Data Checking	Built-in, audible and LED good read and error indicator
Classification Supported	EM,TK,AT, ISO14443A, ISO14443B, ISO15693
Certifications	CE, FCC, UL, RoHS
Support Operating Systems	Win 11 / 10 / 7, Win 2008 , Unix, Linux, IOS
Warranty	2 years

USB to PS2 Converter Cable Available

USB to RS232 Converter Cable Available

Dimension View:

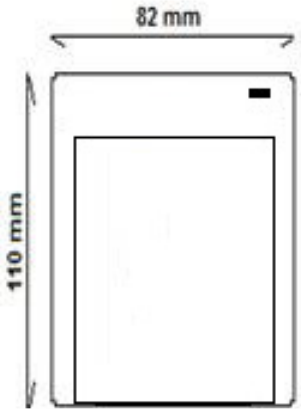

POSH MFG LTD
Canada
1-888-282-7674
www.poshmfg.com
sales@poshmfg.com

Fingerprint Specification:

Fingerprint Module	**TCETC1FF022**
Sensor Coating	FIPS 201 (gold coating)
Power	3.3 v, Powered by Device Fingerprint is installed on
Current	100 mA typical current used by Fingerprint device only
Fingerprint Image	2.8 x 18.0 mm (256 x 360 pixels) 508 dpi, 8-bit grayscale
Dimensions	23 mm x 35 mm x 4.1 mm
Interface	USB is internally Connected via 12 pin Flex cable
Humidity / Temp.	5% - 93% relative humidity , -30C to 70C
ESD	IEC 61000 - 4.2 level 4, +/- 15KV air, +/- 8KV contact
Certifications	FIPS 201 PIV Certified
Ingress Protection	IP65-rated top surface sealed against dust and liquid* (Fingerprint Module Only not device)
Storage	Can store up to approximately 100 user templates
Software	Includes broad software support from leading algorithm providers, ISV's and system integrators, Supports WSQ and JPEG2000 compression with the appropriate Software Development Kit.
Operating System	OS: Windows® 7, 8 and 10, Win CE, Linux®
Warranty	1 year

POSH MFG LTD
Canada
1-888-282-7674
www.poshmfg.com
sales@poshmfg.com

Specifications subject to change without notice