
DOSING PUMPS

HPD PUMP
MULTITHERM 200
3351





WITH COOLING JACKET

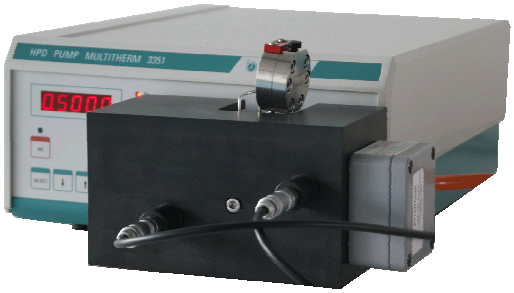

WITH HEATING JACKET


BISCHOFF CHROMATOGRAPHY

The new High Precision Dosing pump – Multitherm 200 model 3351
for ambient and / or high temperature metering of fluids.

The ***HPD Pump Multitherm 200 3351*** covers a wide area of applications with its possibilities of variable flow ranges from micro to large flow rates (depending on the pump head). As a high precision dosing pump it is a unique dosing unit for use at temperatures from – 5° C to 200° C in micro-process technology and mini-plants where high pressure and / or high temperature is needed.

Features:

- Maximum back pressure up to 600 bar (60 MPa)
- Easily exchangeable pump heads
  → customizable and service-friendly
- Liquid temperature range: -5° C - +200° C → cooled and heated
- For use with hot and / or aggressive media (Hastelloy C)
- Pump heads are thermically isolated →no temperature influence on pump drive and electronics
- Metering of highly viscous media
- Flexible control (RS-232, USB , analog)
- Double check valves for trouble-free metering

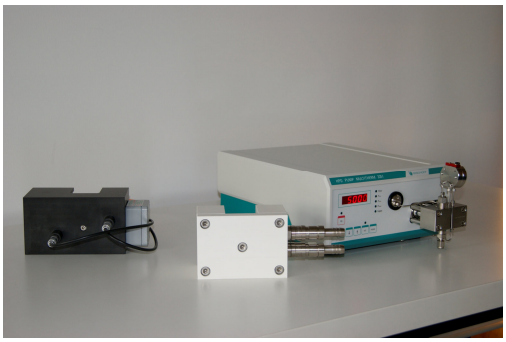

Technical data:

Operation Temperature:	- 5 °C to + 200 °C	**Pressure shut-off:**	for P min and P max
Temperature shut-off:	if set temperature is exceeded	**Compressibility:**	adjustable
Pump head identification:	via magnetic sensor	**Flow reproducibility:**	< 0.5 %
Residual Pressure Pulsation:	< 3 % typical 1%	**Flow rate accuracy:**	< 2 %
External Control:	analog 4 – 20 mA (Flow rate) 0 – 10 Volt (Flow rate) RS 232 / RS 485 USB; LAN (all functions)		
Power requirements:	90 – 264 V 50/60 Hz 100 W		
Dimensions:	381 x 255 x 130 mm (LxWxH)		
Weight:	7.0 kg	**P/N**	**3351 0000**



HT0 Flow: 1µl – 1000 µl/min
Pressure range: 0-60 MPa
P/N 2251 0100 (Stainless Steel)
P/N 2251 0100TI (Titanium)



HT1 Flow: 0.01 ml – 5.00 ml/min
Pressure range: 0-60 MPa
P/N 2251 0200 (Stainless Steel)
P/N 2251 0200TI (Titanium)
P/N 2251 0200HA (Hastelloy C)



HT2 Flow: 0.1 ml – 20.0 ml/min
Pressure range: 0-15 MPa
P/N 2251 0300 (Stainless Steel)
P/N 2251 0300HA (Hastelloy C)




HT3 Flow: 0.1 ml – 40.0 ml/min
Pressure range: 0-10 MPa
P/N 2251 0400 (Stainless Steel)
P/N 2251 0400HA (Hastelloy C)
(…400 HA available on request)

Pressure Transmitter
to isolate the pump drive from thermic influence we recommend to use a Pressure Transmitter

Pressure range: 0-60 MPa
P/N 2251 9810 (Stainless Steel)
P/N 2251 9810HA (Hastelloy C)





Cooling Jacket
Temperature range:
Ambient to – 5° C
Fits all pump heads

P/N 2251 1010
(Cryo Circulator required)



Heating Jacket
Temperature range:
Ambient to 200 °C
with integrated sensor
Fits all pump heads
P/N 2251 1000
(Temperature control unit required)



Thermo Control Unit TCU 200
(for use with heating jacket)
P/N 2251 2000
Lemosa Cable (2 required)
P/N 2251 2010

Your local distributor:

BISCHOFF ANALYSENTECHNIK UND – GERÄTE GMBH

BÖBLINGER STR. 23, D-71229 LEONBERG

TELEFON : +49-7152-6064-0

FAX: +49-7152-6064-34

e-mail: info@bischoff-chrom.de

internet: http://www.bischoff-chrom.de

BISCHOFF CHROMATOGRAPHY