

# GR VertiQ

SOLUTION SARL



↑ Patient Rooms  
+ ICU  
+ Laboratory  
+ Radiology

THE FUTURE OF  
 VERTICAL MOBILITY



# About Us



At GR VertiQ, we redefine urban mobility. We are a premier provider of advanced elevators and escalators solutions, dedicated to keeping this rapid world moving smoothly, safely, and efficiently. From architectural marvels to residential spaces, we are engineering seamless vertical transport systems that blend cutting-edge technology with elegant design.

we have Supply, installed, and maintained high-performance elevators and escalators for commercial, residential, and industrial sectors.

# Core Strengths



All kinds of passenger elevators



High-speed passenger elevators



Rapid-response service and maintenance team



Eco-friendly public transit escalators

**GR** **VertiQ**  
SOLUTION SARL

# Elevator Ride



## Safe and Reliable Travel.

### Automatic emergency levelling device in case of power failure

When a power off during running, the automatic emergency leveling device can run the car to the nearest level position in a timely manner, so that passengers can safely leave the elevator.

### Permanent magnet synchronous gearless traction machine, Reliable and durable

The power capacity is larger, the temperature rise is better than the national standard.

It provides 2.5 times the rated load braking torque, and a higher transmission efficiency.

The brake is tested by 15 million times.

### Microcomputer control system, Stable operation

The new generation of dual 32-bit control system adopts CANBUS communication, direct docking, distance control and other technologies, ensuring stable operation, safety and reliability.

### Permanent magnet door machine, Rapid and steady

The torque is greater, the efficiency is higher, and the operation stability and sensitivity are better.

The curtain light can make rapid response to any person or object when entering into the detection area.

The door system (door lock+ door machine) has passed 12 million times reliability tests.

### Technology of preventing car's unintended movement, Safe leveling

The precision of car leveling detection can be up to millimeter without mistake, so that the passengers easily get in and out. The reliable car leveling memory technology ensures that the elevator stops in advance and the leveling is safe.


### Security Components, Full Protection

The safety gear adopts symmetrical wedge block to avoid the occurrence of the car shaking while using unilateral wedge braking, and reduce the damage to the guide rail.

Full load and full speed hydraulic buffer with longer service life.

### Car positioning technology, Safe arrival

The abnormal sliding between the wire rope and the traction wheel is effectively eliminated, and the possibility of returning to the home station by accident is reduced to a minimum.

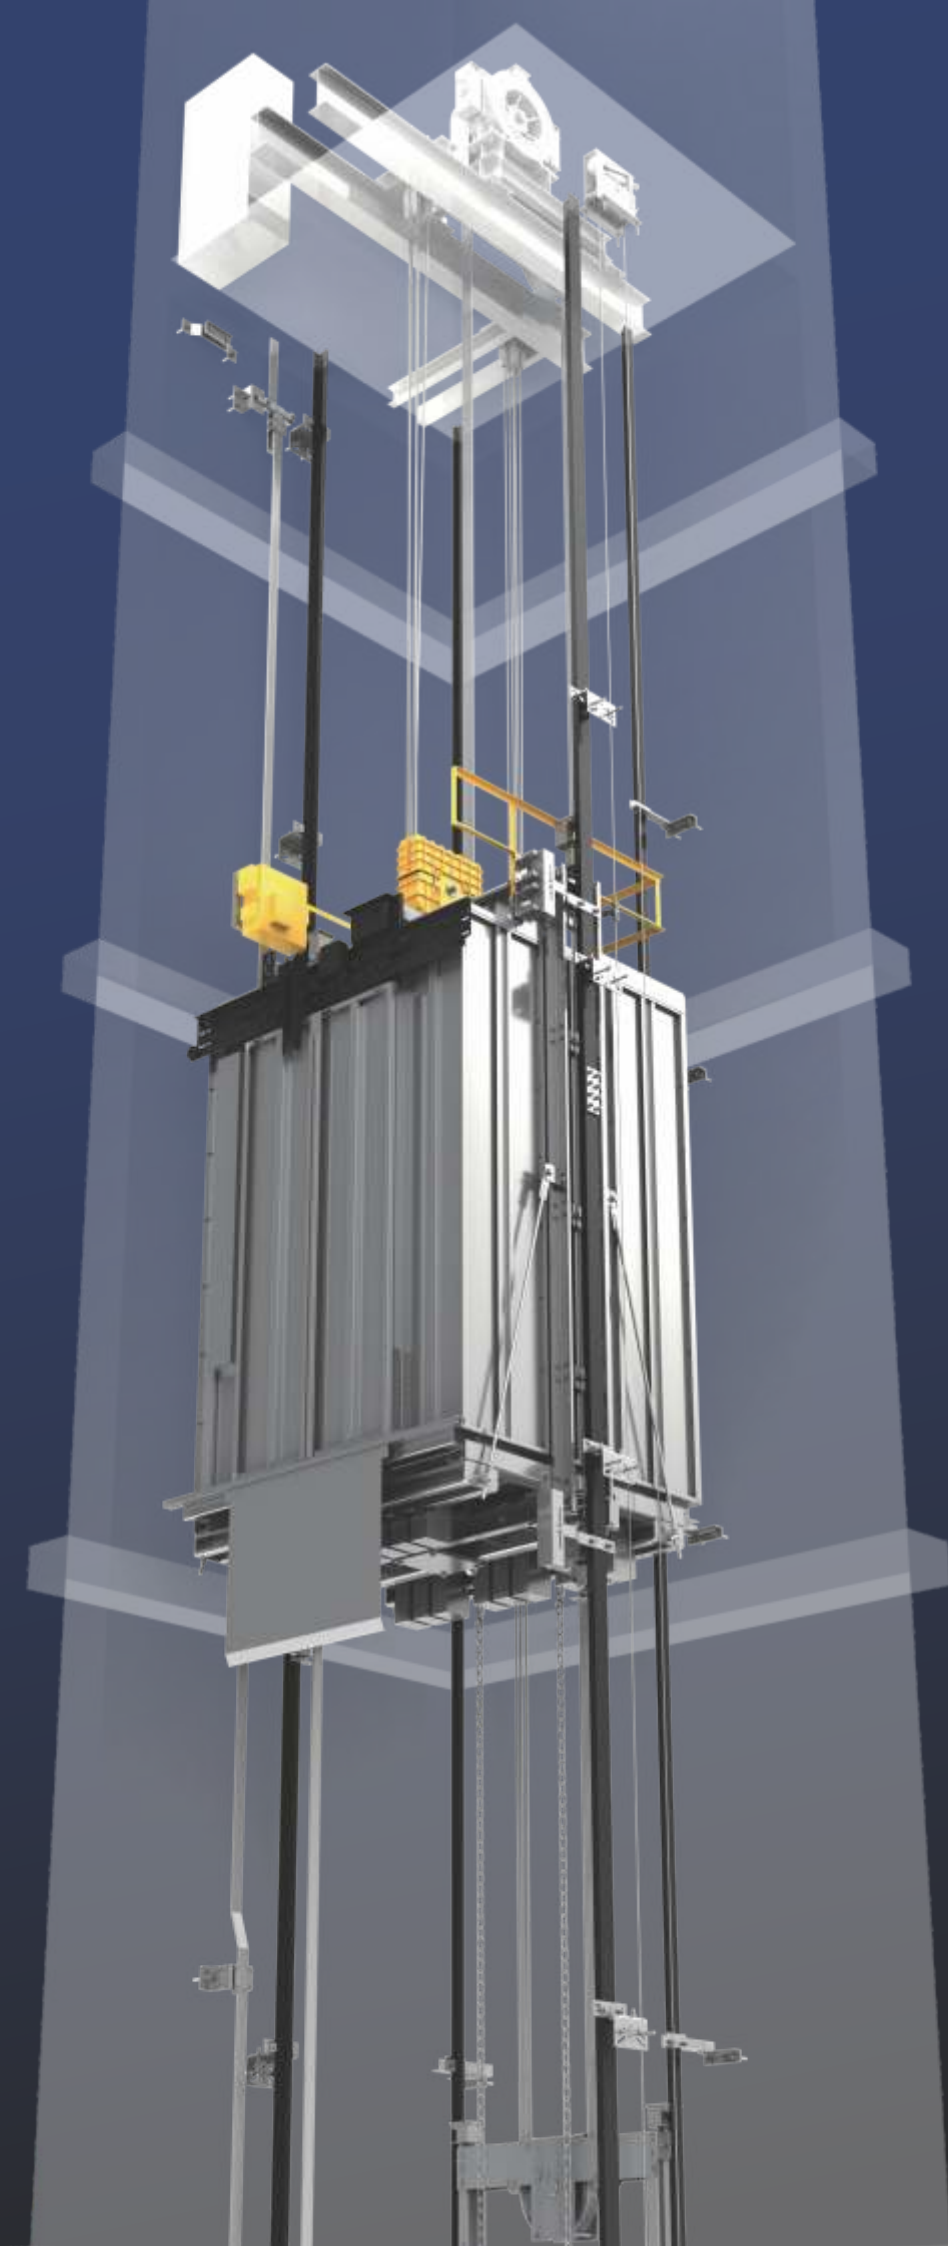



## KL/Y4-001R-2

(Standard)

**Car wall**  
Hairline stainless steel + mirror  
stainless steel

**Car door**  
Hairline stainless steel

**Floor**  
KL/JD-Y001

**Handrail**  
KL-FS 001

**Operation panel**  
KL241CD Integrated operation  
panel



Scan the QR code to know more about  
the lift car in the 360-degree manner

## Ceiling KL/DD-Y001

Hairline stainless steel, polycarbonate  
sheet LED light source



## KL/Y4-002R

(Optional)

**Ceiling**  
KL-D 014 Hairline stainless steel

**Car wall**  
Hairline stainless steel

**Car door**  
Hairline stainless steel

**Floor**  
KL-JD 006

**Operation panel**  
KL231CD Integrated operation panel



Scan the QR code to know more about  
the lift car in the 360-degree manner

# Cabin & Landing Operation Panel

## Wall-mounted Integrated Control Cabinet (Apply to front wall and side wall)



Hospital elevator applies the most concise integrative operation panel in the aspect of the model. It needs no re-installation, is of the natural model, and uses environmental protection materials, is cost-saving, sensitively reactive, and with easy maintenance.

**Panel material**  
mirror stainless steel/Hairline

**Button:**  
Round micro-stroke button

**Display screen**  
Dot matrix/LED segment  
code/Multimedia display screen

**Parking number**  
2-48 parking floors

### Display screen/Button standard



Red dot



KL241CD

Standard

KL231CD



Free optional

### Display screen/Button optional



White dot



KL241-1CD

Charged optional



KL231-1CD

Charged optional



LED section of code



KL243-4CD

Free optional



KL233-4CD

Free optional

### Optional multimedia display screen/buttons (Charged optional)

Optional button



KL235CD KL237CD-A KL239CD



KL245CD KL247CD-A KL249CD

Optional screen size



KL241CD

Standard

There may be differences between the printing color and the real object color. Please refer to the real object.

## Rotary Integrated Control Cabinet (Only for front wall, not side wall)



**Panel material (Mirror stainless steel/Hairline stainless steel )**

**Panel material**  
Mirror stainless steel/Hairline



**Button**  
Round micro-stroke button

**Display screen**  
Dot matrix

**Parking number**  
2-60 parking floors

### Display screen/Button optional



Red dot matrix



KL511CD

Charged optional



White dot matrix



KL511-1CD

Charged optional

### Operation panel for disabled (Charged optional)



**Panel material**  
Hairline stainless steel



KL38ACD



KL38A-1CD

KL511CD

Charged optional

There may be differences between the printing color and the real object color. Please refer to the real object.

# Cabin & Landing Operation Panel

## Calling Indicator Without Bottom Box



**KL1201-3HD**  
Standard  
Dot matrix display



**KL1201-IHD**  
Free optional  
LED segment  
code display



**KL1201-2HD**  
Free optional  
Dot matrix  
display



**KL1213-3HD**  
Charged  
optional  
Dot matrix  
display



**KL1213-IHD**  
Charged  
optional LED  
segment code  
display




**KL1213-2HD**  
Charged  
optional Dot  
matrix display



**KL1213-4HD**  
Charged  
optional Liquid  
code display

Panel material Anti-fingerprint frosted stainless steel

## Floor level indicator



**KL1206-3H**  
Optional white  
dot matrix,  
White segment  
code



**KL34IH**  
Panel material  
(hairline  
stainless steel)




**KL365H**  
Panel material  
(hairline  
stainless steel)

## Fireman switch



**KL1205H**  
Fire box  
Standard



**KL1215H**  
Fire box  
Charged  
optional

There may be differences between the printing color and the real object color. Please refer to the real object.



## Landing Door

- Jamb:**  
It matches with the hoist-way door
- Hoist-way door**  
Hairline stainless steel  
Dusting steel plate
- Sill**  
Hard aluminum

## Handrail (optional)



**KL-FS 001**  
Stainless steel hairline  
mono-tube



**KL-FS 003**  
Stainless steel hairline  
double-tube



**KL-FS 005**  
Stainless steel hairline  
tri-tube



**KL-FS 009**  
Short grain stanless  
steel, arc head

## PVC floor (optional)



**KL-JD 001**



**KL-JD 002**




**KL-JD 004**




**KL-JD 005**




**KL-JD 006**



**KL-JD 010**



**KL/JD-Y001**



**KL/JD-6001**



**KL/JD-4020**

## Dusting color standard (optional)



**KL-SK 001**  
Ice gray




**KL-SK 002**  
Plane gray



**KL-SK 003**  
Corny yellow

# Hospital Elevator (with Machine Room)

## Standard GB/T 7588.1-2020

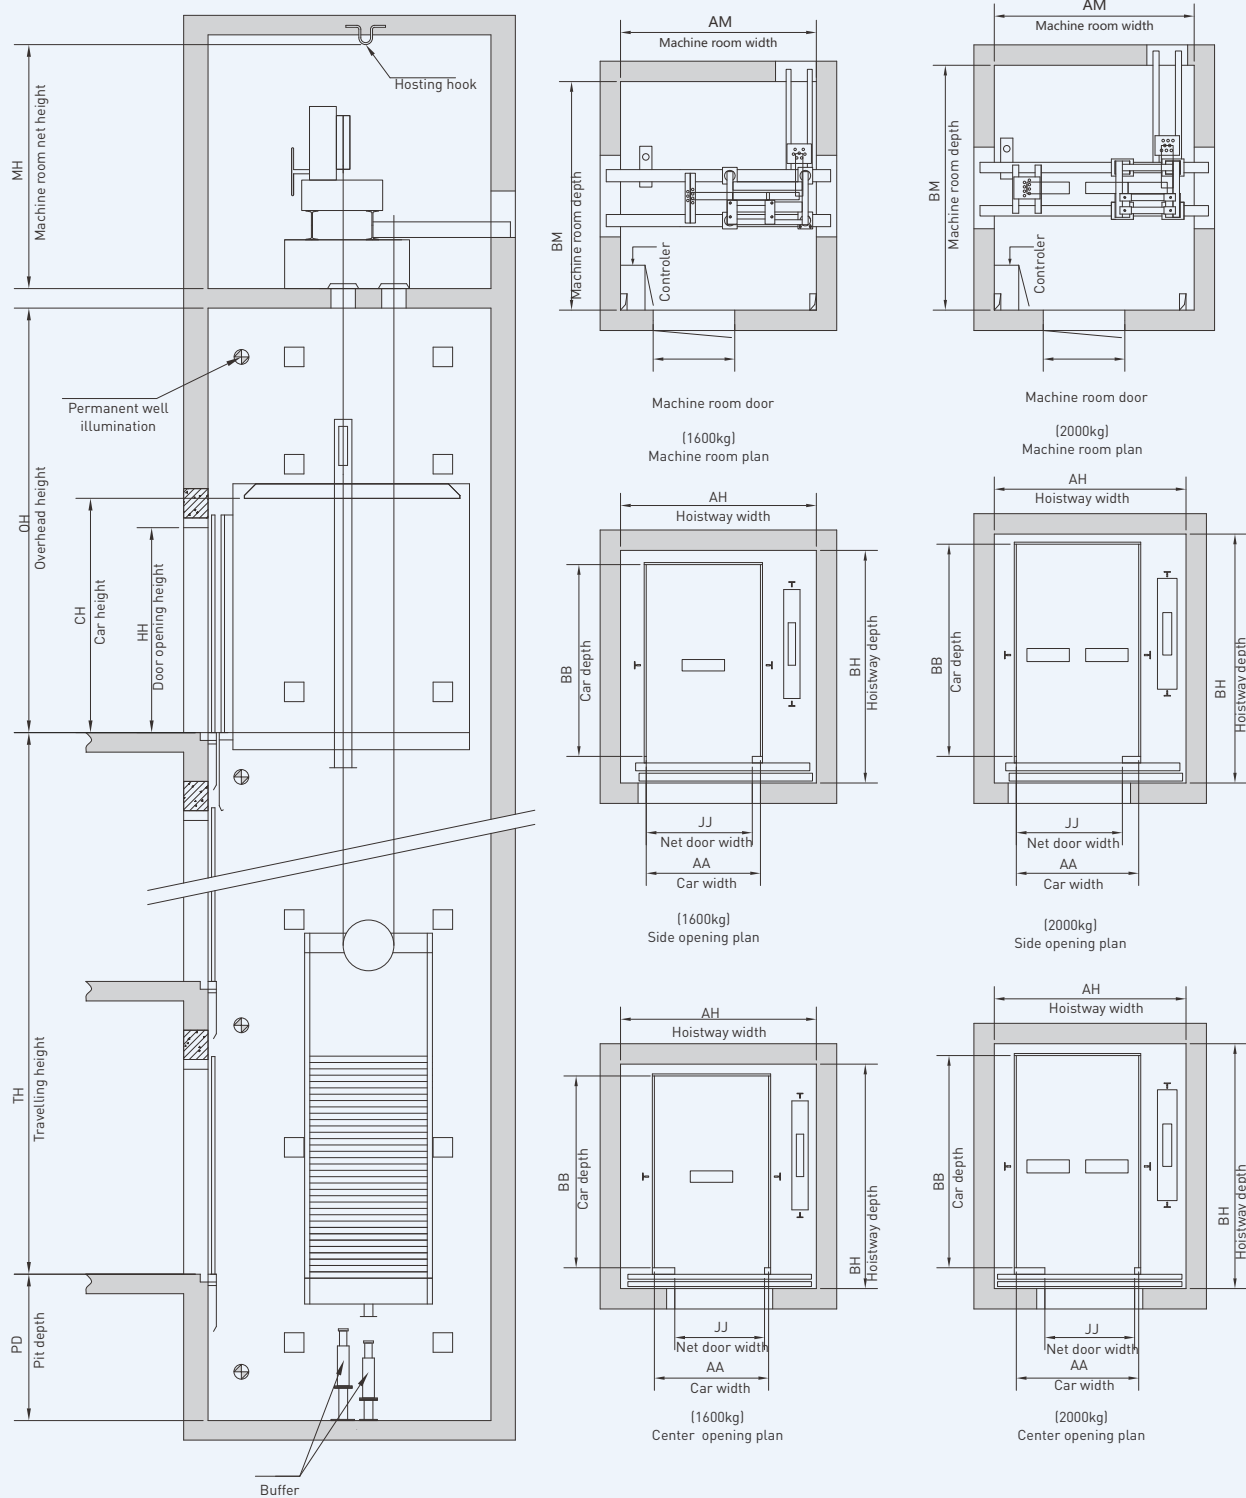


| (Kg)             | (m/s)       | (mm)               | (mm)                | (mm)<br>Car size |       |        | (mm)<br>Hoistway size |       | (mm)<br>Machine room |       | (mm)   | (mm)  | (mtr)                 |
|------------------|-------------|--------------------|---------------------|------------------|-------|--------|-----------------------|-------|----------------------|-------|--------|-------|-----------------------|
| Loading capacity | Rated speed | Door opening width | Door opening height | Width            | Depth | Height | Width                 | Depth | Width                | Depth | Height | Depth | Max.travelling height |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2900  | 2400                 | 2900  | 4100   | 1450  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2900  | 2400                 | 2900  | 4250   | 1550  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2900  | 2400                 | 2900  | 4300   | 1600  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2900  | 2400                 | 2900  | 4400   | 1700  | 120                   |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 3050  | 2400                 | 3050  | 4100   | 1450  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 3050  | 2400                 | 3050  | 4250   | 1550  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 3050  | 2400                 | 3050  | 4300   | 1600  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 3050  | 2400                 | 3050  | 4400   | 1700  | 120                   |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2800  | 2400                 | 2800  | 4100   | 1450  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2800  | 2400                 | 2800  | 4250   | 1550  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2800  | 2400                 | 2800  | 4300   | 1600  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2800  | 2400                 | 2800  | 4400   | 1700  | 120                   |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2910  | 2400                 | 2910  | 4100   | 1450  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2910  | 2400                 | 2910  | 4250   | 1550  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2910  | 2400                 | 2910  | 4300   | 1600  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400  | 2400   | 2400                  | 2910  | 2400                 | 2910  | 4400   | 1700  | 120                   |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3150  | 2450                 | 3150  | 4350   | 1550  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3150  | 2450                 | 3150  | 4500   | 1600  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3150  | 2450                 | 3150  | 4550   | 1650  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3150  | 2450                 | 3150  | 4650   | 1700  | 120                   |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3350  | 2450                 | 3350  | 4350   | 1550  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3350  | 2450                 | 3350  | 4500   | 1600  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3350  | 2450                 | 3350  | 4550   | 1650  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3350  | 2450                 | 3350  | 4650   | 1700  | 120                   |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3100  | 2450                 | 3100  | 4350   | 1550  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3100  | 2450                 | 3100  | 4500   | 1600  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3100  | 2450                 | 3100  | 4550   | 1650  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3100  | 2450                 | 3100  | 4650   | 1700  | 120                   |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3210  | 2450                 | 3210  | 4350   | 1550  | 60                    |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3210  | 2450                 | 3210  | 4500   | 1600  | 80                    |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3210  | 2450                 | 3210  | 4550   | 1650  | 105                   |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700  | 2400   | 2350                  | 3210  | 2450                 | 3210  | 4650   | 1700  | 120                   |

Note: All dimensions are in millimeters (mm).

# Hospital Elevator (Machine Roomless)

Standard: Q/KJ I-10016-2022

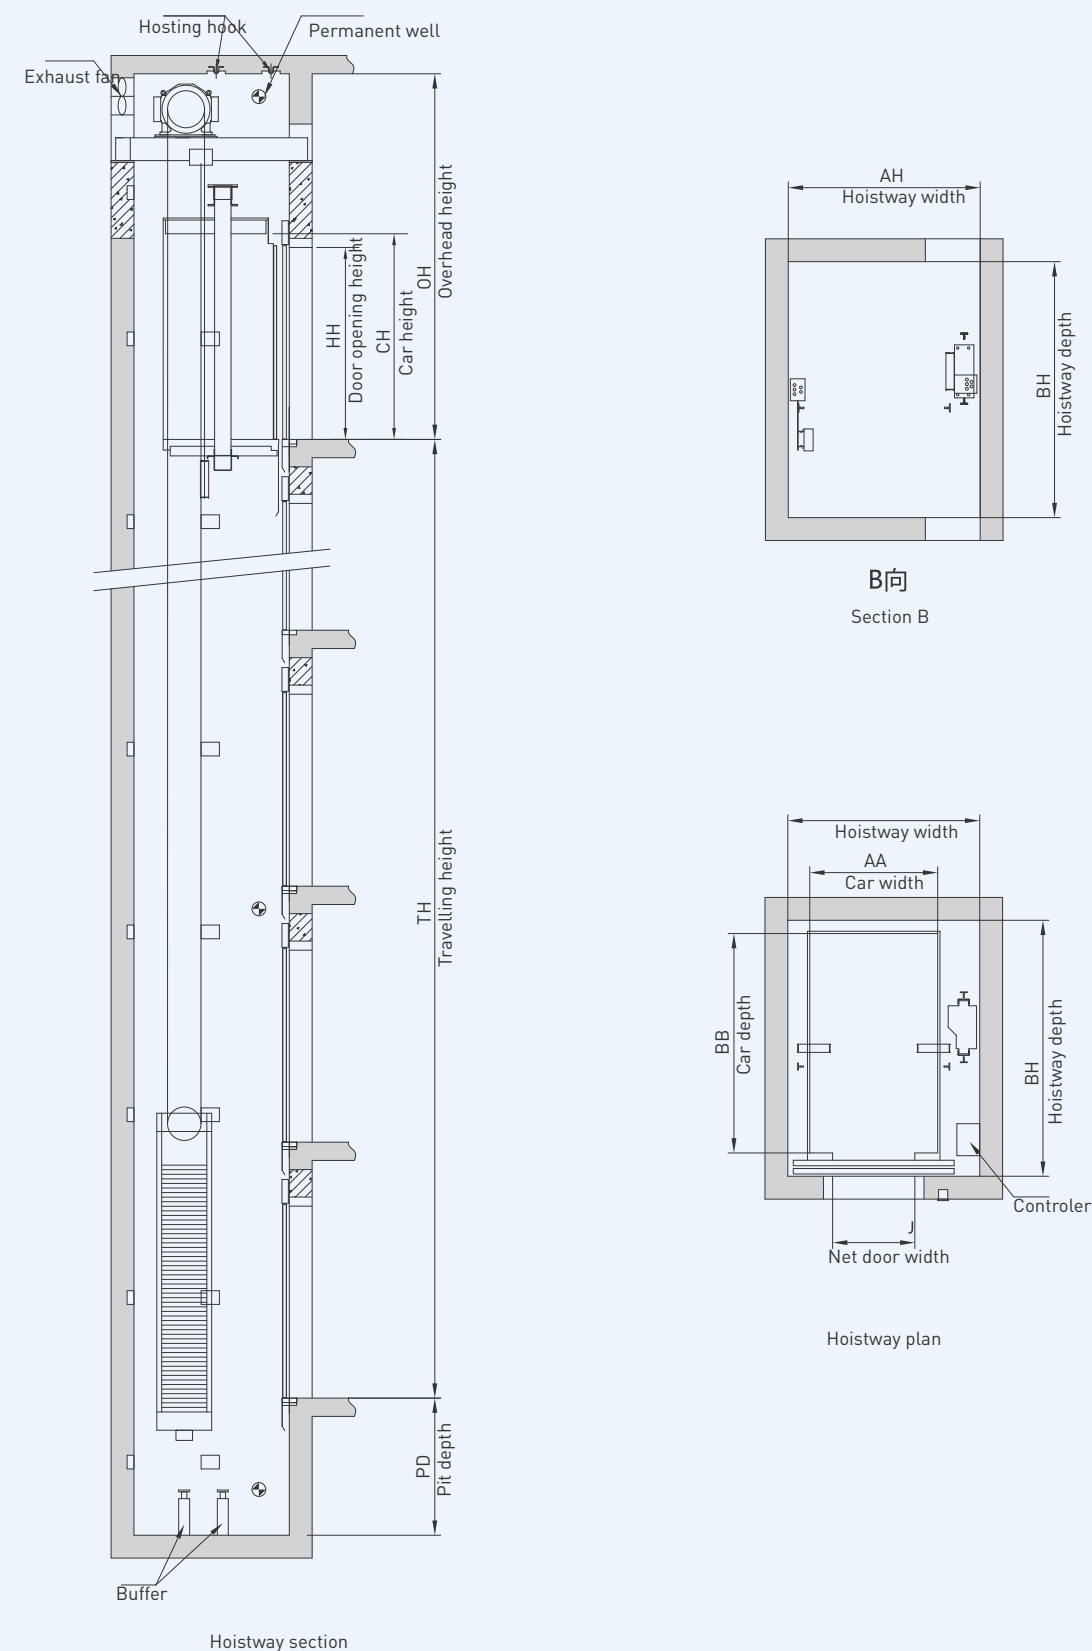

| (Kg)             | (m/s)       | (mm)               | (mm)                | (mm)<br>Car size |      |      | (mm)<br>Hoistway size |      | (mm)             | (mm)      | (mtr)                 |
|------------------|-------------|--------------------|---------------------|------------------|------|------|-----------------------|------|------------------|-----------|-----------------------|
| Loading capacity | Rated speed | Door opening width | Door opening height | Width            |      |      | Width                 |      | Top floor height | Pit depth | Max.travelling height |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 2900 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 2900 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 2900 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 2900 | 4750             | 1700      | 95                    |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 3050 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 3050 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 3050 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2400                  | 3050 | 4750             | 1700      | 95                    |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2800 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2800 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2800 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2800 | 4750             | 1700      | 95                    |
| 1600             | 1.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2910 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2910 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2910 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1400             | 2400 | 2250 | 2450                  | 2910 | 4750             | 1700      | 95                    |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3200 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3200 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3200 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3200 | 4750             | 1700      | 95                    |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3350 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3350 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3350 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3350 | 4750             | 1700      | 95                    |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3100 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3100 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3100 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3100 | 4750             | 1700      | 95                    |
| 2000             | 1.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3210 | 4150/4200        | 1450      | 30/50                 |
|                  | 1.6         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3210 | 4300/4350        | 1550      | 30/60                 |
|                  | 1.75        | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3210 | 4350/4400        | 1600      | 30/80                 |
|                  | 2.0         | 1300               | 2100                | 1500             | 2700 | 2250 | 2450                  | 3210 | 4750             | 1700      | 95                    |

Note: All dimensions are in millimeters (mm).

Standard Functional Feature

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Brake detection protection                        | Brake arm detection switch executes real-time monitor to brake opening / closing. If the brake does not open by the requirements, the system will not start the elevator.                                                                                                                                                                                                                                                                 |
| Protection of none door opening outside door zone | Automatic door opening is forbidden under none door zone condition.                                                                                                                                                                                                                                                                                                                                                                       |
| Low-speed protection                              | It prevents elevator from low-speed running outside the control range causing any safety problem(s).                                                                                                                                                                                                                                                                                                                                      |
| Prompt of overload alarm                          | Before the elevator shuts the door, if it detects overload signal, the elevator doors keep opening and overload buzzer rings and overload light is on. After it removes overload problem, it re-starts automatically.                                                                                                                                                                                                                     |
| Automatic parking in trouble                      | When the elevator stops in none leveling zone due to any trouble, if it is not caused by safety device action, it executes self-rescue running towards the middle floor direction at low speed. It parks and opens the door at the nearest service floor to prevent from any trapping accident.                                                                                                                                           |
| Overspeed protection                              | With the star-delta brake function, the elevator system can limit the speed well even in case of forced brake releasing.                                                                                                                                                                                                                                                                                                                  |
| Unintended car movement protection (UCMP)         | When the landing door isn't locked and the car door isn't closed, the elevator is equipped with a device which can stop unintended movements of the car leaving the landing caused by any failed part of the traction machine or drive control system for the safe operation of the car.                                                                                                                                                  |
| Checking the short circuit of door locks          | It will check whether the landing door lock or car door lock has a short circuit every time when the elevator stops at a landing and opens the door. If any, the elevator will report the failure and stop until the failure is removed.                                                                                                                                                                                                  |
| Fire-fighting return                              | When the fire-fighting switch closes, the system enters into fire-fighting return. The system will remove all the landing calls and car command signals, and it automatically returns to fire-fighting home landing, and the door keeps open. If the elevator is operating in reverse direction, it will stop at the nearest storey but won't open the door, then back to fire station and no longer running, the door will keep opening. |
| Home landing elevator locking                     | When the elevator is under automatic condition, when it shuts home landing locking switch, the elevator will complete all the registered car command services, automatically return to home landing, it enters into parking condition. As soon as locking switch is on, it immediately returns from parking condition and goes into normal running.                                                                                       |
| Cancellation of the error register                | If the passenger presses the car command button at certain floor and has registered it by mistake, (by then the car indicating lamp is bright), if under the condition of none elevator running, the passenger only double-click the car command button at the same floor to cancel the register. (By then the car indicating lamp out.)                                                                                                  |
| Automatic correction of floor signal              | If the floor display position has error, after the system detects terminal switch in the travel, it will automatically correct the floor display.                                                                                                                                                                                                                                                                                         |
| Cancellation of the reverse command(s) in the car | When the elevator travels to the farthest floor and changes the speed, it removes all the car command register.                                                                                                                                                                                                                                                                                                                           |
| Self-diagnostic embedded call button              | If on certain storey, the call button was pressed over certain time but not disconnected, the system assumes that it is embedded button. It does not register the landing call of the same floor afterwards. Responsive lamp which corresponds to the button keeps flickering for alarming. When the button disconnects, it exits from above condition.                                                                                   |
| Re-leveling function                              | If the elevator parks on the current floor, when too many passengers enter into / leave the elevator, the car is separated from the leveling zone because of wire rope extension or shortening. The elevator will then travel to the leveling position at low speed under the condition of door-opening.                                                                                                                                  |

Healthy Elevator Ride (Optional)


Car UV Disinfection




After the elevator has been unused for a certain period of time, it communicates and controls with the elevator to automatically light up the ultraviolet lamp for disinfection and sterilization. Ultraviolet rays can disinfect and sterilize various common pathogenic bacteria, with a sterilization rate of more than 99%, providing passengers with a safe and clean elevator environment.



Negative Ion Fresh Air System



Automatically releasing negative ions, adsorbing small dust particles, oxidizing foreign objects in the air, purifying the air, and caring for human health.

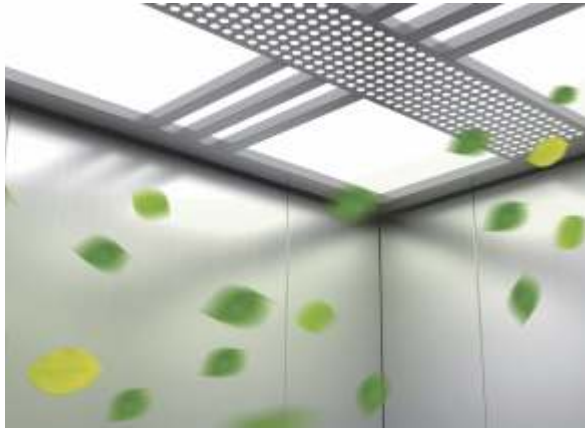

Car Air Purifier



Automatic dust removal and sterilization, clean and pollution-free, keeping the air inside the elevator car clean and hygienic at all times. The automatic operation time can be set, which is energy-saving and environmentally friendly.





📍 Cité Mourtada 2 Sipres Bande,  
verte lot 104, VDN, Dakar 25000,  
Senegal, West Africa.

✉ [marketing@grvertiq.com](mailto:marketing@grvertiq.com)

🌐 [www.grvertiq.com](http://www.grvertiq.com)

☎ +221 711 200 277