

GR  **VertiQ**
SOLUTION SARL



THE FUTURE OF
 **VERTICAL MOBILITY**



About Us



At GR VertiQ, we redefine urban mobility. We are a premier provider of advanced elevators and escalators solutions, dedicated to keeping this rapid world moving smoothly, safely, and efficiently. From architectural marvels to residential spaces, we are engineering seamless vertical transport systems that blend cutting-edge technology with elegant design.

we have Supply, installed, and maintained high-performance elevators and escalators for commercial, residential, and industrial sectors.

Core Strengths



All kinds of passenger elevators



High-speed passenger elevators



Rapid-response service and maintenance team



Eco-friendly public transit escalators

GR VertiQ
SOLUTION SARL

Elevator Ride



Safe and Reliable Travel.

Automatic emergency levelling device in case of power failure

When a power off during running, the automatic emergency leveling device can run the car to the nearest level position in a timely manner, so that passengers can safely leave the elevator.

Permanent magnet synchronous gearless traction machine, Reliable and durable

The power capacity is larger, the temperature rise is better than the national standard.

It provides 2.5 times the rated load braking torque, and a higher transmission efficiency.

The brake is tested by 15 million times.

Microcomputer control system, Stable operation

The new generation of dual 32-bit control system adopts CANBUS communication, direct docking, distance control and other technologies, ensuring stable operation, safety and reliability.

Permanent magnet door machine, Rapid and steady

The torque is greater, the efficiency is higher, and the operation stability and sensitivity are better.

The curtain light can make rapid response to any person or object when entering into the detection area.

The door system (door lock+ door machine) has passed 12 million times reliability tests.

Technology of preventing car's unintended movement, Safe leveling

The precision of car leveling detection can be up to millimeter without mistake, so that the passengers easily get in and out. The reliable car leveling memory technology ensures that the elevator stops in advance and the leveling is safe.


Security Components, Full Protection

The safety gear adopts symmetrical wedge block to avoid the occurrence of the car shaking while using unilateral wedge braking, and reduce the damage to the guide rail.

Full load and full speed hydraulic buffer with longer service life.

Car positioning technology, Safe arrival

The abnormal sliding between the wire rope and the traction wheel is effectively eliminated, and the possibility of returning to the home station by accident is reduced to a minimum.

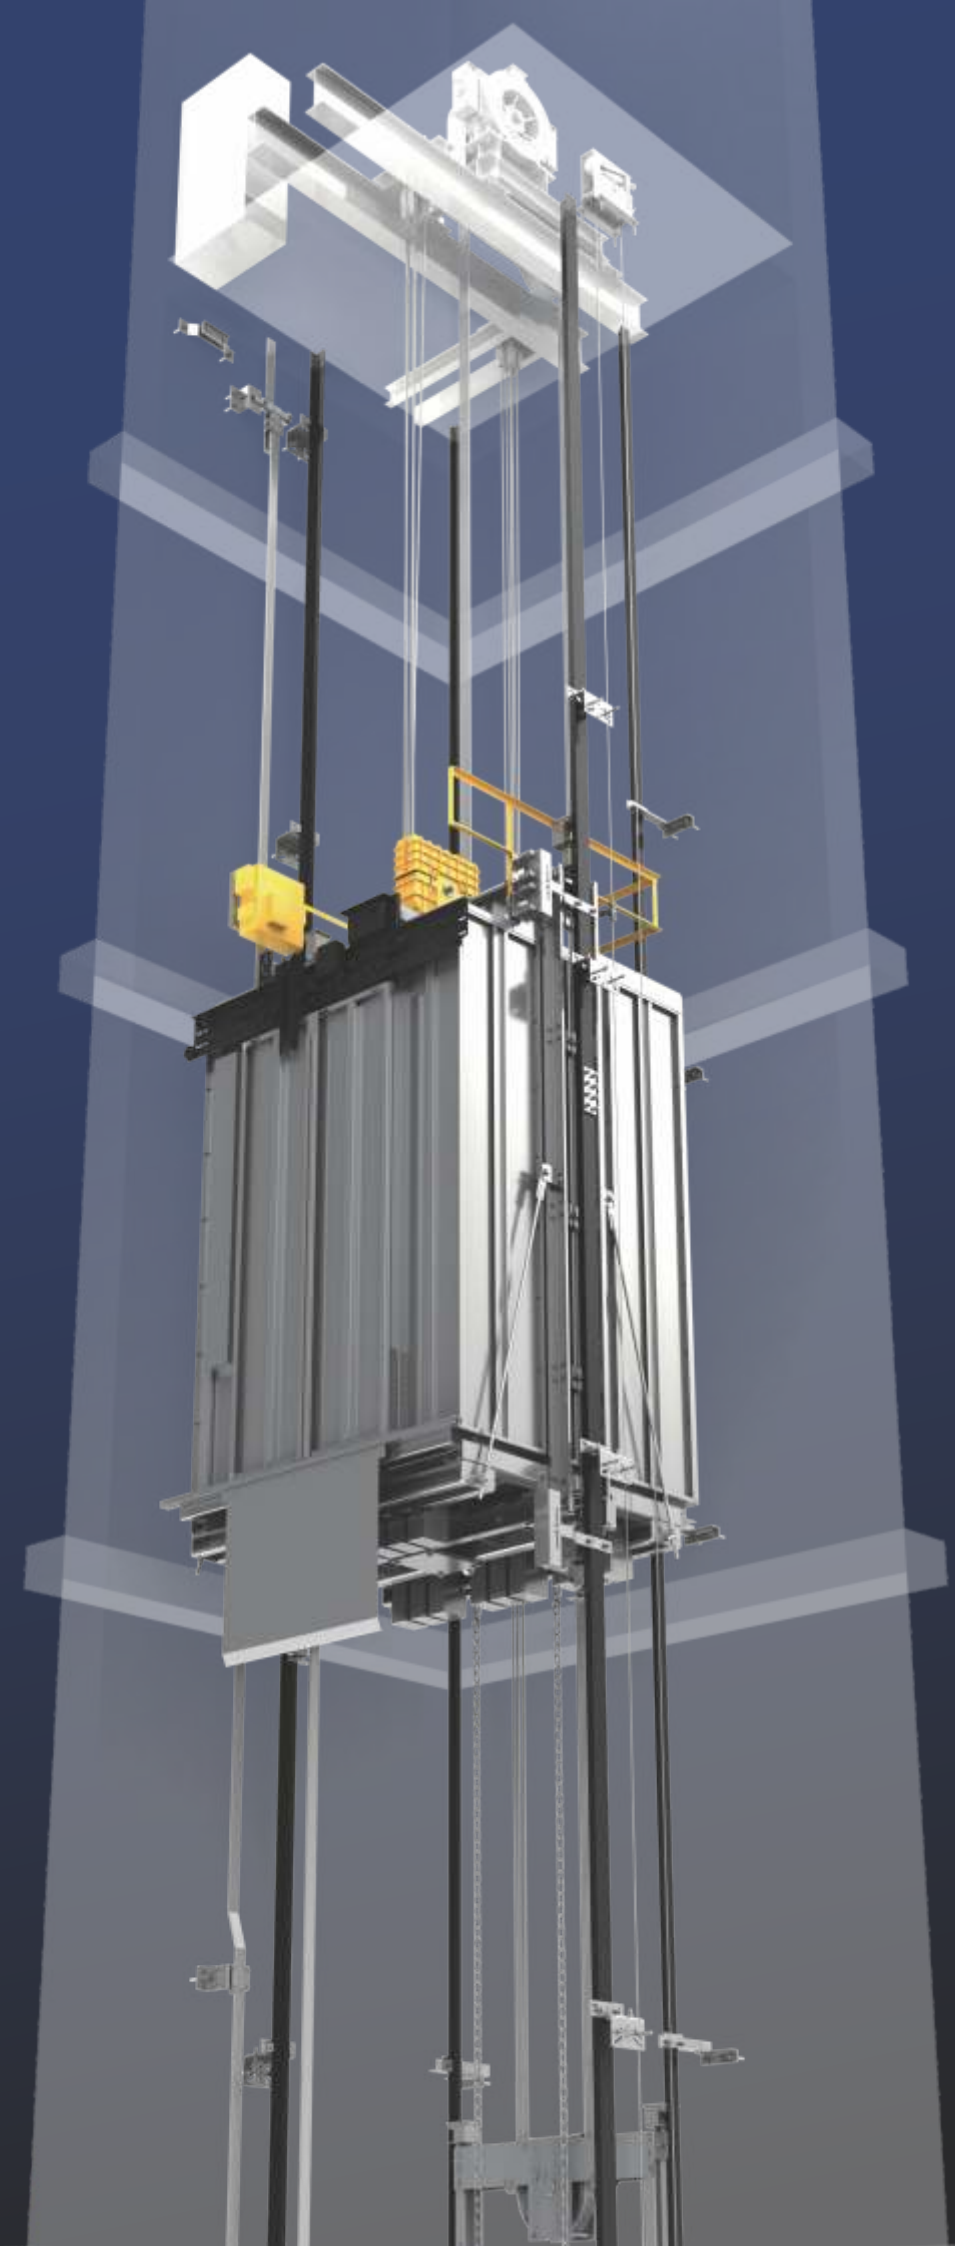

User-Friendly Design

Create an exclusive space and showcase extraordinary style

Not just an elevator, but also an extension of spatial aesthetics.

We provides you with a variety of decoration solutions to meet the actual needs of different projects, thereby achieving a perfect integration with the overall beauty of architecture and adding a unique style to your space.

KL/K7- 1006RB-5

Standard configuration

Integrated ceiling

KL/DD-300 original color hair patterns, spotlights, panel lights

Car wall/Front wall

Hairline stainless steel

Operation panel (≤ 30 floors)

KL1143-4C hairline stainless steel

Operation panel (≤ 30 floors)

KL513-4C rotary integrated operation panel, hairline stainless steel

Floor

KL/JD-6001(PVC)

Car door

Hairline stainless steel



Scan the QR code to know more about the lift car in the 360-degree manner



Ceiling KL/DD-300

Integrated ceiling

Standard(Apply to embedded operation panel, rotary integrated operation panel)

Primary hairline, Spot lamp, panel lights



This integrated ceiling does not match the wall-mounted integrated operational box air conditioner cannot be matched

Ceiling KL/DD-1005

Split type suspended ceiling

Standard(only apply to when the deep cabin with side counterweight, floor numbers > 30 and wall-mounted integrated operation box)

LED : Hairline stainless steel, LED lighting



There may be differences between the printing color and the real object color. Please refer to the real object.

Luxury Cabin Option



KL/K2-5001

Charged optional

- Ceiling**
KL/DD-2501, Primary color hairline stainless steel, LED lighting
- Rear wall**
Original color mirror stainless steel+color-coated steel plate (metal brushed HSL007, black brushed)
- Side wall**
Color-coated steel plate (metal brushed HSL007, black brushed)
- Front Wall**
Original Color Hairline Stainless Steel
- Floor**
KL/JD-2501 PVC
- Car door**
Original color hairline stainless steel
Note: only applicable to when the operation box in front wall



Scan the QR code to know more about the lift car in the 360-degree manner

There may be differences between the printing color and the real object color. Please refer to the real object.

KL/K2-5002

Charged optional

- Ceiling**
KL/DD-2502, Primary color hairline pattern stainless steel, LED lighting
- Rear wall**
Original color mirror stainless steel+color-coated steel plate (wood grain HSM016, Saint Gore yellow oak)
- Side wall**
Original color mirror stainless steel+color-coated steel plate (wood grain HSM016, Saint Gore yellow oak)
- Front Wall**
Apple sand anti fingerprint stainless steel
- Floor**
KL/JD-2501 (PVC)
- Car door**
Apple sand anti fingerprint stainless steel
Note: only applicable to when the operation box in front wall



Scan the QR code to know more about the lift car in the 360-degree manner



KL/Smart 3

Charged optional

- Ceiling**
KL/DD-YHS3, seamless white spray painted ceiling, LED lighting
- Rear wall**
Original color mirror stainless steel+light wood grain coated steel plate
- Side wall**
Original color mirror stainless
- Front Wall**
Apple sand anti fingerprint stainless steel
- Floor**
KL/JD-YHS3 (imitation stone pattern PVC)
- Car door**
Apple sand anti fingerprint stainless steel
Note: only applicable to when the operation box in front wall



San the QR code to know more about the lift car in the 360-degree manner

There may be differences between the printing color and the real object color. Please refer to the real object.

KL/Smart 5

Charged optional

- Ceiling**
KL/DD-YHS5, natural color apple sand stainless steel+rose gold apple sand stainless steel frame, white spray coating, LED lighting
- Rear wall**
Apple sand anti fingerprint stainless steel+light wood grain coated steel plate, hidden light strip
- Side wall**
Apple sand anti fingerprint stainless steel+light wood grain coated steel plate
- Front Wall**
Original color mirror stainless steel
- Floor**
KL/JD-YHS5 (imitation stone pattern PVC)
- Car door**
Mirror stainless steel
Note: only applicable to when the operation box in front wall



San the QR code to know more about the lift car in the 360-degree manner



Luxury Cabin Option



KL/K2-400I

Charged optional

- Integrated ceiling(Ⅲ type)**
KL/DD-300, primary hair stripe, downlight, panel light (only applicable to Q/KLJ 1-10016-2022 standard products, Air conditioning cannot be configured)
- Car wall**
Steel plate film (EW647), mirror
- Stainless steel front wall**
Hairline stainless steel
- Handrail**
Stainless steel round tube (KL-FS 001)
- Floor**
KL/JD-2401 (PVC)
- Car door**
Hairline stainless steel

Note: only applicable to when the operation box in front wall



Scan the QR code to know more about the lift car in the 360-degree manner

There may be differences between the printing color and the real object color. Please refer to the real object.

KL/K8-1009

Charged optional

- Integrated ceiling (II type)**
KL/DD-1009, dusting steel plate (RAL7047), LED lighting (Only applicable to Q ≤ 1050kg)
- Car wall**
Hairline stainless steel
- Front Wall**
Hairline stainless steel
- Floor**
KL/JD-1004 (PVC)
- Car door**
Hairline stainless steel

Note: only applicable to when the operation box in front wall



San the QR code to know more about the lift car in the 360-degree manner



KL/K7-1008R

Charged optional

- Ceiling**
KL/DD-4003
- Car wall**
The back wall and middle side wall are etched by mirror surface, others are hairline
- Stainless steel front wall**
Hairline stainless steel
- Operation panel**
KL513-4C rotary integrated operation panel, Hairline stainless steel
- Floor**
KL/JD-4003 (PVC)
- Car door**
Hairline stainless steel

Note: only applicable to when the operation box in front wall



San the QR code to know more about the lift car in the 360-degree manner

There may be differences between the printing color and the real object color. Please refer to the real object.

KL/K4-1002R

Charged optional

- Ceiling**
KL/DD-4002, Dusting steel plate, square grid in the middle, LED light source
- Car wall**
Coated steel plate (Middle), Coated steel plate (Both side)
- Front wall**
Hairline stainless steel
- Operation panel**
KL513-4C rotary integrated operation panel, hairline stainless steel
- Floor**
KL/JD-4002 (PVC)
- Car door**
Hairline stainless steel

Note: only applicable to when the operation box in front wall



San the QR code to know more about the lift car in the 360-degree manner



Cabin & Landing Operation Panel

Embedded Operation Panel



Panel material
Stainless steel panel, slim type

Button
Standard front loading button

Display screen:
White segment code display/
white dot matrix display

Number of stops
2-30 stops

KLII43-4C **KLII43-4C(pro)**

Standard configuration Charged optional

Display screen



KLII4-IC **KLII4-IC(pro)**
Charged optional Charged optional



Hairline stainless steel



Mirror stainless steel

There may be differences between the printing color and the real object color. Please refer to the real object.

Calling Indicator Without BottomBox



KI86I-IH **KI863-IH** **KL86I-IH(Pro)** **KL863-IH(Pro)**
Standard configuration Charged optional Charged optional Charged optional



KI862-IH **KI864-IH** **KL862-IH(Pro)** **KL864-IH(Pro)**
Charged optional Charged optional Charged optional Charged optional
Touch button Touch button Touch button Touch button

Fire Box



KL8II-IH **KL8I3-IH** **KL865H**
Free optional Charged optional Standard configuration

Rotary Integrated Operation Panel (Only for front wall, not for side wall)



Panel material(please select)
Hairline/mirror stainless steel

Button
Round micro-stroke button

Display screen
LED segment code/ dot matrix

Parking number
2-60 parking floors

Display screen



White dot matrix KL54I-IC
Charged optional

KL543-4C
Charged optional

Wall-mounted Integrated Operation Panel (Suitable for front and side walls)



Panel material (please select):
Hairline/mirror stainless steel

Button:
Round micro-stroke button

Display screen:
LED segment code/ dot matrix

Parking number:
2-48 parking floors

Display screen



White dot matrix KLII5I-IC
Charged optional

KLII53-4C
Charged optional

Operation Panel for Disabled



KL38ACD
Charged optional
Panel material
Hairline stainless steel

Handrail(Optional)



KL/FS-00I
Stainless steel hairline mono-tube



KL/FS-003
Stainless steel hairline double-tube



KL/FS-005
Stainless steel hairline tri-tube



KL/FS-009
Short gain stainless steel arc head

Floor




KL/JD-600I



KL/JD-6002







KL/JD-6003



KL/JD-6004

PVC flooring uses top-grade (wear-resistant grade:T grade) wear-resistant layer raw materials

Passenger Elevator (with Machine Room)

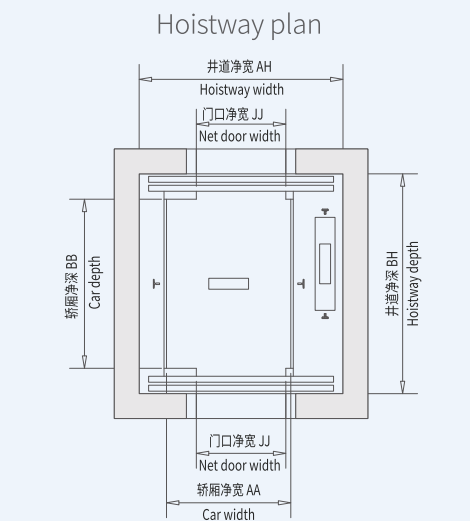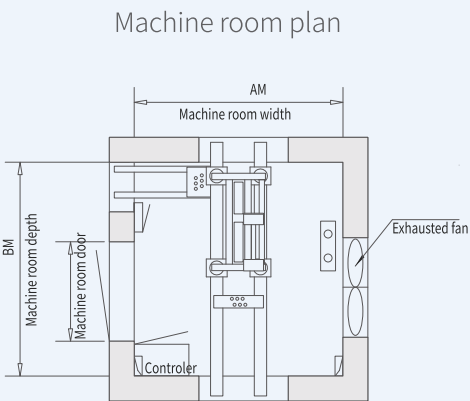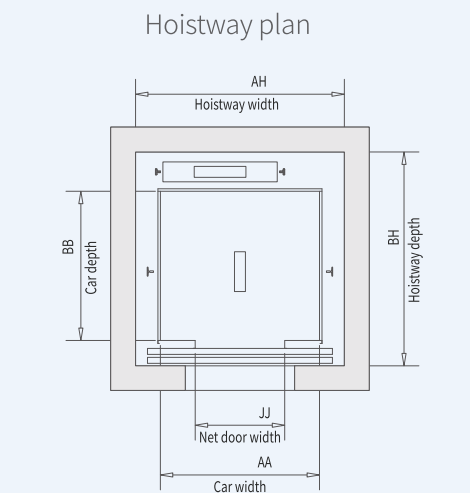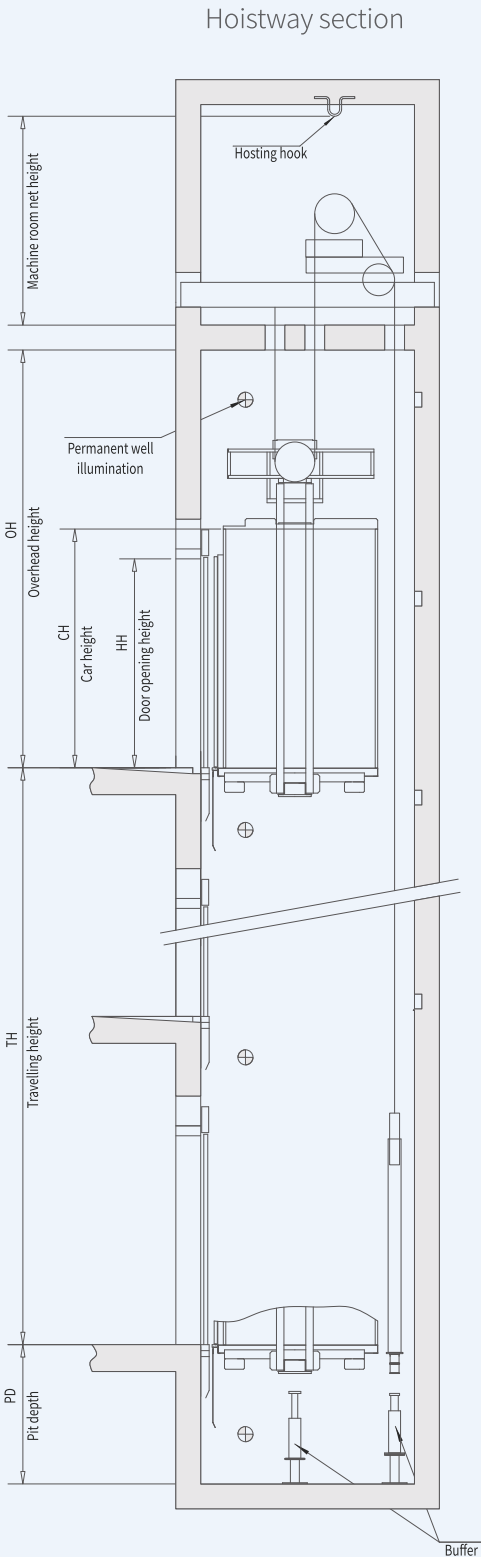

Standard : Q/KJ I-10016-2022

Same Side Door Opening

CAPACITY (KG)	SPEED MTR/S	CW (AA)	CD (BB)	CH	DW (JJ)	DH (HH)	HW (AH)	HD (BH)	MRW (AM)	MRD (BM)	OH			PD	TH (MTR)
630	1.0	1400	1100	2300	800	2100	1900	1750	1900	1750	3800	3850	3900	1300	50
	1.6										3950	4000	4050	1350	60
	1.75										4000	4050	4100	1400	80
800	1.0	1400	1350	2400	800	2100	1900	2000	1900	2000	3900	3950	4000	1300	50
	1.6										4050	4100	4150	1350	60
	1.75										4100	4150	4200	1400	80
	2.0										4300	4350	4400	1450	105
1000	1.0	1600	1400	2400	900	2100	2100	2050	2100	2050	3900	3950	4000	1300	50
	1.6										4050	4100	4150	1350	60
	1.75										4100	4150	4200	1400	80
	2.0										4300	4350	4400	1450	105
1050	1.0	1600	1500	2400	900	2100	2100	2150	2100	2150	3900	3950	4000	1300	50
	1.6										4050	4100	4150	1350	60
	1.75										4100	4150	4200	1400	80
	2.0										4300	4350	4400	1450	105


Standard : Q/KJ I-10016-2022

Both Side Door Opening

CAPACITY (KG)	SPEED MTR/S	CW (AA)	CD (BB)	CH	DW (JJ)	DH (HH)	HW (AH)	HD (BH)	MRW (AM)	MRD (BM)	OH			PD	TH (MTR)
800	1.0	1100	1700	2400	800	2100	1900	2100[2210]	1900	2100[2210]	3900	3950	4000	1300	50
	1.6										4050	4100	4150	1350	60
	1.75										4100	4150	4200	1400	80
	2.0										4300	4350	4400	1450	150
1000	1.0	1250/1100	1850/2000	2400	900	2100	2050	2250/2400 [2360/2510]	2050	2250/2400 [2360/2510]	3900	3950	4000	1300	50
	1.6										4050	4100	4150	1350	60
	1.75										4100	4150	4200	1400	80
	2.0										4300	4350	4400	1450	105
1050	1.0	1250	1950	2400	900	2100	2050	2350/2500 [2460/2610]	2050	2350/2500 [2460/2610]	3900	3950	4000	1300	50
	1.6										4050	4100	4150	1350	60
	1.75										4100	4150	4200	1400	80
	2.0										4300	4350	4400	1450	105

Note: All dimensions are in millimeters (mm).

Passenger Elevator (Machine Roomless)

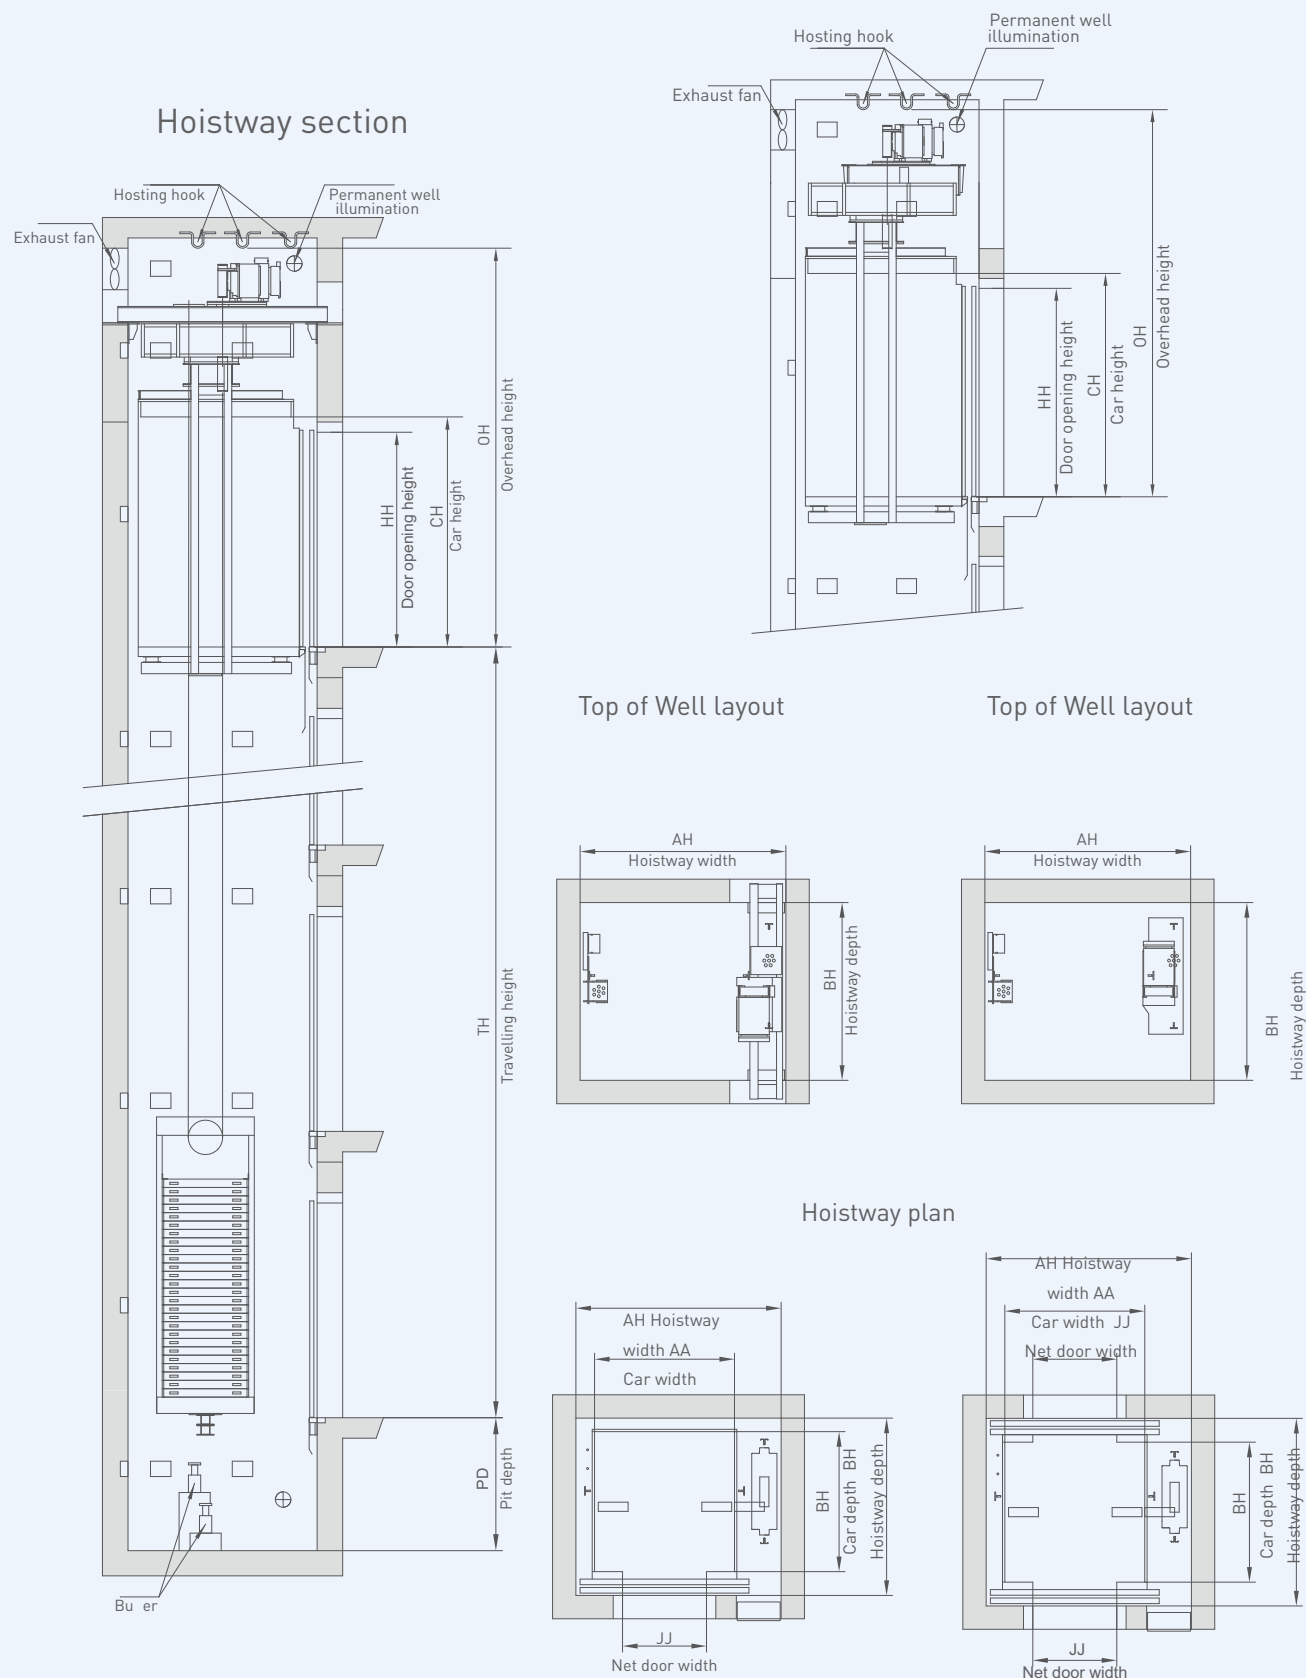

(kg)	(m/s)	JJ(mm)	HH(mm)	(mm) Car size			(mm) Hoistway size			(mm) Top floor height		(mm)	(mtr)
Loading capacity	Rated speed	Door opening width	Door opening height	Width	Depth	Height	Width	Depth				Pit depth	Max travelling height
450	1.0	800	2100	1100	1100	2400	1800	1600	/	4350	4450	1300	30[30] 50[50]
	1.6	800	2100	1100	1100	2400	1800	1600	/	4500	4600	1350	30[30] 60[60]
630	1.0	800	2100	1100	1400	2400	1800	1800	1910	4350	4450	1300	30[30] 50[50]
	1.6	800	2100	1100	1400	2400	1800	1800	1910	4500	4600	1350	30[30] 60[60]
	1.75	800	2100	1100	1400	2400	1800	1800	1910	4550	4650	1400	30[30] 75[60]
	1.0	800	2100	1300	1400	2400	2000	1800	1910	4350	4450	1300	30[30] 50[50]
800	1.6	800	2100	1300	1400	2400	2000	1800	1910	4500	4600	1350	30[30] 60[60]
	1.75	800	2100	1300	1400	2400	2000	1800	1910	4550	4650	1400	30[30] 75[60]
	1.0	800	2100	1100	1400	2400	1800	1800	1910	4350	4450	1300	30[30] 50[50]
1000	1.6	800	2100	1100	1400	2400	1800	1800	1910	4500	4600	1350	20[20] 60[60]
	1.75	800	2100	1100	1400	2400	1800	1800	1910	4550	4650	1400	20[20] 75[60]
1050	1.0	800	2100	1100	1400	2400	1800	1800	1910	4350	4450	1300	30[30] 50[50]
	1.6	800	2100	1100	1400	2400	1800	1800	1910	4500	4600	1350	20[20] 60[60]
	1.75	800	2100	1100	1400	2400	1800	1800	1910	4550	4650	1400	20[20] 75[60]
1000	1.0	800	2100	1100	1400	2400	1800	1800	1910	4350	4450	1300	30[30] 50[50]
	1.6	800	2100	1100	1400	2400	1800	1800	1910	4500	4600	1350	20[20] 60[60]
	1.75	800	2100	1100	1400	2400	1800	1800	1910	4550	4650	1400	20[20] 75[60]
1050	1.0	800	2100	1100	1400	2400	1800	1800	1910	4350	4450	1300	30[30] 50[50]
	1.6	800	2100	1100	1400	2400	1800	1800	1910	4500	4600	1350	20[20] 60[60]
	1.75	800	2100	1100	1400	2400	1800	1800	1910	4550	4650	1400	20[20] 75[60]
1150	1.0	800	2100	1100	1400	2400	1800	1800	1910	4350	4450	1300	50
	1.6	800	2100	1100	1400	2400	1800	1800	1910	4500	4600	1350	60
	1.75	800	2100	1100	1400	2400	1800	1800	1910	4550	4650	1400	80
1250	1.0	1000	2100	1700	1500	2400	2550	1950	/	4300	4450	1450	50
	1.6	1000	2100	1700	1500	2400	2550	1950	/	4450	4600	1550	60
	1.75	1000	2100	17010	1500	2400	2550	1950	/	4500	4650	1600	80
1350	1.0	1000	2100	1800	1500	2400	2650	1950	/	4300	4450	1450	50
	1.6	1000	2100	1800	1500	2400	2650	1950	/	4450	4600	1550	60
	1.75	1000	2100	1800	1500	2400	2650	1950	/	4500	4650	1600	80
1600	1.0	1100	2100	1950	1500	2400	2800	1950	/	4300	4450	1450	50
	1.6	1100	2100	1950	1500	2400	2800	1950	/	4450	4600	1550	60
	1.75	1100	2100	1950	1500	2400	2800	1950	/	4500	4650	1600	80

Note: All dimensions are in millimeters (mm).

Standard Functional Feature

Brake detection protection	Brake arm detection switch executes real-time monitor to brake opening / closing. If the brake does not open by the requirements, the system will not start the elevator.
Protection of none door opening outside door zone	Automatic door opening is forbidden under none door zone condition.
Low-speed protection	It prevents elevator from low-speed running outside the control range causing any safety problem(s).
Prompt of overload alarm	Before the elevator shuts the door, if it detects overload signal, the elevator doors keep opening and overload buzzer rings and overload light is on. After it removes overload problem, it re-starts automatically.
Automatic parking in trouble	When the elevator stops in none leveling zone due to any trouble, if it is not caused by safety device action, it executes self-rescue running towards the middle floor direction at low speed. It parks and opens the door at the nearest service floor to prevent from any trapping accident.
Overspeed protection	With the star-delta brake function, the elevator system can limit the speed well even in case of forced brake releasing.
Unintended car movement protection (UCMP)	When the landing door isn't locked and the car door isn't closed, the elevator is equipped with a device which can stop unintended movements of the car leaving the landing caused by any failed part of the traction machine or drive control system for the safe operation of the car.
Checking the short circuit of door locks	It will check whether the landing door lock or car door lock has a short circuit every time when the elevator stops at a landing and opens the door. If any, the elevator will report the failure and stop until the failure is removed.
Fire-fighting return	When the fire-fighting switch closes, the system enters into fire-fighting return. The system will remove all the landing calls and car command signals, and it automatically returns to fire-fighting home landing, and the door keeps open. If the elevator is operating in reverse direction, it will stop at the nearest storey but won't open the door, then back to fire station and no longer running, the door will keep opening.
Home landing elevator locking	When the elevator is under automatic condition, when it shuts home landing locking switch, the elevator will complete all the registered car command services, automatically return to home landing, it enters into parking condition. As soon as locking switch is on, it immediately returns from parking condition and goes into normal running.
Cancellation of the error register	If the passenger presses the car command button at certain floor and has registered it by mistake, (by then the car indicating lamp is bright), if under the condition of none elevator running, the passenger only double-click the car command button at the same floor to cancel the register. (By then the car indicating lamp out.)
Automatic correction of floor signal	If the floor display position has error, after the system detects terminal switch in the travel, it will automatically correct the floor display.
Cancellation of the reverse command(s) in the car	When the elevator travels to the farthest floor and changes the speed, it removes all the car command register.
Self-diagnostic embedded call button	If on certain storey, the call button was pressed over certain time but not disconnected, the system assumes that it is embedded button. It does not register the landing call of the same floor afterwards. Responsive lamp which corresponds to the button keeps flickering for alarming. When the button disconnects, it exits from above condition.
Re-leveling function	If the elevator parks on the current floor, when too many passengers enter into / leave the elevator, the car is separated from the leveling zone because of wire rope extension or shortening. The elevator will then travel to the leveling position at low speed under the condition of door-opening.


Healthy Elevator Ride (Optional)

Car UV Disinfection




After the elevator has been unused for a certain period of time, it communicates and controls with the elevator to automatically light up the ultraviolet lamp for disinfection and sterilization. Ultraviolet rays can disinfect and sterilize various common pathogenic bacteria, with a sterilization rate of more than 99%, providing passengers with a safe and clean elevator environment.



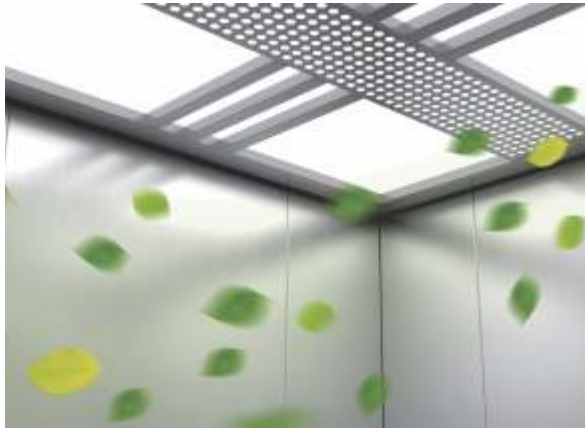

Negative Ion Fresh Air System



Automatically releasing negative ions, adsorbing small dust particles, oxidizing foreign objects in the air, purifying the air, and caring for human health.

Car Air Purifier



Automatic dust removal and sterilization, clean and pollution-free, keeping the air inside the elevator car clean and hygienic at all times. The automatic operation time can be set, which is energy-saving and environmentally friendly.





📍 Cité Mourtada 2 Sipres Bande,
verte lot 104, VDN, Dakar 25000,
Senegal, West Africa.

✉ marketing@grvertiq.com

🌐 www.grvertiq.com

☎ +221 711 200 277