Wallmount Sink Faucets





Specification: (example)

- CAST BRASS two handle wallmount sink faucet
- · Polished chrome plated finish
- BRASS swing spout
- Supplied with adjustable centers 175 mm to 235 mm (6.87" to 9.25")
- ADA compliant color indexed 102 mm (4") metal hooded blade handles with vandal resistant screws
- Control mechanism is a 1/4 turn cylinder type with brass stem, stainless steel plate and replaceable non-metallic seats

and ... with ... (add spout required)



Engineer/Architect Approval

Model Specified:

Approval: Date:

DESCRIPTION	PRODUCT NO.					
Less integral stops	28P4		0	2	LF	



SPOUT	OUILEI	HAND	
			V
0	Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator	o	
1	1	1	
239 mm (9.4°) Tubular Swing Spout	2	2 102 mm (4") Hooded Blade Handles	
3	3	3	
4 Tubular Swing Spout	4	4	
5	5	5	
6	6	6	
7	7	7	
8	8	8	
9 205 mm [8.06"] Tubular Swing Gooseneck Spout	9	9	

Note: The ONLY spouts available are those shown above. Refer to www.specselect.com for individual models. Flowrates (Note: Use this page front and back as a product su




TECK®


Wallmount Sink Faucets

Approvals:

- CSA certified
- Complies to ASME A112.18.1
- Hooded Blade Handle No.2
 ADA Compliant and meet
 Handica pped Access ibility
 Standard ASME A117.1 of less than
 5 lbs. operating force.
 - . .
- IAPMO listed
- Verified compliant with .25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)



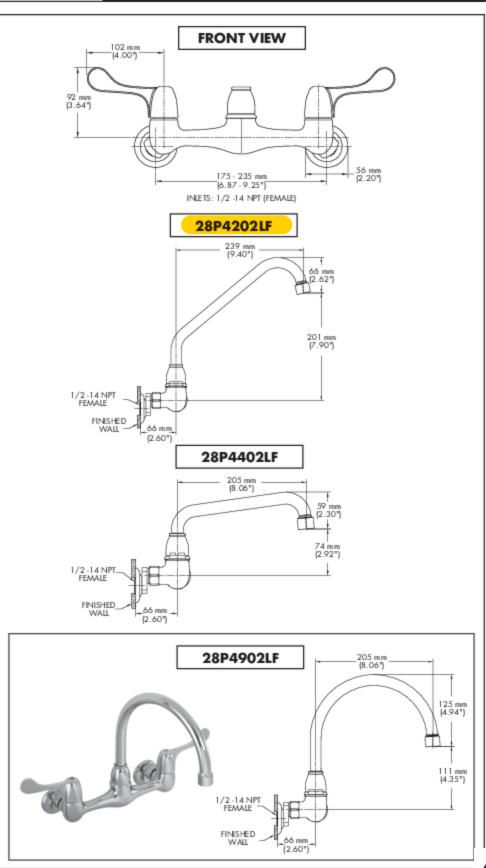



Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sh