



WS-2W, WS-3W Econo-Wall Showers

- Completely Preassembled Shower Unit
- Hydrostatically Tested to 150 PSI
- Ready for Connection to Plumbing Supplies

Specifications

Materials

Shower panel is type 304 stainless steel polished to a #4 finish. All other exposed parts are stainless steel or chrome-plated brass. Valve bodies are brass casting. Supply inlets are copper tubing.

Standard Equipment

Flow Control

A 2.0 GPM (7.6 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.5 GPM (9.5 LPM) Max.

Shower Panel

Shower panel with top and bottom covers constructed of 18 gauge stainless steel polished to a #4 finish. Stainless steel soap tray for each station mounted to panel.

Showerhead

Standard fixed direction adjustable spray showerhead for each station.

Supply Inlets

Constructed of 3/4" type "L" copper tubing. Inlets are accessible through the back of the shower or through knockouts in the top cover.

Optional Privacy Compartments

Partitions

Fabricated of 20 gauge 300 series stainless steel sheets polished to a #4 finish. Sandwich type construction with waterproof cores securely bonded between sheets. Partitions are secured to posts with 14 gauge type 300 stainless steel stirrups and stainless steel screws.

Posts


Fabricated 18 gauge 1-1/4" square x 80" stainless steel tubing. Post is secured to floor with an expansion anchor and a concealed foot angle which allows plus or minus 1/2" vertical adjustment.

Curtains

Curtain rails fabricated of 300 series #4 finish stainless steel cylindrical tubing. Curtain hooks are steel wire with a zinc chromate finish. Curtains are 60" W x 74" H and fabricated of heavy gauge translucent vinyl with hemmed edges and aluminum grommet reinforced eyelets.

Hardware

All exposed fasteners are vandal-proof stainless steel. Post shoes are anodized aluminum and finished to match stainless steel.

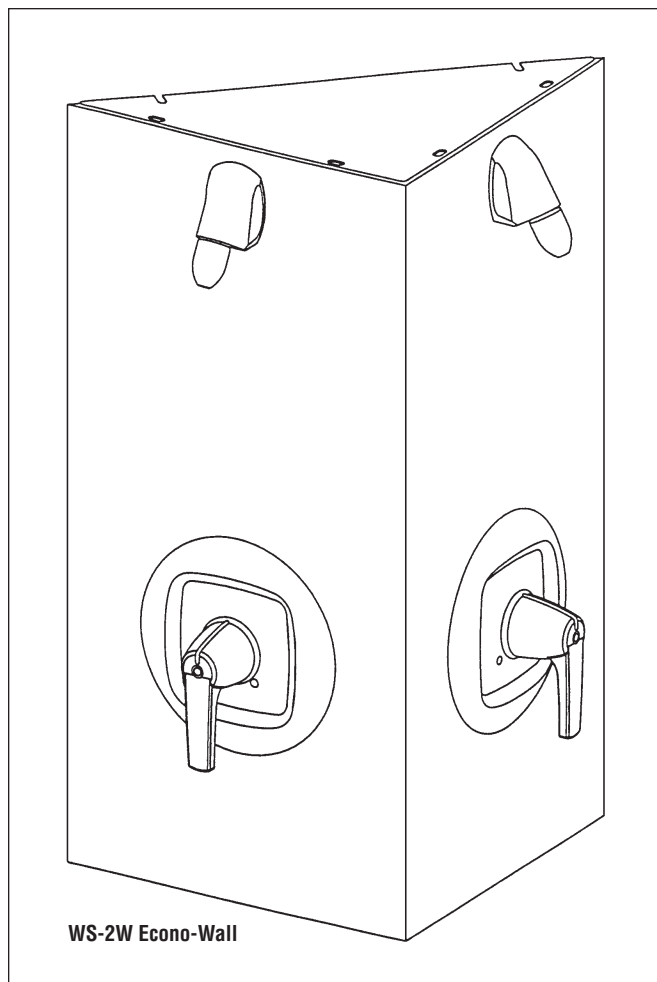

1289820





WS-2W, WS-3W Econo-Wall Showers

Models (Must select one)	
Model Number	Description
<input type="checkbox"/> WS-2W	2-Station Econo-Wall Shower
<input type="checkbox"/> WS-3W	3-Station Econo-Wall Shower
Standard Selections (Must select one from each category)	
Showerhead Height (select one)	
<input type="checkbox"/> 6'-0" Standard Height	
<input type="checkbox"/> 5'-6" Juvenile Height	
Valve Type (select one)	
<i>Hot/Tempered and Cold Supplies</i>	
<input type="checkbox"/> EF Equa-Flo Pressure Balancing Valve	
<input type="checkbox"/> HD Equa-Flo HD Pressure Balancing Valve	
<input type="checkbox"/> TMV Thermostatic Mixing Valve	
<input type="checkbox"/> HC Hot and Cold Compression Valve*	
<i>Single Tempered/Cold Supply</i>	
<input type="checkbox"/> AZ Infrared Metering Valve* **	
<input type="checkbox"/> PM Presto 50B Mechanical Metering Valve	
<input type="checkbox"/> AST Air Metering Valve	
<input type="checkbox"/> SV Single Compression Valve	
<input type="checkbox"/> TT TouchTime® Metering Valve**	
Optional Selections	
Showerhead Variations	
<input type="checkbox"/> SX Severe Service Showerhead	
<input type="checkbox"/> SF Deluxe Showerhead with Ball Joint	
<input type="checkbox"/> ES Economy Soft Flow with Ball Joint	
Flow Control (Not available with SF Showerhead)	
<input type="checkbox"/> G 1.5 GPM (5.7 LPM) Flow Control	
Volume Control (Not available with SX or ES Showerhead)	
<input type="checkbox"/> AKV Allen Key Volume Control	
<input type="checkbox"/> THV T-Handle Volume Control	
Ball Joint (Not available with SX or ES Showerhead)	
<input type="checkbox"/> LBJ Lockable Ball Joint	
Miscellaneous	
<input type="checkbox"/> SHV Vertical Shroud	
Showerhead Height _____	
Floor to Ceiling Height _____	
<input type="checkbox"/> SHH Horizontal Shroud (Per 3' Section) *	
<input type="checkbox"/> RSD Recessed Soap Dish	
<input type="checkbox"/> ST Stops in Supplies	
<input type="checkbox"/> VS Vandal Resistant Screws	
Multi-Station Partitions	
<input type="checkbox"/> MS Multi-Station Partitions	
Multi-Stall Options	
<input type="checkbox"/> HR Herculite Curtain	
<input type="checkbox"/> RH Roller Hooks	
<input type="checkbox"/> BH Robe Hook	

* Non-cancelable, non-returnable

**AZ and TT valves require optional 24V Class 2 transformers, available as a separate item from Bradley. PT (S83-134) 24V Plug In Transformer (1/2 amp) Up to 2 showers. 4RT (S45-2045) 24V Remote Transformer (2amp) Up to 4 showers.

1289820







WS-2W, WS-3W Econo-Wall Showers

Dimensions – WS-2W and WS-3W with Multi-Stall Partitions

(mm)



WS-2W

Detail B

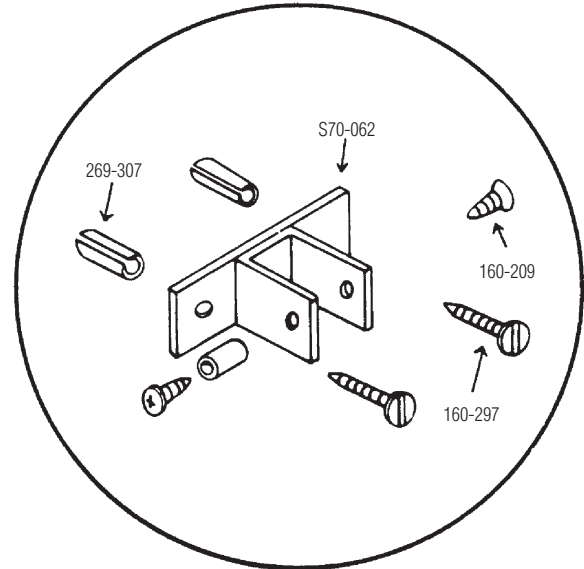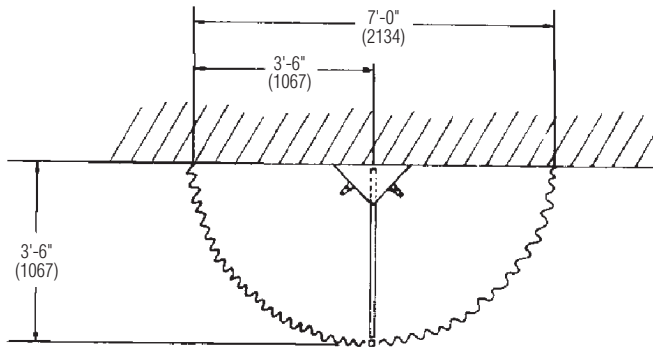

WS-3W

Detail A-A

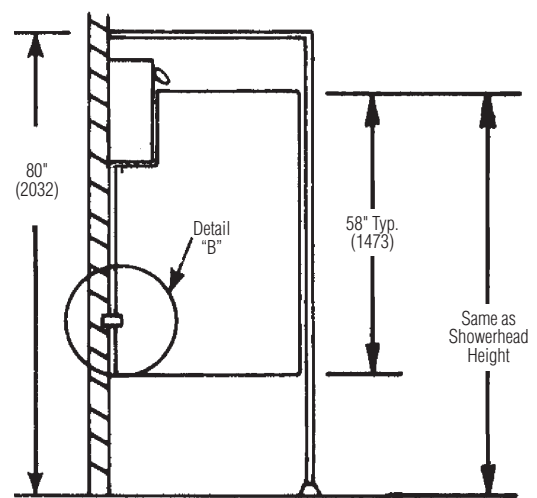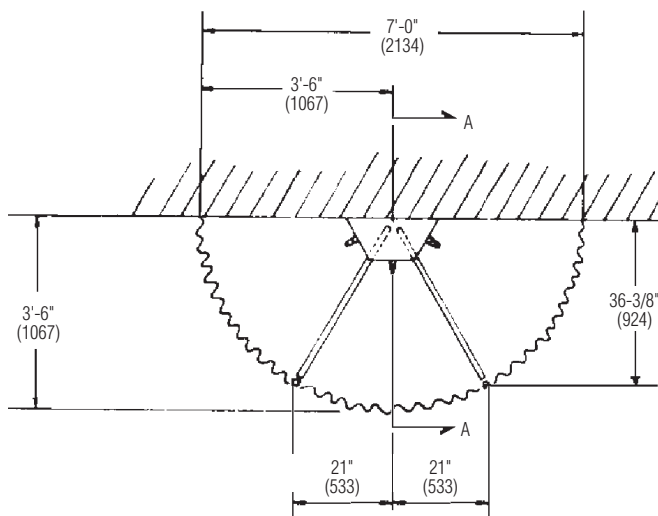

* Subtract 4" (102) from this dimension for juvenile height.

1289820






WS-2W, WS-3W Econo-Wall Showers


Rough-Ins

(mm)


Front View

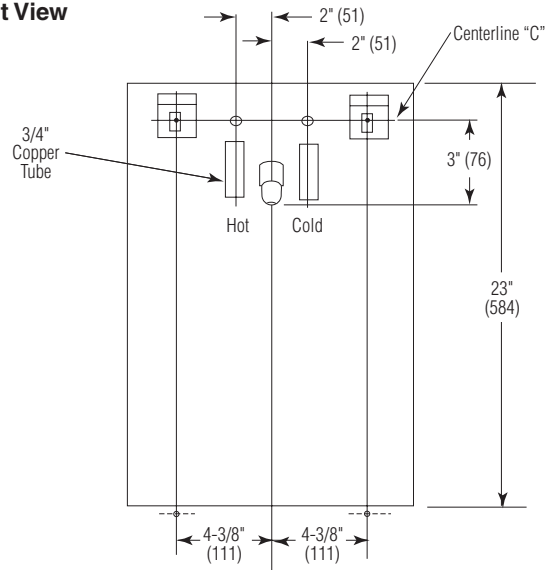


Side View

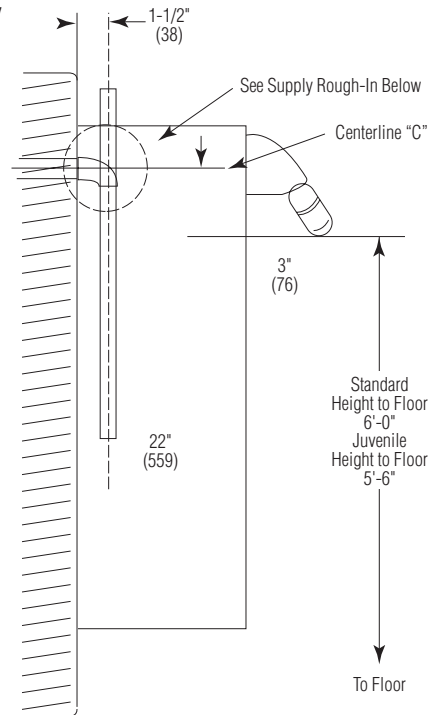

Top View

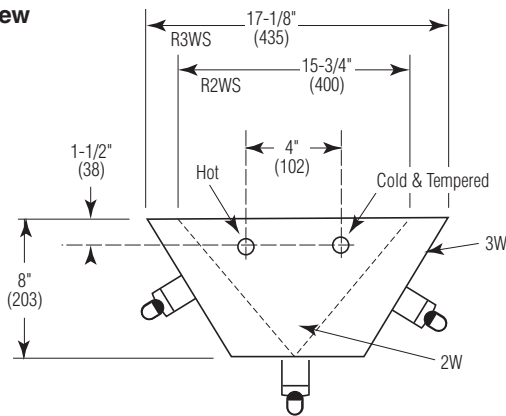

Bracket

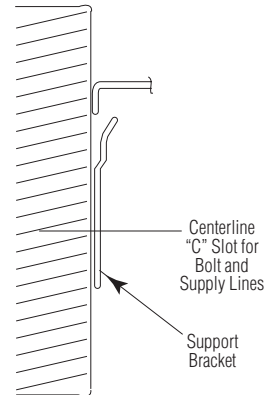

1289820

