



**WS-1WCA**  
**Individual Coverall Wall Shower**

- Quick, Easy Installation
- Completely Preassembled Wall Shower Unit

**Specifications**

**Materials**

Shower panel is type 304 stainless steel. All other exposed parts are stainless steel or chrome-plated brass. Valve bodies are brass casting. Supply inlets are flexible stainless steel hoses.

**Standard Equipment**

**Flow Control**

A 2.0 GPM (7.6 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.5 GPM (9.5 LPM) Max.

**Shower Panel**


Constructed of 18 gauge stainless steel with stainless steel soap tray mounted to panel. Shower panel top and bottom covers are sloped, and constructed of 16 gauge stainless steel.

**Showerhead**

Standard fixed direction adjustable spray showerhead.

**Supply Inlets**

Supply inlets are flexible, stainless steel hoses with 1/2 NPT connections. Inlets are accessible through the back of the shower or through knockouts in the top and bottom covers.

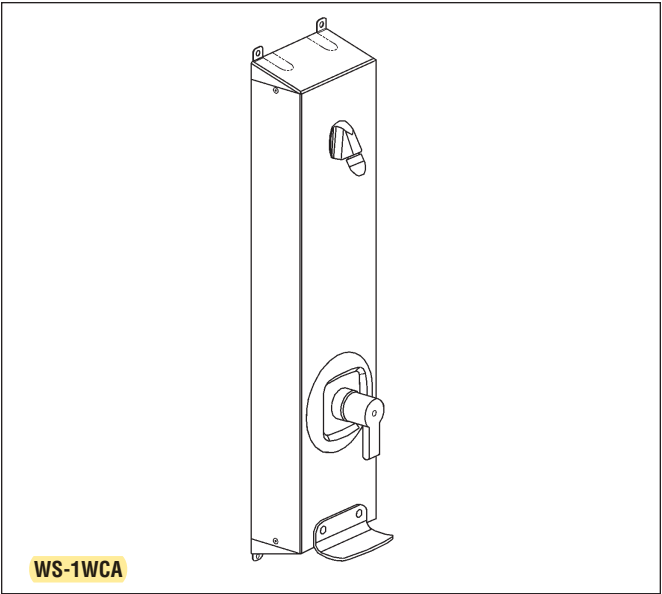

**WS-1WCA**

**Standard Selections** (Must select one from each category)

**Valve Type (select one)**

*Hot/Tempered and Cold Supplies*

- ☒ **EF** Equa-Flo Pressure Balancing Valve
- ☐ **HD** Equa-Flo HD Pressure Balancing Valve
- ☐ **TMV** Thermostatic Mixing Valve
- ☐ **HC** Hot and Cold Compression Valve\*

*Single Tempered/Cold Supply*

- ☐ **AZ** Infrared Metering Valve\* \*\*
- ☐ **PM** Presto 50B Mechanical Metering Valve
- ☐ **AST** Air Metering Valve
- ☐ **SV** Single Compression Valve
- ☐ **TT** TouchTime® Metering Valve\*\*

**Optional Selections**

**Showerhead Variations**

- ☒ **SX** Severe Service Showerhead
- ☐ **SF** Deluxe Showerhead with Ball Joint
- ☐ **ES** Economy Soft Flow with Ball Joint

**Optional Flow Control (Not available with SF Showerhead)**

- ☐ **G** 1.5 GPM Flow Control

**Volume Control (Not available with SX or ES Showerhead)**

- ☐ **AKV** Allen Key Volume Control
- ☐ **THV** T-Handle Volume Control

**Ball Joint (Not available with SX or ES Showerhead)**

- ☐ **LBJ** Lockable Ball Joint

**Miscellaneous**

- ☐ **SHV** Vertical Shroud:  
Showerhead Height \_\_\_\_\_  
Floor to Ceiling Height \_\_\_\_\_
- ☐ **SHH** Horizontal Shroud (Per 3' Section)\*
- ☐ **RSD** Recessed Soap Dish
- ☐ **ST** Stops in Supply for Valves (included with EF, HD and TMV valves)
- ☐ **VS** Vandal Resistant Screws

\*Non-cancelable, non-returnable

\*\*AZ and TT valves require optional 24V Class 2 transformers, available as a separate item from Bradley. PT (S83-134) 24V Plug In Transformer (1/2 amp) Up to 2 showers. 4RT (S45-2045) 24V Remote Transformer (2amp) Up to 4 showers.

1161434







# WS-1WCA Individual Coverall Wall Shower

Dimensions

With Optional Vertical Shroud

(mm)

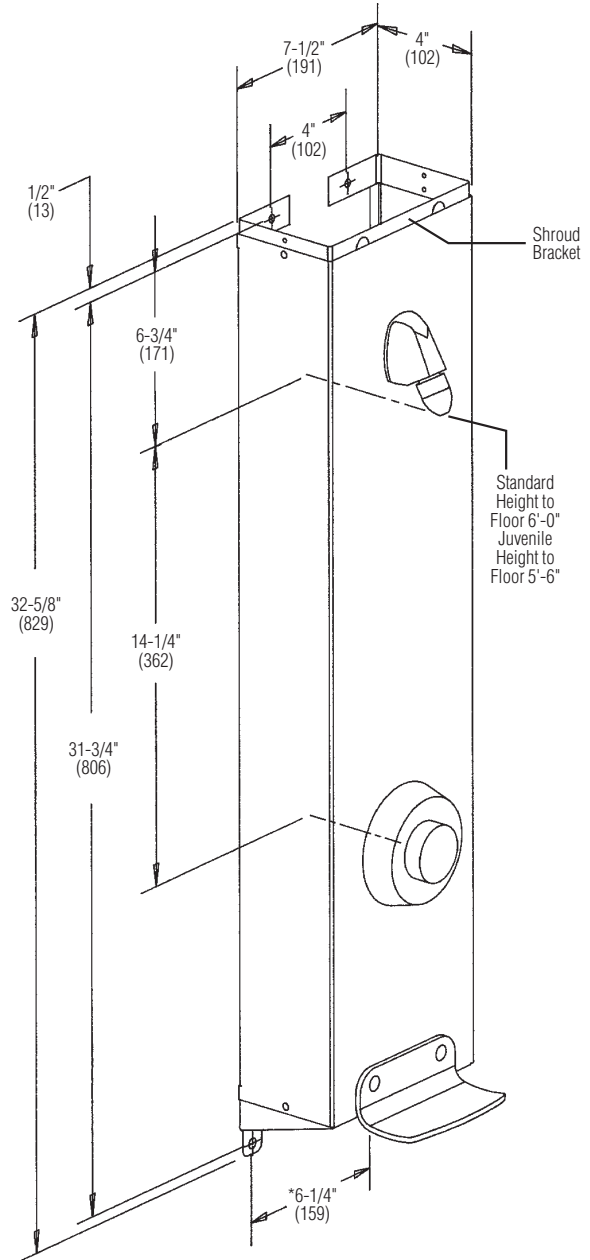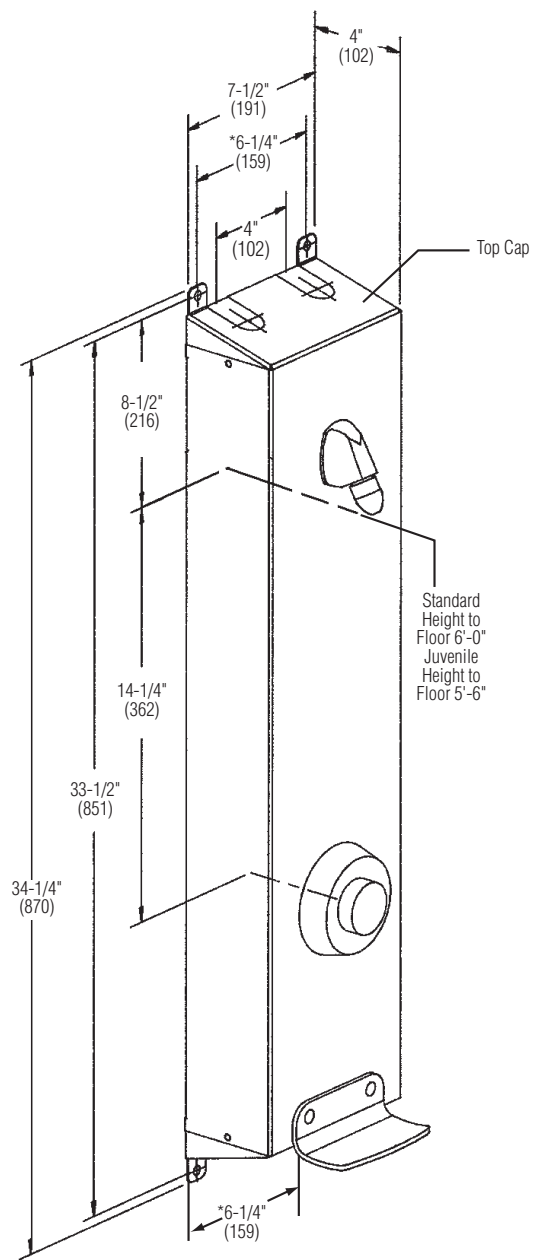

1161434

\* Typical of both top and bottom cover plate mounting tab.

