

**HN250****Surface-Mounted ADA Compliant Wall Shower**

- Ideal for Barrier-Free Shower Rooms
- Flexible Supply Hoses Make Rough-In Easier
- Completely Preassembled, Surface-Mounted Wall Unit

Specifications**Shower Stall Configuration**

Available in a right or left-handed configuration depending on location of valve.

Construction**Materials**

All exposed materials, except for phenolic seat, are type 304 stainless steel or polished chrome-plated brass. Shower panel is 16 gauge and grab bar is 18 gauge. Valve bodies are brass casting. Supply hoses are 24" flexible stainless steel.

Barrier-Free (ADA Compliant)

When installed properly in a 3' x 3' stall, the HN250 provides a shower stall designed to comply with all known ADA guidelines on reaches, clearances, and operation. Controls are mounted 48" above the floor to accommodate all users.



Check local applicable codes for dimensional compliance.

Standard Equipment**Shower Panel**

Constructed of 16 gauge stainless steel with recessed soap dish.

Showerhead

Standard fixed direction adjustable sprayhead.

Diverter Valve

Lever handle operation for easy transfer of water flow between fixed and hand-held shower spray.

Hand-Held Shower Spray

Consisting of hand shower with on-off control, a 60" stainless steel flexible hose and post style mounting bracket to hold to shower panel. Elevated in-line backflow preventer with quick-disconnect for flexible hose.

Supply Inlets

Supply inlets are 24" flexible, stainless steel hoses with 1/2" NPT connections.

Flow Control

A 2.0 GPM (7.6 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.5 GPM (9.5 LPM) max.

L-Shaped Grab Bar


Grab bar fabricated of 18 gauge 1-1/2" O.D. stainless steel tubing with a 1-1/2" safety statute clearance. Flanges are 11 gauge. Load capacity in excess of 300 lbs.

Barrier-Free Seat

Reversible phenolic shower seat. Load capacity of 250 lbs. See technical data document 9027 for additional information.

Shower Curtain

Vinyl shower curtain with heavy-duty curtain rod and hooks.

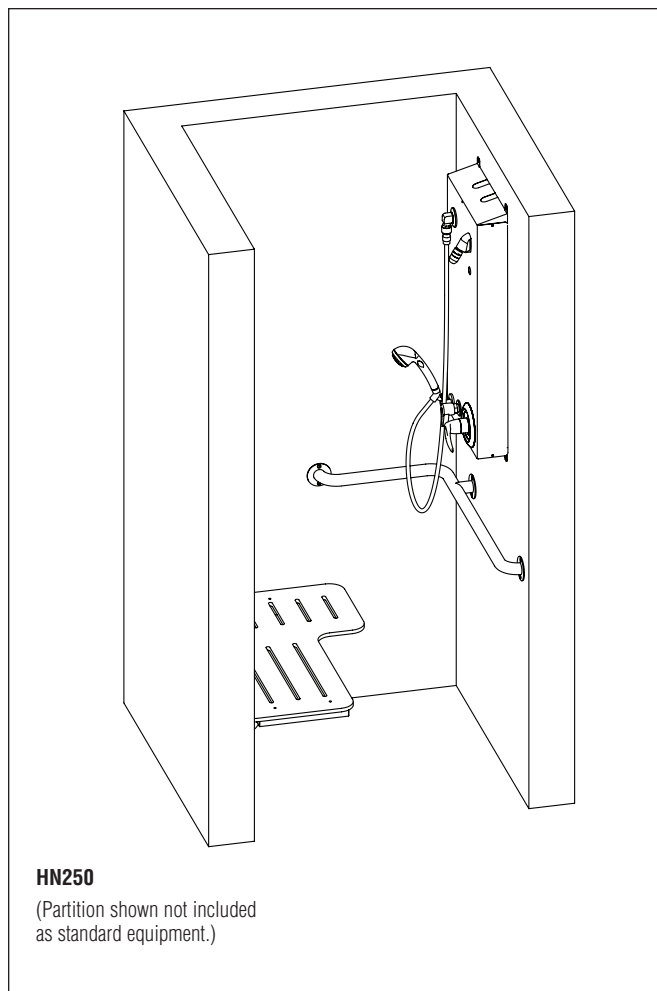

966902





HN250

Surface-Mounted **ADA** Compliant Wall Shower

Model <input checked="" type="checkbox"/> HN250	Description Surface-Mounted ADA-Compliant Wall Shower
--	---

Standard Selections	
Showerhead Height (select one)	
<input checked="" type="checkbox"/> 6'-0" Standard Height	
<input type="checkbox"/> 5'-6" Juvenile Height	

Valve Type (select one)	
<input checked="" type="checkbox"/> EF	Equa-Flo Pressure-Balancing Valve
<input type="checkbox"/> HD	Equa-Flo HD Pressure-Balancing Valve
<input type="checkbox"/> TMV	Thermostatic Mixing Valve
<input type="checkbox"/> AST	Air Metering Valve
<input type="checkbox"/> AZ	Infrared Metering Valve**
<input type="checkbox"/> SVL	Single Compression Valve with Lever Handle
<input type="checkbox"/> TT	TouchTime® Metering Valve

Shower Stall Configuration (Select one Configuration and one Seat Style)			
<input checked="" type="checkbox"/> VL/SR	Valve Left/Seat Right	<input type="checkbox"/> RSS	Reversible Phenolic Shower Seat
		<input type="checkbox"/> RHS	Right Hand Stainless Steel Seat

<input type="checkbox"/> VR/SL	Valve Right/Seat Left	<input type="checkbox"/> RSS	Reversible Phenolic Shower Seat
		<input type="checkbox"/> LHS	Left Hand Stainless Steel Seat

Optional Selections	
Showerhead Variations	
<input type="checkbox"/> SX	Severe Service Showerhead
<input checked="" type="checkbox"/> SF	Deluxe Showerhead with Ball Joint
<input type="checkbox"/> ES	Economy Soft Flow with Ball Joint

Flow Control (Not available with SF Showerhead)	
<input type="checkbox"/> G	1.5 GPM (5.7 LPM) Flow Control (Showerhead and Hand Shower)

Volume Control (Not available with SX or ES Showerhead)	
<input type="checkbox"/> AKV	Allen Key Volume Control
<input type="checkbox"/> THV	T-Handle Volume Control

Ball Joint (Not available with SX or ES Showerhead)	
<input type="checkbox"/> LBJ	Lockable Ball Joint

Miscellaneous	
<input type="checkbox"/> DBS	Deduct Barrier-Free Seat
<input type="checkbox"/> DCR	Deduct Curtain, Rod and Hooks
<input type="checkbox"/> DGB	Deduct Grab Bar
<input type="checkbox"/> F2S	Fixed 2nd Showerhead in place of Hand Shower
<input type="checkbox"/> SB	Slide Bar
<input type="checkbox"/> SHV	Vertical Shroud
	Showerhead Height _____
	Floor to Ceiling Height _____
<input type="checkbox"/> SHH	Horizontal Shroud*
<input type="checkbox"/> ST	Stops in Supplies
<input type="checkbox"/> RP	Reinforced Partition Kit
<input type="checkbox"/> VS	Vandal Resistant Screws

*Non-cancelable, non-returnable

**AZ and TT valves require optional 24V Class 2 transformers, available as a separate item from Bradley.

Provide Shower with two heads, one mounted at 4'-0" and the other at 6'-0" as called for on schedule.


966902





HN250 Surface-Mounted ADA Compliant Wall Shower



Shower Panel/Grab Bar Rough-In

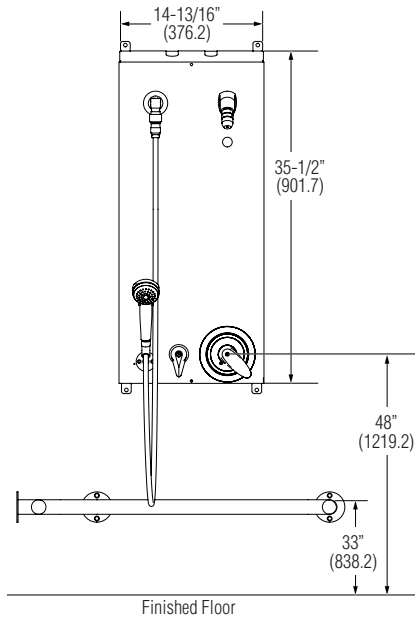


Dimensions for ADA Compliance

(mm)

Supplies Rough-In

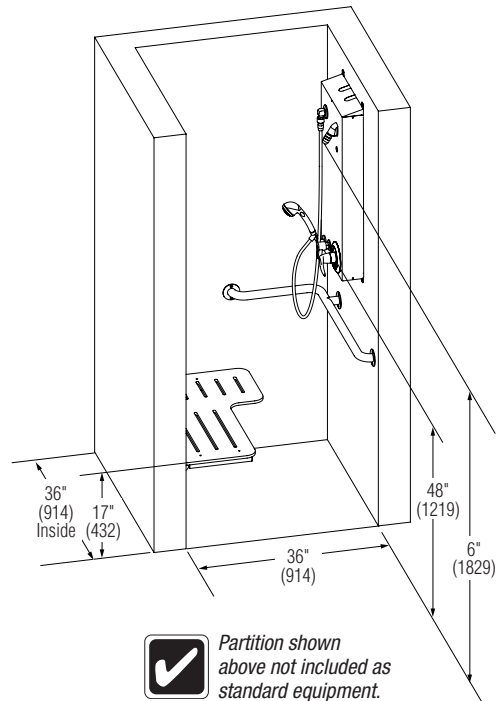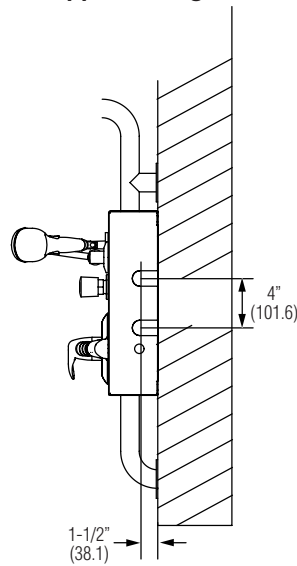

Valve Right/Seat Left Configuration

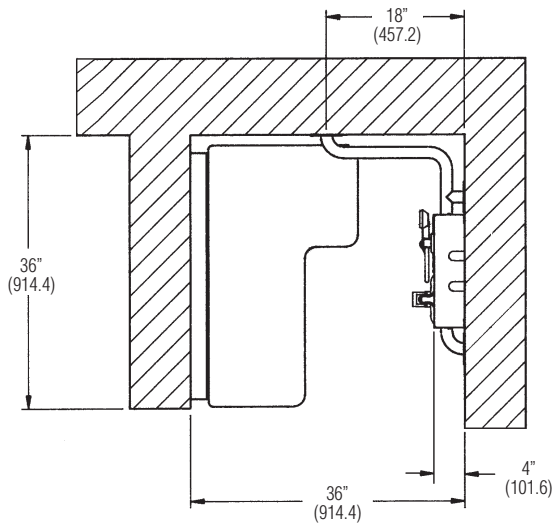

For Valve Left/Seat Right configuration, mirror dimensions for Valve Right/Seat Left.

966902

