S1770

⋖

NONE

SUPERSEDED

Р

NO RESPONSIBILITY FOR

WE CAN ASSUME

9

DRAWN BY:

AND CHANGE

TO MANUFACTURERS


DRAWING NUMBEF



ROOF ACCESSORY

DOWNSPOUT NOZZLE

FUNCTION: Used as a parapet overflow or at the base of a wall where a concealed leader discharges rainwater to ground. Nozzle design diverts water away from building, eliminating wall stains. Wall flange covers rough opening and serves as anchor.

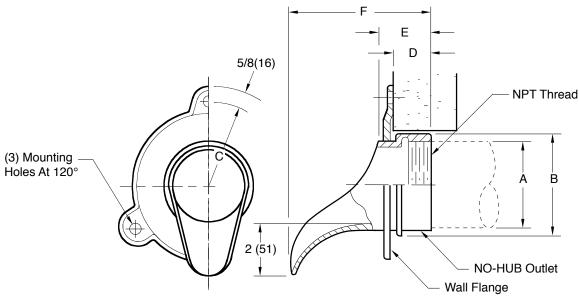

NOTE: For ADA Compliant See Fig. 1770-ADA

Fig. 1770T.....Threaded Outlet

Fig. 1770Y....NO-HUB Outlet 02(50), 03(75), 04(100) and 06(150)

★★ When -NB is specified with NO-HUB outlet, ALL SIZES will be supplied with a 2646Y NO-HUB adaptor.

				×			×	×	×
A=PIPE	02(50)	03(75)	04(100)	05(125)	06T(150)	06Y(150)	08(200)	10(255)	12(305)
B=DIA	2 3/4	4	5	6	7 1/4	7 1/4	9 1/4	11 1/8	13 1/4
D=DIA	(70)	(100)	(125)	(150)	(185)	(185)	(235)	(283)	(335)
C=RAD	2 3/4	3 1/2	3 7/8	4 3/8	5	5	5 7/8	7 1/4	8
C=NAD	(70)	(89)	(98)	(111)	(125)	(125)	(149)	(185)	(205)
D	1 3/8	1 3/8	1 3/8	1 3/8	1 3/8	1 13/16	1 5/8	1 3/4	2
ט	(35)	(35)	(35)	(35)	(35)	(46)	(41)	(44)	(51)
_	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16	2 1/2	2 3/8	2 3/4	2 15/16
E	(52)	(52)	(52)	(52)	(52)	(64)	(60)	(70)	(75)
_	5 5/8	5 5/8	5 5/8	5 5/8	5 5/8	6 1/4	5 15/16	5 3/8	7 9/16
F	(143)	(143)	(143)	(143)	(143)	(160)	(149)	(138)	(192)

REGULARLY FURNISHED:

VARIATIONS:

OPTIONAL MATERIALS: Nickel Bronze -NB

Cast Bronze Nozzle and Flange.

Bird Screen -BS NO-HUB Adaptor (specify Fig. 2646Y) [5"(125), 8"(200), 10"(255) and 12"(305) only]

Polished Bronze -PB Chrome Plated -CP

> NOTE: Dimensions shown in parentheses are in millimeters.

K H G	8-30-19 10-18-18 5-26-16 01/14/11	Rev. Opt. Mat./Added Note ** Added Note ADA Compliant Rev. Optional Materials Added NO-HUB Outlet	MW TBW TBW JJ	CL CL TK TK	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
RFV	DATE	DESCRIPTION	BY	CKD BY			