




# ZS880

## STAINLESS STEEL LINEAR SHOWER DRAIN

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

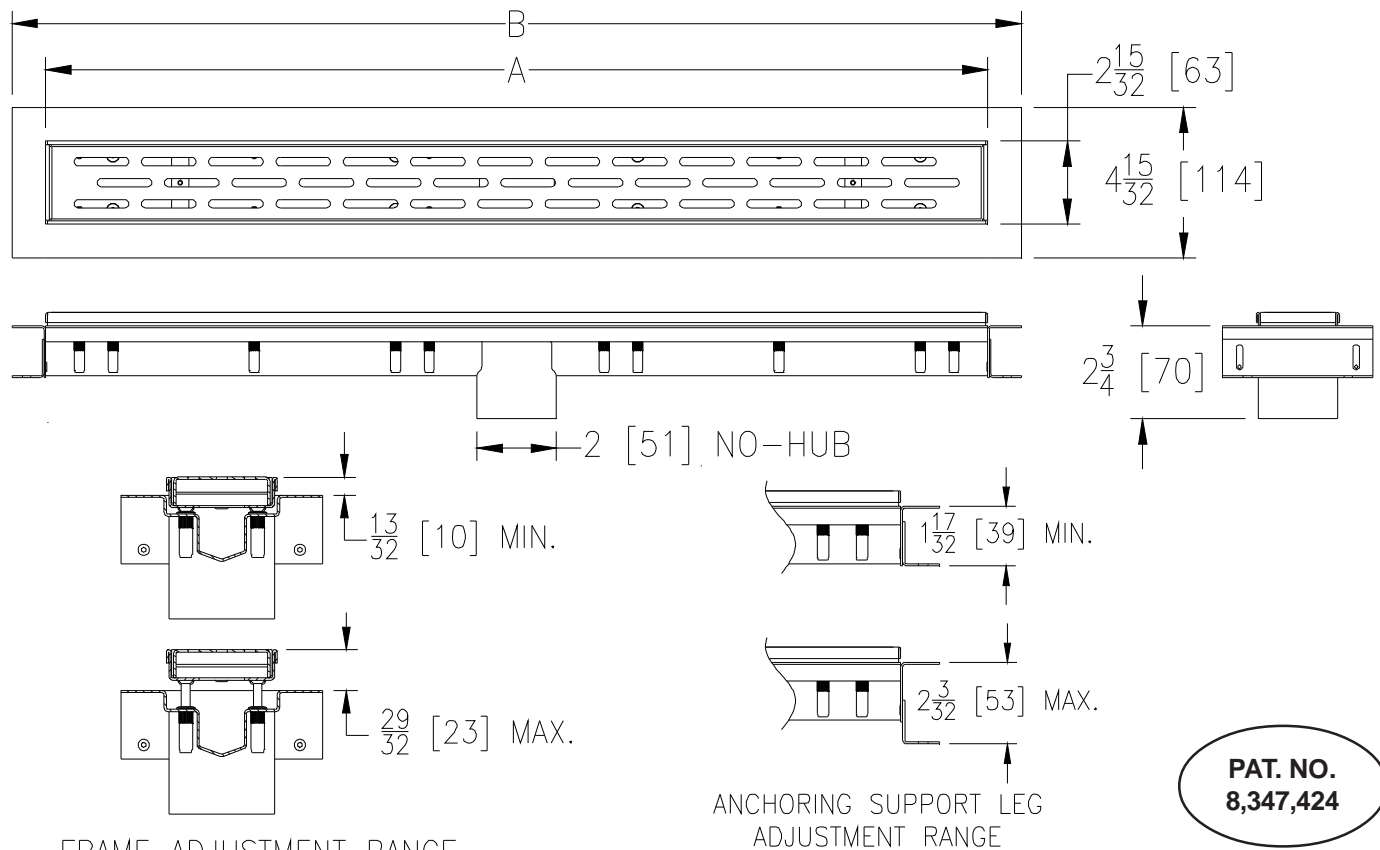

FRAME ADJUSTMENT RANGE

ANCHORING SUPPORT LEG  
ADJUSTMENT RANGE

Dimensions In Inches [mm]			Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
Product Designation	A	B		
-12	12 [305]	14 [356]	2.9 [1.3]	6 [38]
-28	28 [711]	30 [762]	5.4 [2.5]	15 [97]
-32	32 [813]	34 [864]	5.9 [2.7]	18 [116]
-36	36 [914]	38 [965]	6.4 [2.9]	20 [129]
-40	40 [1016]	42 [1069]	7.2 [3.3]	22 [142]
-48	48 [1219]	50 [1270]	8.4 [3.8]	27 [174]
-60	60 [1524]	62 [1575]	10.3 [4.7]	34 [219]
-72	72 [1829]	74 [1880]	12.4 [5.6]	41 [265]

**ENGINEERING SPECIFICATION: ZS880**

All Type 304 (CF8) Fabricated Stainless Steel Linear Shower Drain. Complete with vertically adjustable anchoring support legs, anti-ponding V-shaped channel with 2" [51 mm] No-Hub center outlet, adjustable secured leveling frame with built-in tile edge, integral membrane flange for glue on waterproofing membrane, and secured, light-duty, slotted heel-proof grate. Drain is designed for installation in a minimum 2" [51 mm] concrete pour and can be adjusted to accommodate 1/4" [6 mm] and 3/8" [10 mm] finished tile thicknesses.

**OPTIONS** (Check/specify appropriate options)**PREFIXES**

- \_\_\_ ZS All Type 304 (CF8) Stainless Steel\*  
\_\_\_ ZR All Type 304 (CF8) Stainless Steel w/ Oil-Rubbed Bronze Finish

**GRATE OPTIONS**

- \_\_\_ -BW Basket Weave Grate  
\_\_\_ -DB Decorative Block Grate  
\_\_\_ -SG Serenity Grate  
\_\_\_ -TG Tile In-Lay Grate  
\_\_\_ -WG Wave Grate

**SUFFIXES**

- \_\_\_ -2 Two Bottom Outlets (2 [51] No-Hub, Not Available on Size -12)  
\_\_\_ -2IP 2 [51] Female IP Threaded Outlet  
\_\_\_ -3 Three Bottom Outlets (2 [51] No-Hub, Not Available on Size -12)  
\_\_\_ -EO End Bottom Outlet (2 [51] No-Hub, Not Available on Size -12)  
\_\_\_ -FS Outlet Filter Screen  
\_\_\_ -KC Clamp Collar on Anchor Flange  
\_\_\_ -LB Lower Body With Membrane Clamp Collar  
\_\_\_ -SO Side Outlet (2 [51] No-Hub), Not available with -LB Option

\* Regularly furnished unless otherwise specified