

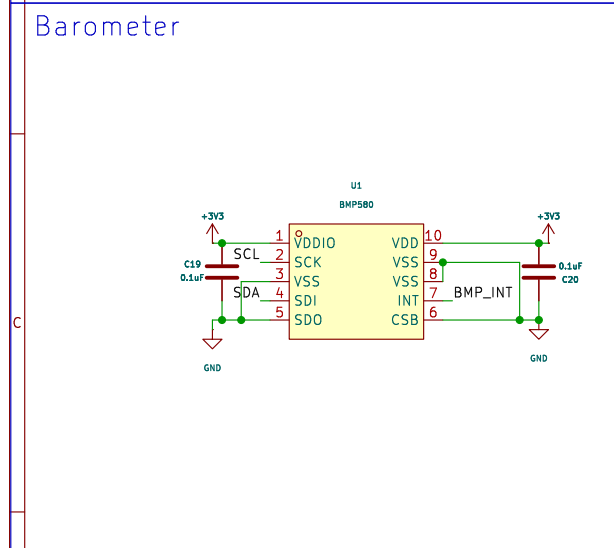


USB-C


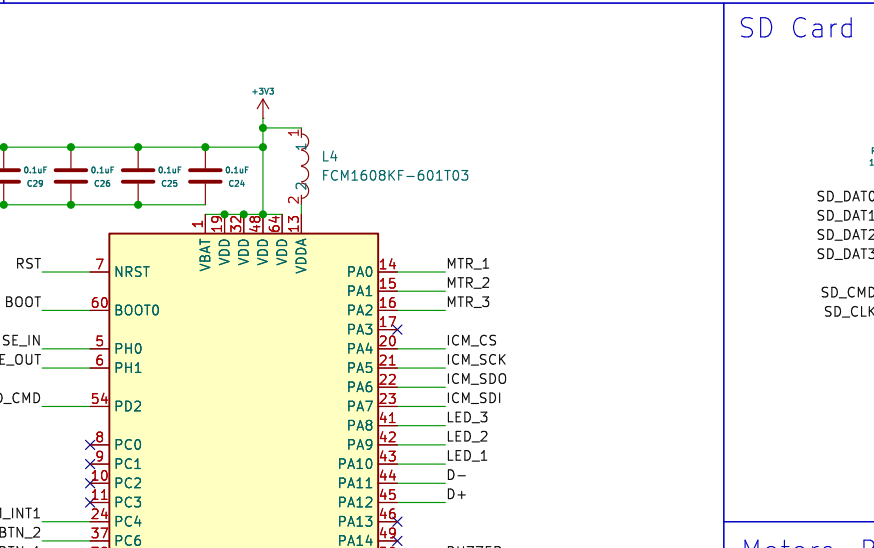


Battery Charging

The diagram illustrates the battery charging circuit for the DFE25012F-1 microcontroller. The microcontroller (U2: BQ25083RGER) is the central component, with its pins connected to various external components. The circuit includes a +3V3 regulator, a +BATT input, and a +BATT output. Key components include: Inductor L5 (2.2mH), capacitors C1 (1uF), C2 (10uF), C3 (4.4uF), C4 (10uF), C5 (10uF), C6 (47nF), and resistors R1 (10K), R2 (10K), R3 (300K), R4 (10K), R5 (5.23K), R6 (30.1K), and R7 (10K). The circuit also includes a screw terminal J2 (Screw_Terminal_01x02) for +BATT and GND.

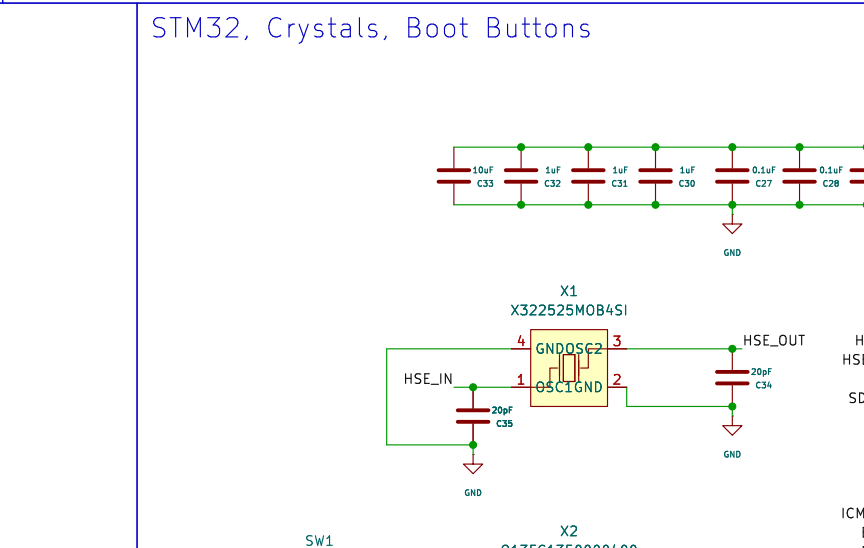



3.3V Converter

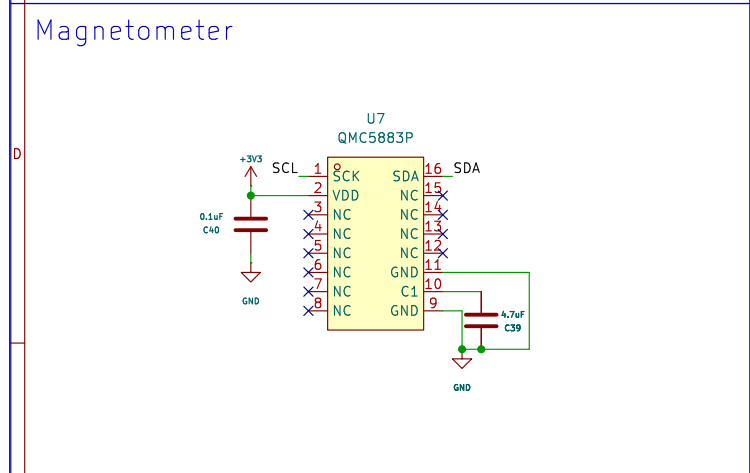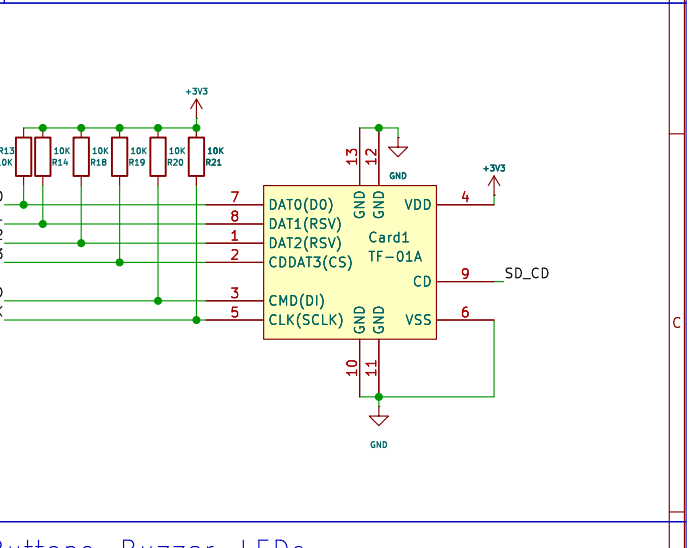

The diagram shows the connection between a microcontroller and an SD card module. The microcontroller pins are connected to the module pins as follows:

- SD_DAT0 to 7
- SD_DAT1 to 8
- SD_DAT2 to 1
- SD_DAT3 to 2
- SD_CMD to 3
- SD_CLK to 5
- GND to 10
- +3V3 to 4

The module also has a +3V3 input and a GND connection.

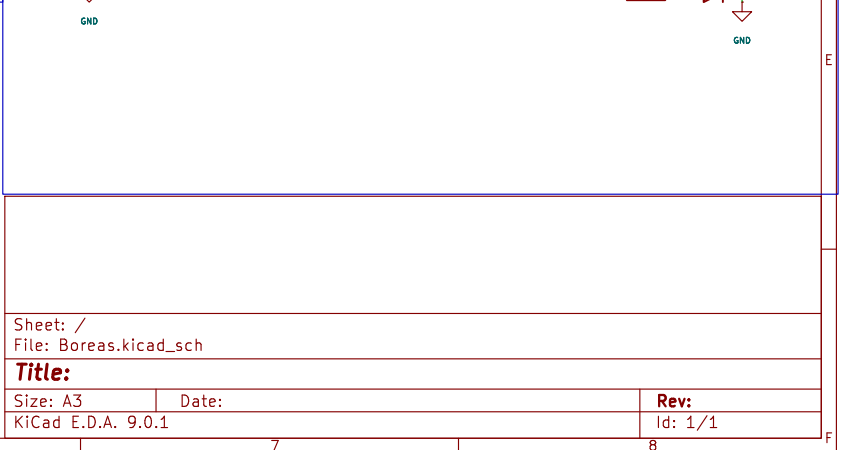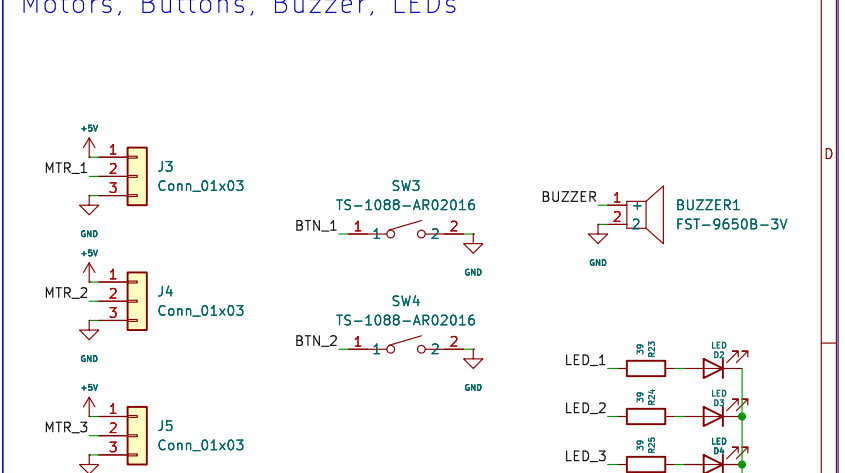[illegible]

by darsh !!