

Battery, 5V Buck, 3v3 LDO

The schematic shows a power management section. It starts with a battery connection (J1, Conn_01x02) providing +BATT. This feeds into a 5V Buck converter (U1, TPSM56201RHT) and a 3v3 LDO (U2, TPSM64201RHT). Various capacitors (C1, C2, C3, C4, C5) and resistors (R1, R2, R3, R4, R5) are used for filtering and regulation. The output of the LDO is +3.3V.

Camera

The Camera section shows two camera modules (J8, J9, Conn_01x03, Conn_01x02) connected to a camera controller (U3, LPS912-3.30RVR). The controller has pins for EP, IN, OUT, NC, EN, and PG. It is powered by +5V and +3.3V. A 1uF capacitor (C4) is connected to the +5V supply.

GPS

The GPS section shows a GPS module (J5, Conn_01x06) connected to a GPS receiver (U4, LPS912-3.30RVR). The module has pins for GPS_TX, GPS_RX, CAM_VID, and SDA. It is powered by +5V and +3.3V.

VTX



The VTX section shows a VTX module (J6, Conn_01x04) connected to a VTX transmitter (U5, LPS912-3.30RVR). The module has pins for VTX_TX, VTX_RX, and SDA. It is powered by +5V and +3.3V.

Receiver

The Receiver section shows a receiver module (J7, Conn_01x04) connected to a receiver (U6, LPS912-3.30RVR). The module has pins for RECEIVER_RX, RECEIVER_TX, and SDA. It is powered by +5V and +3.3V.

Power Sensing


The Power Sensing section shows two power sensing modules (J10, J11, Conn_01x04, Conn_01x04) connected to power sensing ICs (U7, U8, LPS912-3.30RVR). The modules have pins for V_ESC, C_ESC, and SDA. They are powered by +5V and +3.3V.

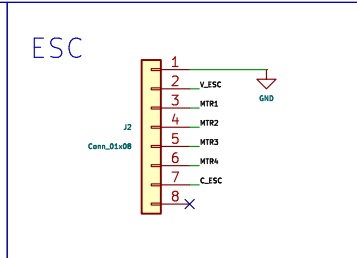

MCU

X3
DSX321G 8MHz

4 NC OSC2 3 HSE_OUT
1 HSE_IN 2 18pF C31
C30 18pF NC
GND

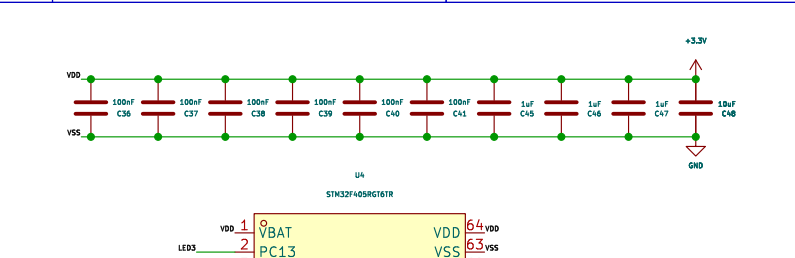

SPI Memory

