EXPERIMENT – 3

Configure inter-VLAN routing (router – on – a – stick or L3 switch SVI); test with default gateways
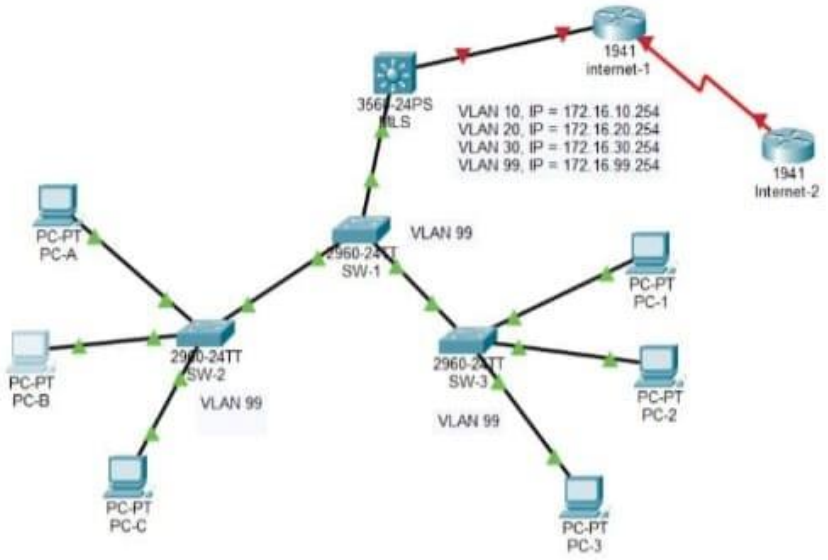
---