




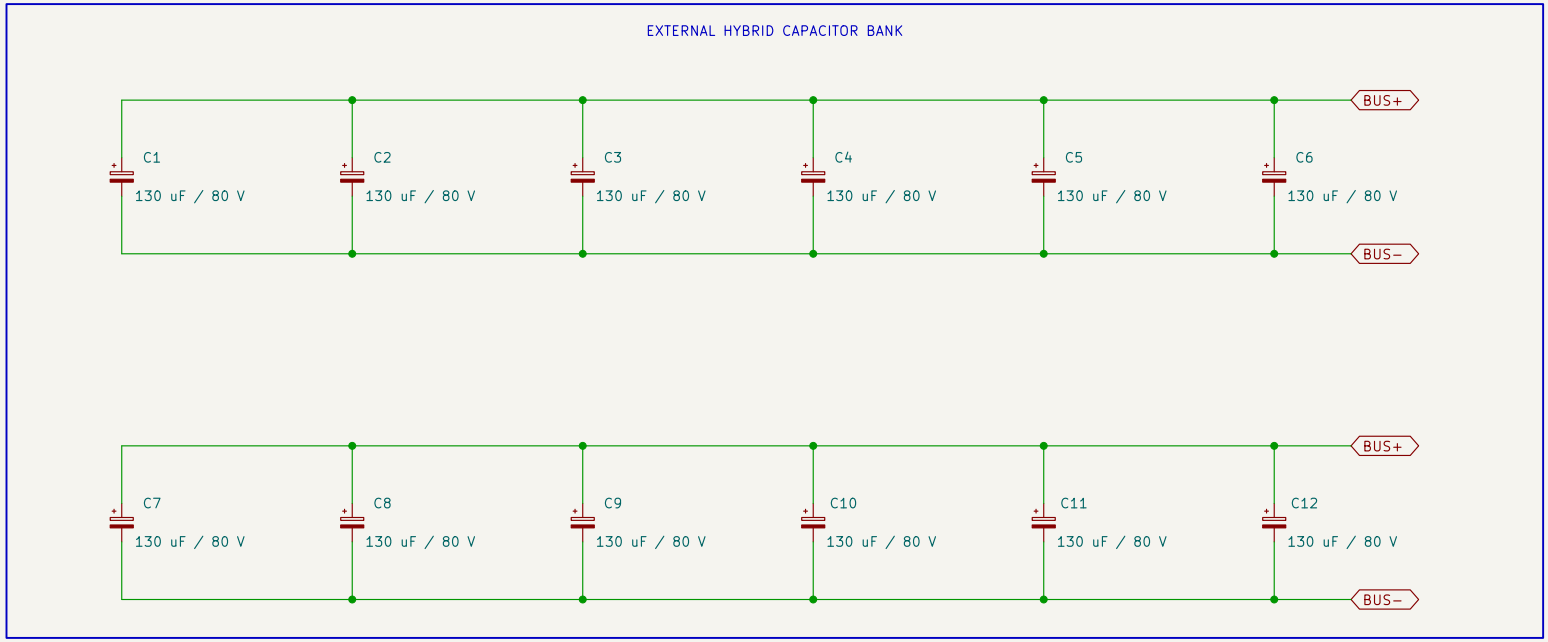

Paired inverter supply leads





12 x 130 uF = 1560 uF nominal; 1248 uF minimum (−20%).
80 V capacitors do not raise the inverter 54 V ceiling.
Retain local inverter bypass. Paired leads: 4–6 inches maximum.
Draft footprints/current sharing/inrush remain to qualify.

Sheet: /
File: CapacitorBank.kicad_sch

Title: External DC-link bank | 10–54 V | DRAFT

Size: A4	Date: 2026-10-10	**Rev: DRAFT 0.1**
KiCad E.D.A. 10.0.7		Id: 1/1