


1 INPUT / HOT-SWAP

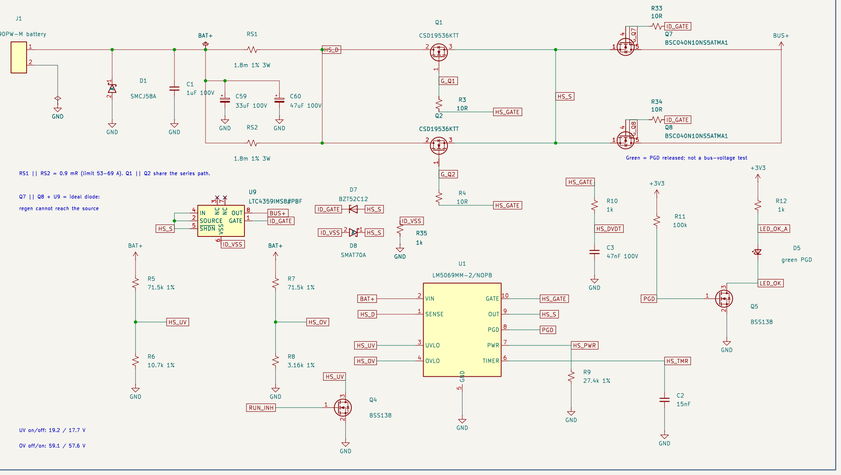


2 DC LINK / CHAIN PORTS

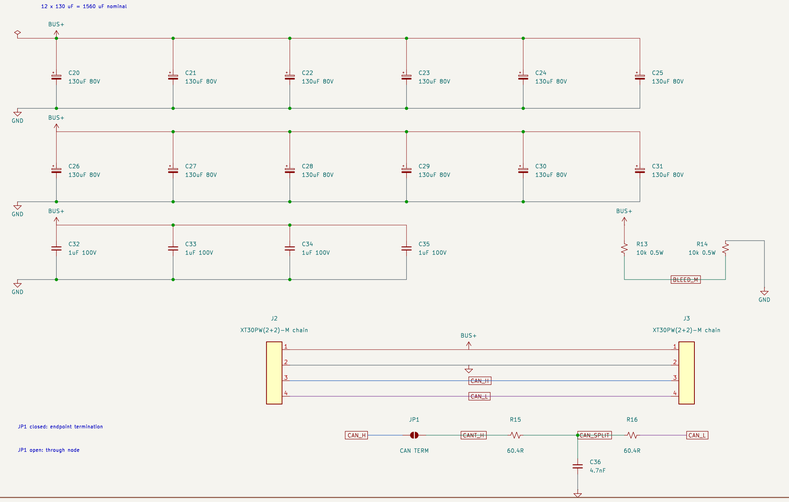


3 HOUSEKEEPING: 12 V / 3.3 V

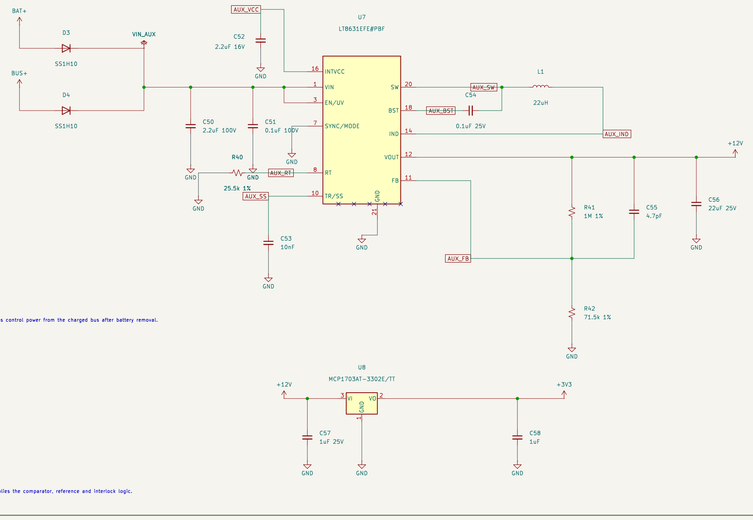


4 REGENERATION / BRAKE COMMAND

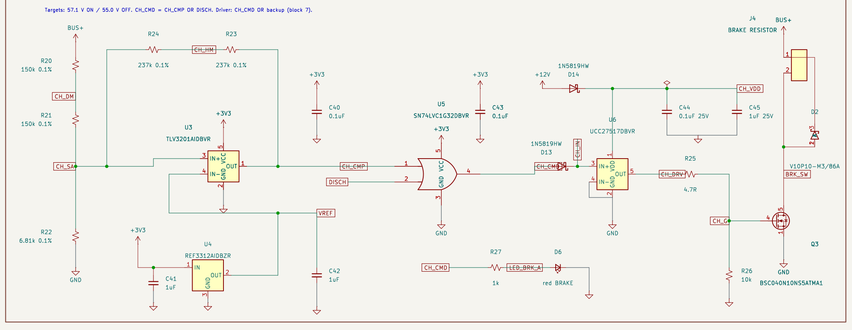


5 RUN / THERMOSTAT INTERLOCKS

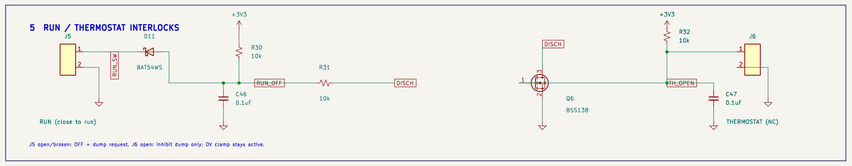

6 HOT-SWAP ENABLE: RUN CLOSED AND AUX 12 V GOOD

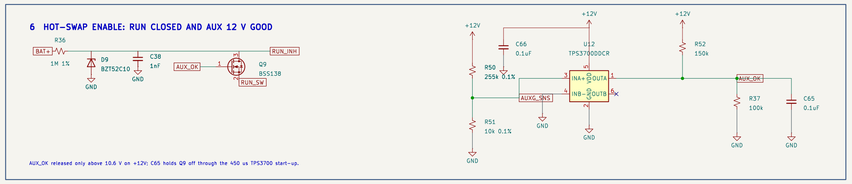

7 BACKUP OVERVOLTAGE BRAKE: BUS-POWERED, NO AUX

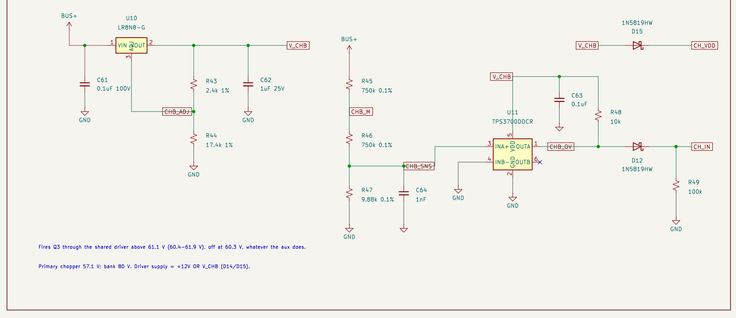

D4 sustains control power from the charged bus after battery removal.

3.3 V supplies the comparator, reference and interlock logic.

Design review in progress; routing held. See support-board-design-review.md

Sheet: /
File: SupportBoard.kicad_sch

Title: Actuator support board | power and control

Size: A1 | Date: 2026-10-24 | **Rev: DRAFT 0.1**
KiCad E.D.A. 9.0.4 | Id: 1/1