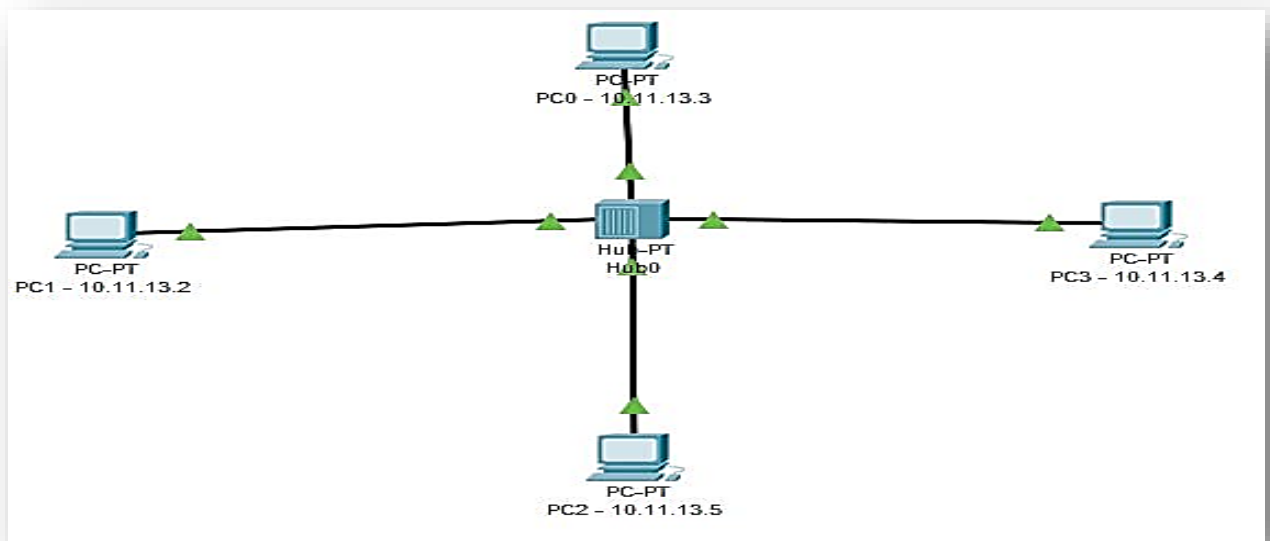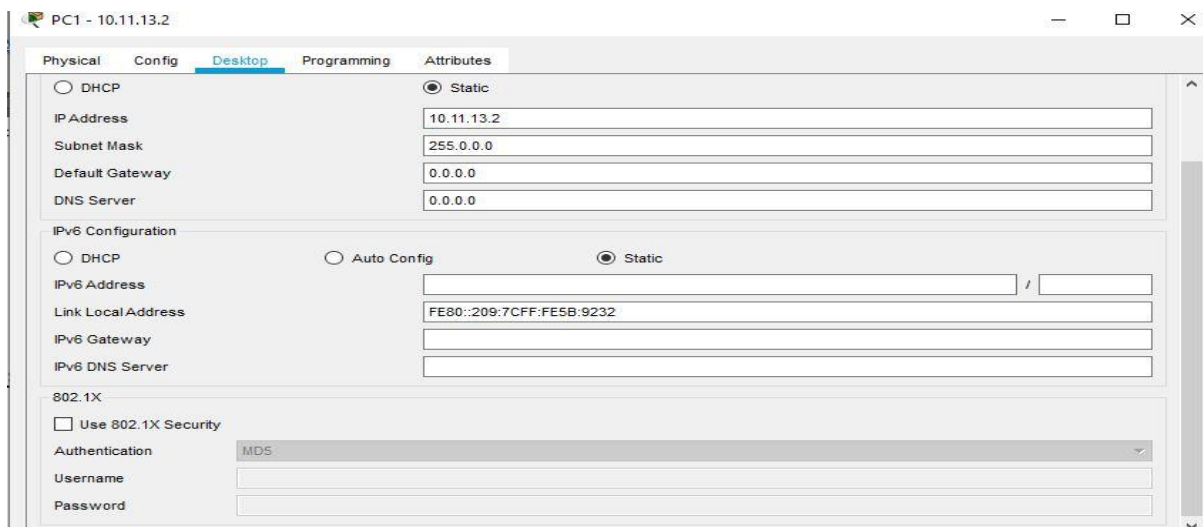**Scenario 1: Understanding the Configuration and Working of HUB**

Assignment of IP Address:

- **PC1:**
    - ➢ Click on PC1 select IP Configuration, assign IP address as **10.11.13.2** and subnet mask as **255.0.0.0** as shown below

    - ➢ Repeat the for PC2, PC3, PC4 with IP's: **10.11.13.3, 10.11.13.4, 10.11.13.5** and subnet mask as **255.0.0.0**
    - ➢ Now press on Simulation Tab, send packet from PC1, to PC3.
    - ➢ Observe the movement of packet in the network topology using paly controls.