



## Scenario 2: Understanding the Configuration and Working of Bridge/Link Layer Switch in the Same Network

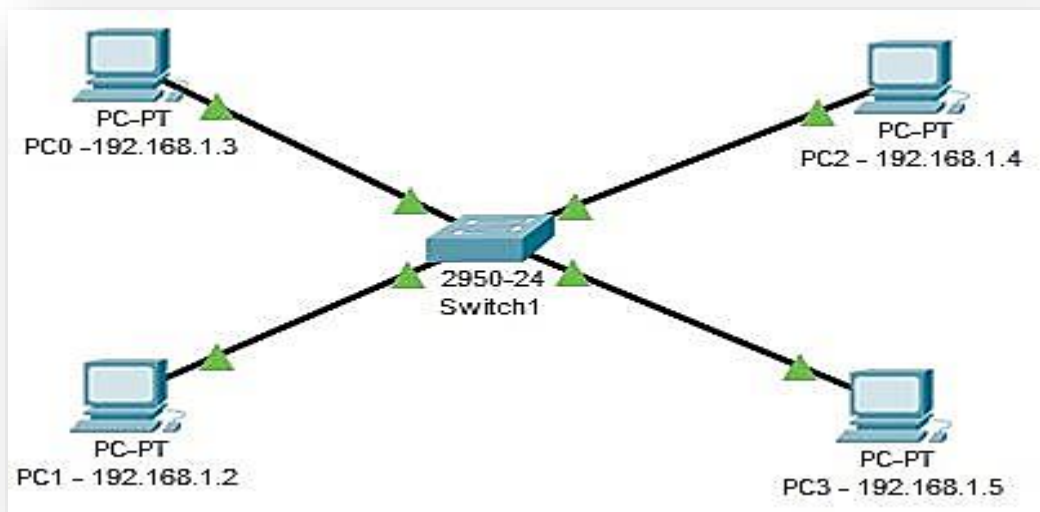

### Assignment of IP Address:

- **PC1:**
  - Click on PC1 select IP Configuration, assign IP address as **192.168.1.2** and subnet mask as **255.255.255.0** as shown below

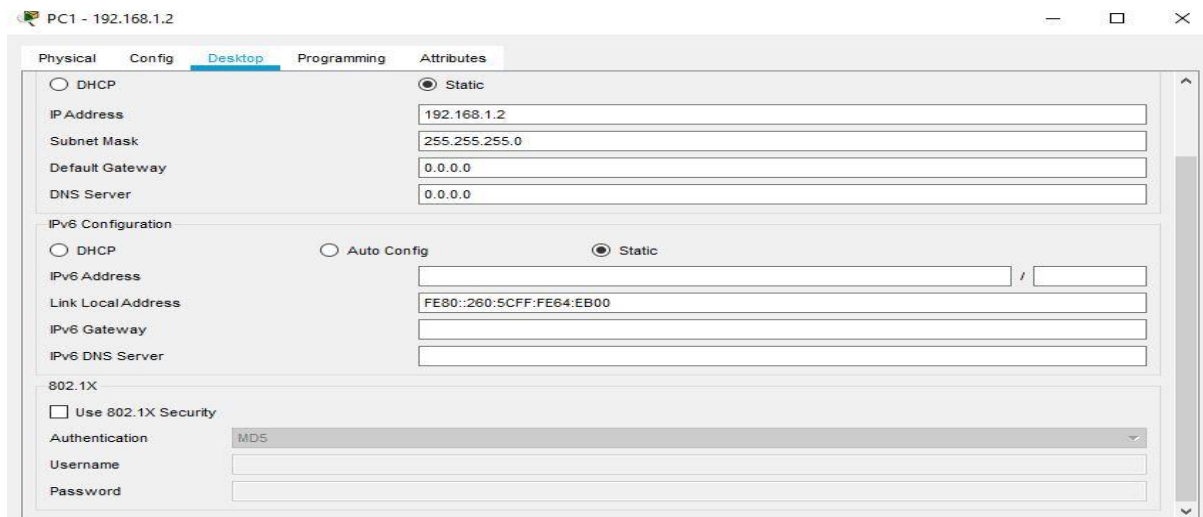

- Repeat the for PC0, PC2, PC3 with IP's: **192.168.1.3**, **192.168.1.4**, **192.168.1.5** and subnet mask as **255.255.255.0**
- Now press on Simulation Tab, send packet from PC1, to PC3.
- Observe the movement of packet in the network topology using paly controls.