

KELI CEE
CENTRAL & EASTERN EUROPE

KELI

Keli Electric Manufacturing(Ningbo)Co.,Ltd.


SQB-D Loadcell


RoHS

OIML




SQB-D 0.25~2.5t

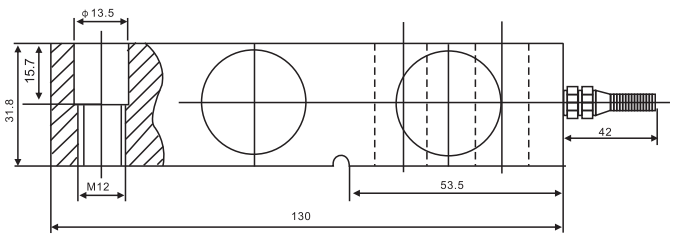

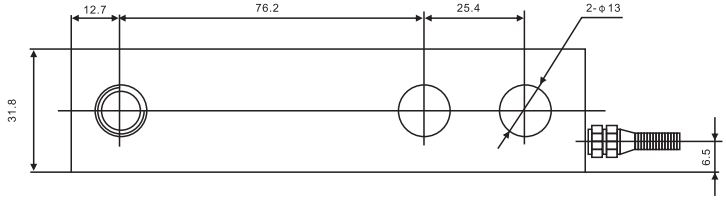


Rated Load (t)	L	L1	L2	L3	L4	H/B	H1	D1	D2	D3
3,5	171.5	19	95.3	38.1	72.5	38.1	26	φ20	M18x1.5	φ20
7.5~10	225.5	25.3	124	50.8	102	50.8	25.4	φ27	M24x2	φ27

SQB-D 3~10t

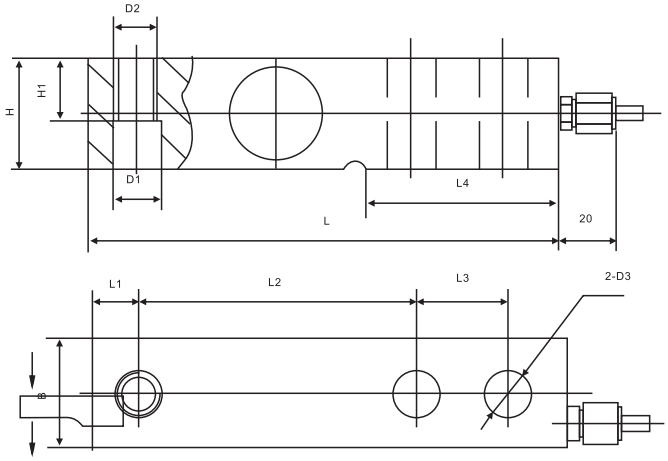

t

SQB-D 0.25~2.5t

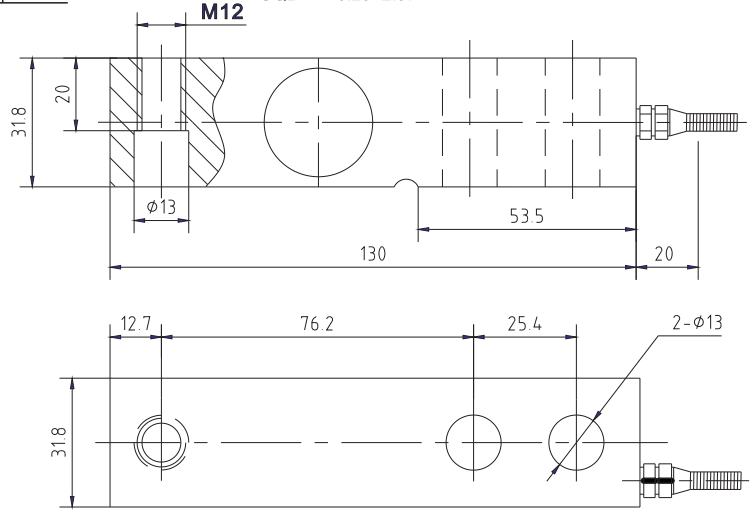

TECHNICAL PARAMETER| 4Wires:Exc+(Red);Exc-(Black);Sig+(Green);Sig-(White)

Rated capacities(Emax)	0.25, 0.3 ,0.5,0.75,1,1.5,2,2.5,3,5,7.5,10t	Temperature range, compensated	–10℃~+40℃
A/D Module resolution	200000	Temperature range, operating	-30~+70℃
Accuracy class	C2~C5	Maximum safe overload	150%F.S
Communication baud rate	9600BPS	Ultimate overload	180%F.S
Zero balance	±1%F.S	Excitation,recommended	10~12V DC
TC ZERO	±0.02%F.S/10℃	Excitation,maximum	15V DC
TC SPAN	±0.02%F.S/10℃	Protection class	IP67(0.25~0.75t);IP68(1~10t)
Insulation resistance	≥5000MΩ	Construction	Alloy Steel Stainless Steel
Data refesh rate	50Hz	Cable	Length:3m(0.25~2.5t),4.2m(3~5t),5m(7.5~10t)
			Diameter: φ5mm(0.25~5t; 0.25~0.3t); φ6mm(7.5~10t, 0.5~10t)

Keli CEE
ul. Zółkiewskiego 3A, 4 piętro
63-400 Ostrow Wielkopolski
tel./fax. +48 62 592 42 78
e-mail: info@keli-cee.pl
www.keli-cee.pl