

	Work Instruction	Doc. Revision	01
	AXI V810 3G Camera Manual IP Configuration Procedure	Effective Date	30 Aug 2017

This procedure is applicable to below models:

V810 STD	☒	S1	☒	S2
V810 XXL	☒	S1	☒	S2
V810 S2EX	☒			
V810 Mini	☐			

REVISION HISTORY

Rev	Effective Date	Description	Doc Originator
00	21 Oct 2016	First Release	Muhammed Shameem
01	30 Aug 2017	Content Update & Template Changes	ONG KEAN SHENG

	Work Instruction	Doc. Revision	01
	AXI V810 3G Camera Manual IP Configuration Procedure	Effective Date	30 Aug 2017

Content

3G Camera Manual IP Configuration.....	3
--	---

	Work Instruction	Doc. Revision	01
	AXI V810 3G Camera Manual IP Configuration Procedure	Effective Date	30 Aug 2017

3G Camera Manual IP Configuration

1. May refer to Figure 1 & Figure 2 for 3G Camera Type.

Remarks Both type are compatible at V810 AXI Equipment

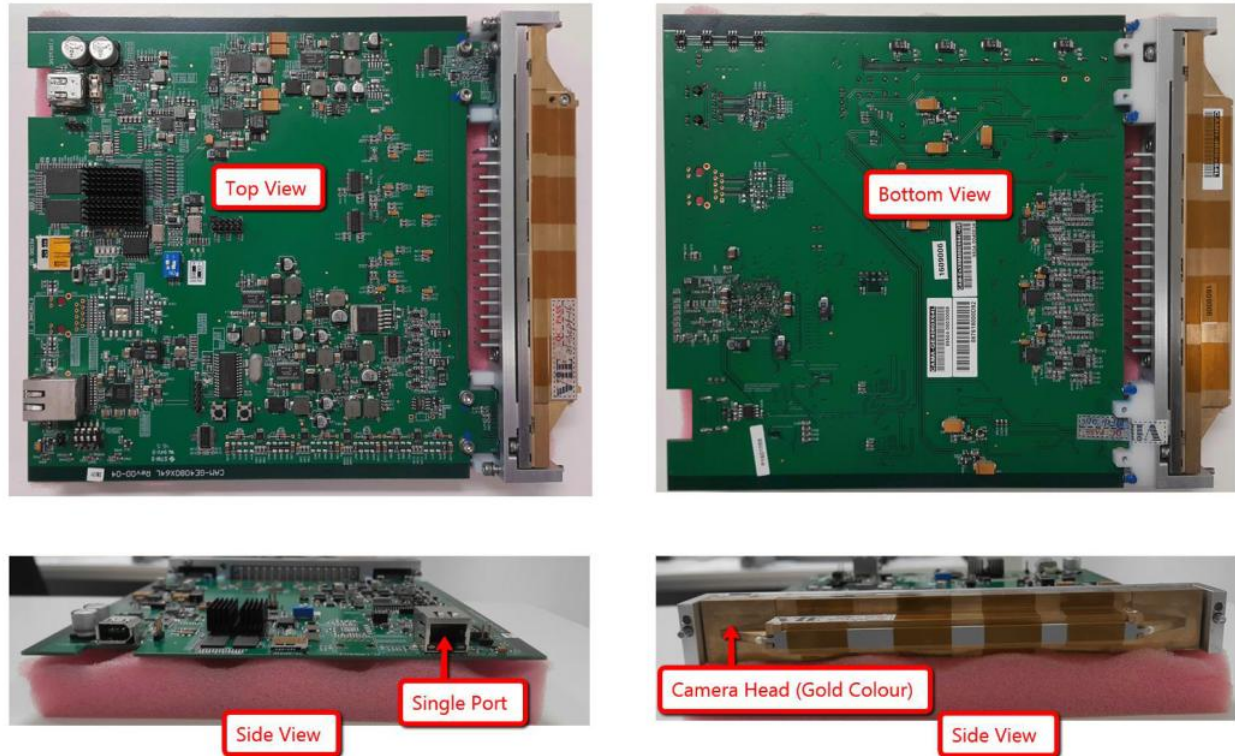


Figure 1 3G Camera (Single Port)

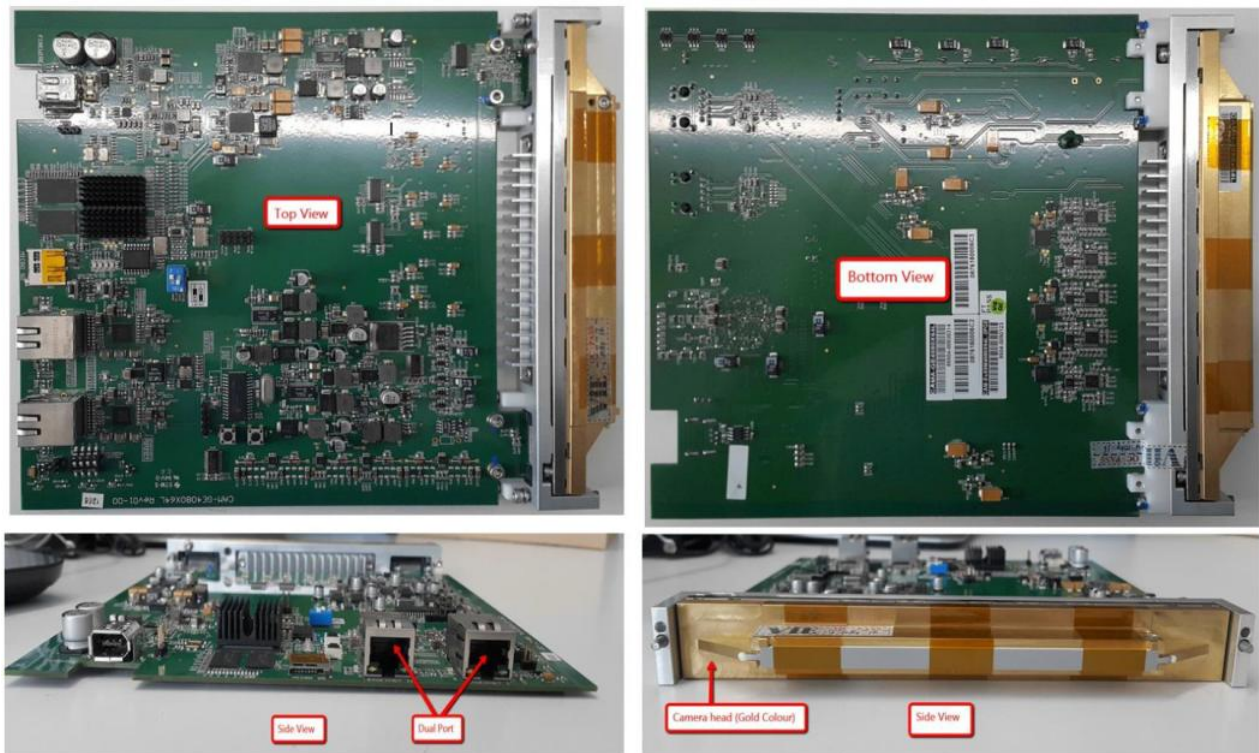


Figure 2 3G Camera (Dual Port)

	Work Instruction	Doc. Revision	01
	AXI V810 3G Camera Manual IP Configuration Procedure	Effective Date	30 Aug 2017

2. Prepare 1 x Jumper (Part ID: 2291-0006) as shown in the Figure 3



Figure 3 Jumper (2291-0006)

3. Gently plug Jumper at 3G Camera Board as below Figure 4

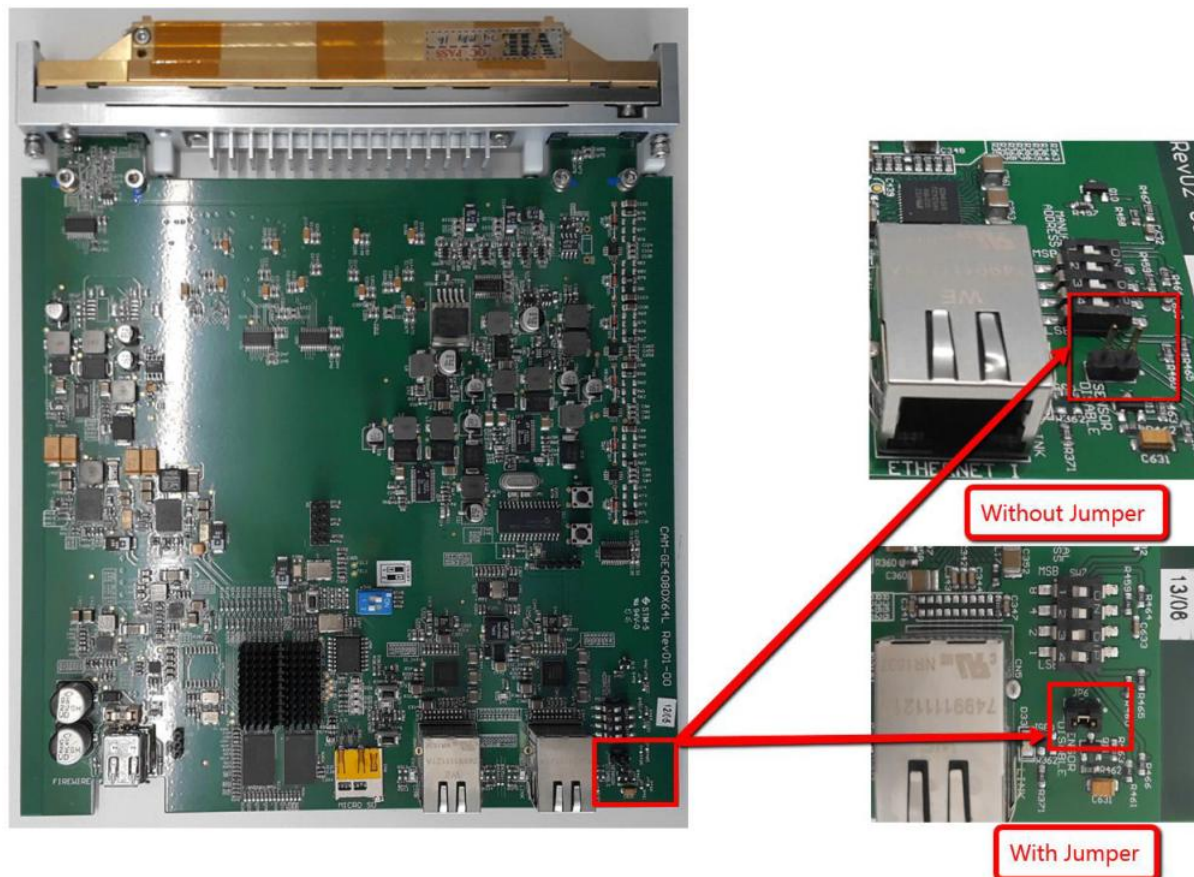


Figure 4 Jumper slot JP6

4. Manually configure DIP Switch to respective Camera ID by refer to Table 1

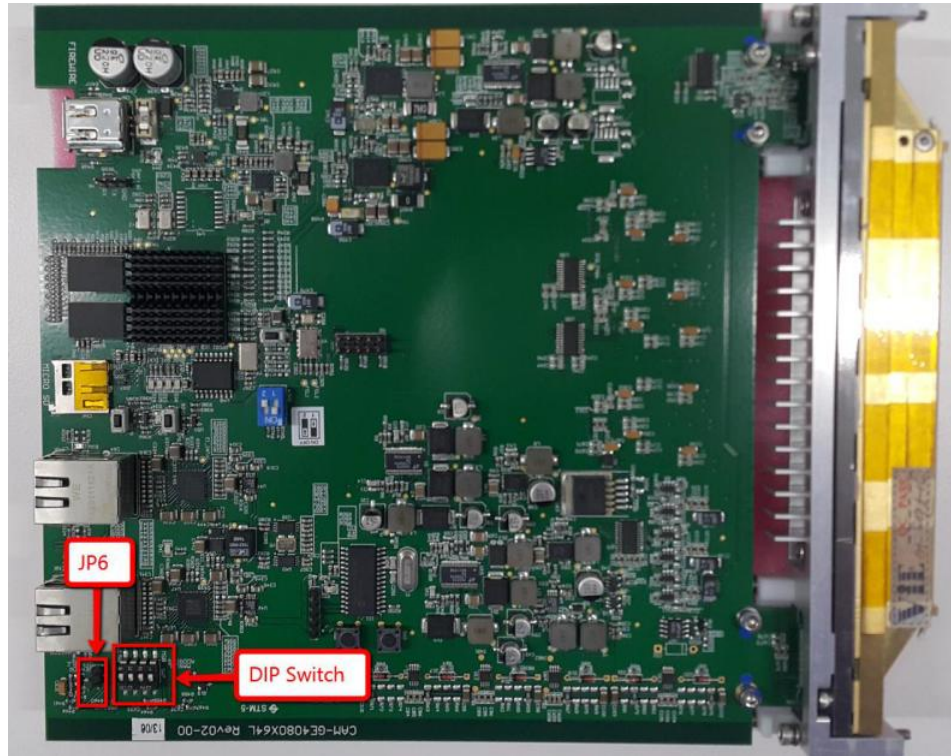




Figure 5 DIP Switch location

Camera 0	ON DIP				
	1	2	3	4	
Camera 1	ON DIP				
	1	2	3	4	
Camera 2	ON DIP				
	1	2	3	4	
Camera 3	ON DIP				
	1	2	3	4	
Camera 4	ON DIP				
	1	2	3	4	






Camera 5	ON DIP				
	1	2	3	4	
Camera 6	ON DIP				
	1	2	3	4	
Camera 7	ON DIP				
	1	2	3	4	
Camera 8	ON DIP				
	1	2	3	4	
Camera 9	ON DIP				
	1	2	3	4	
Camera 10	ON DIP				
	1	2	3	4	
Camera 11	ON DIP				
	1	2	3	4	
Camera 12	ON DIP				
	1	2	3	4	
Camera 13	ON DIP				
	1	2	3	4	

Table 1