

daveho hacks

Sheet: /HCount/

File: HCount.kicad\_sch

**Title: Horizontal count**

Size: USLetter

Date:

KiCad E.D.A. 8.0.3

Rev:

Id: 1/7



daveho hacks

Sheet: /VCount/

File: VCount.kicad\_sch


**Title: Vertical count**

Size: USLetter Date:

KiCad E.D.A. 8.0.3

Rev:

Id: 1/7

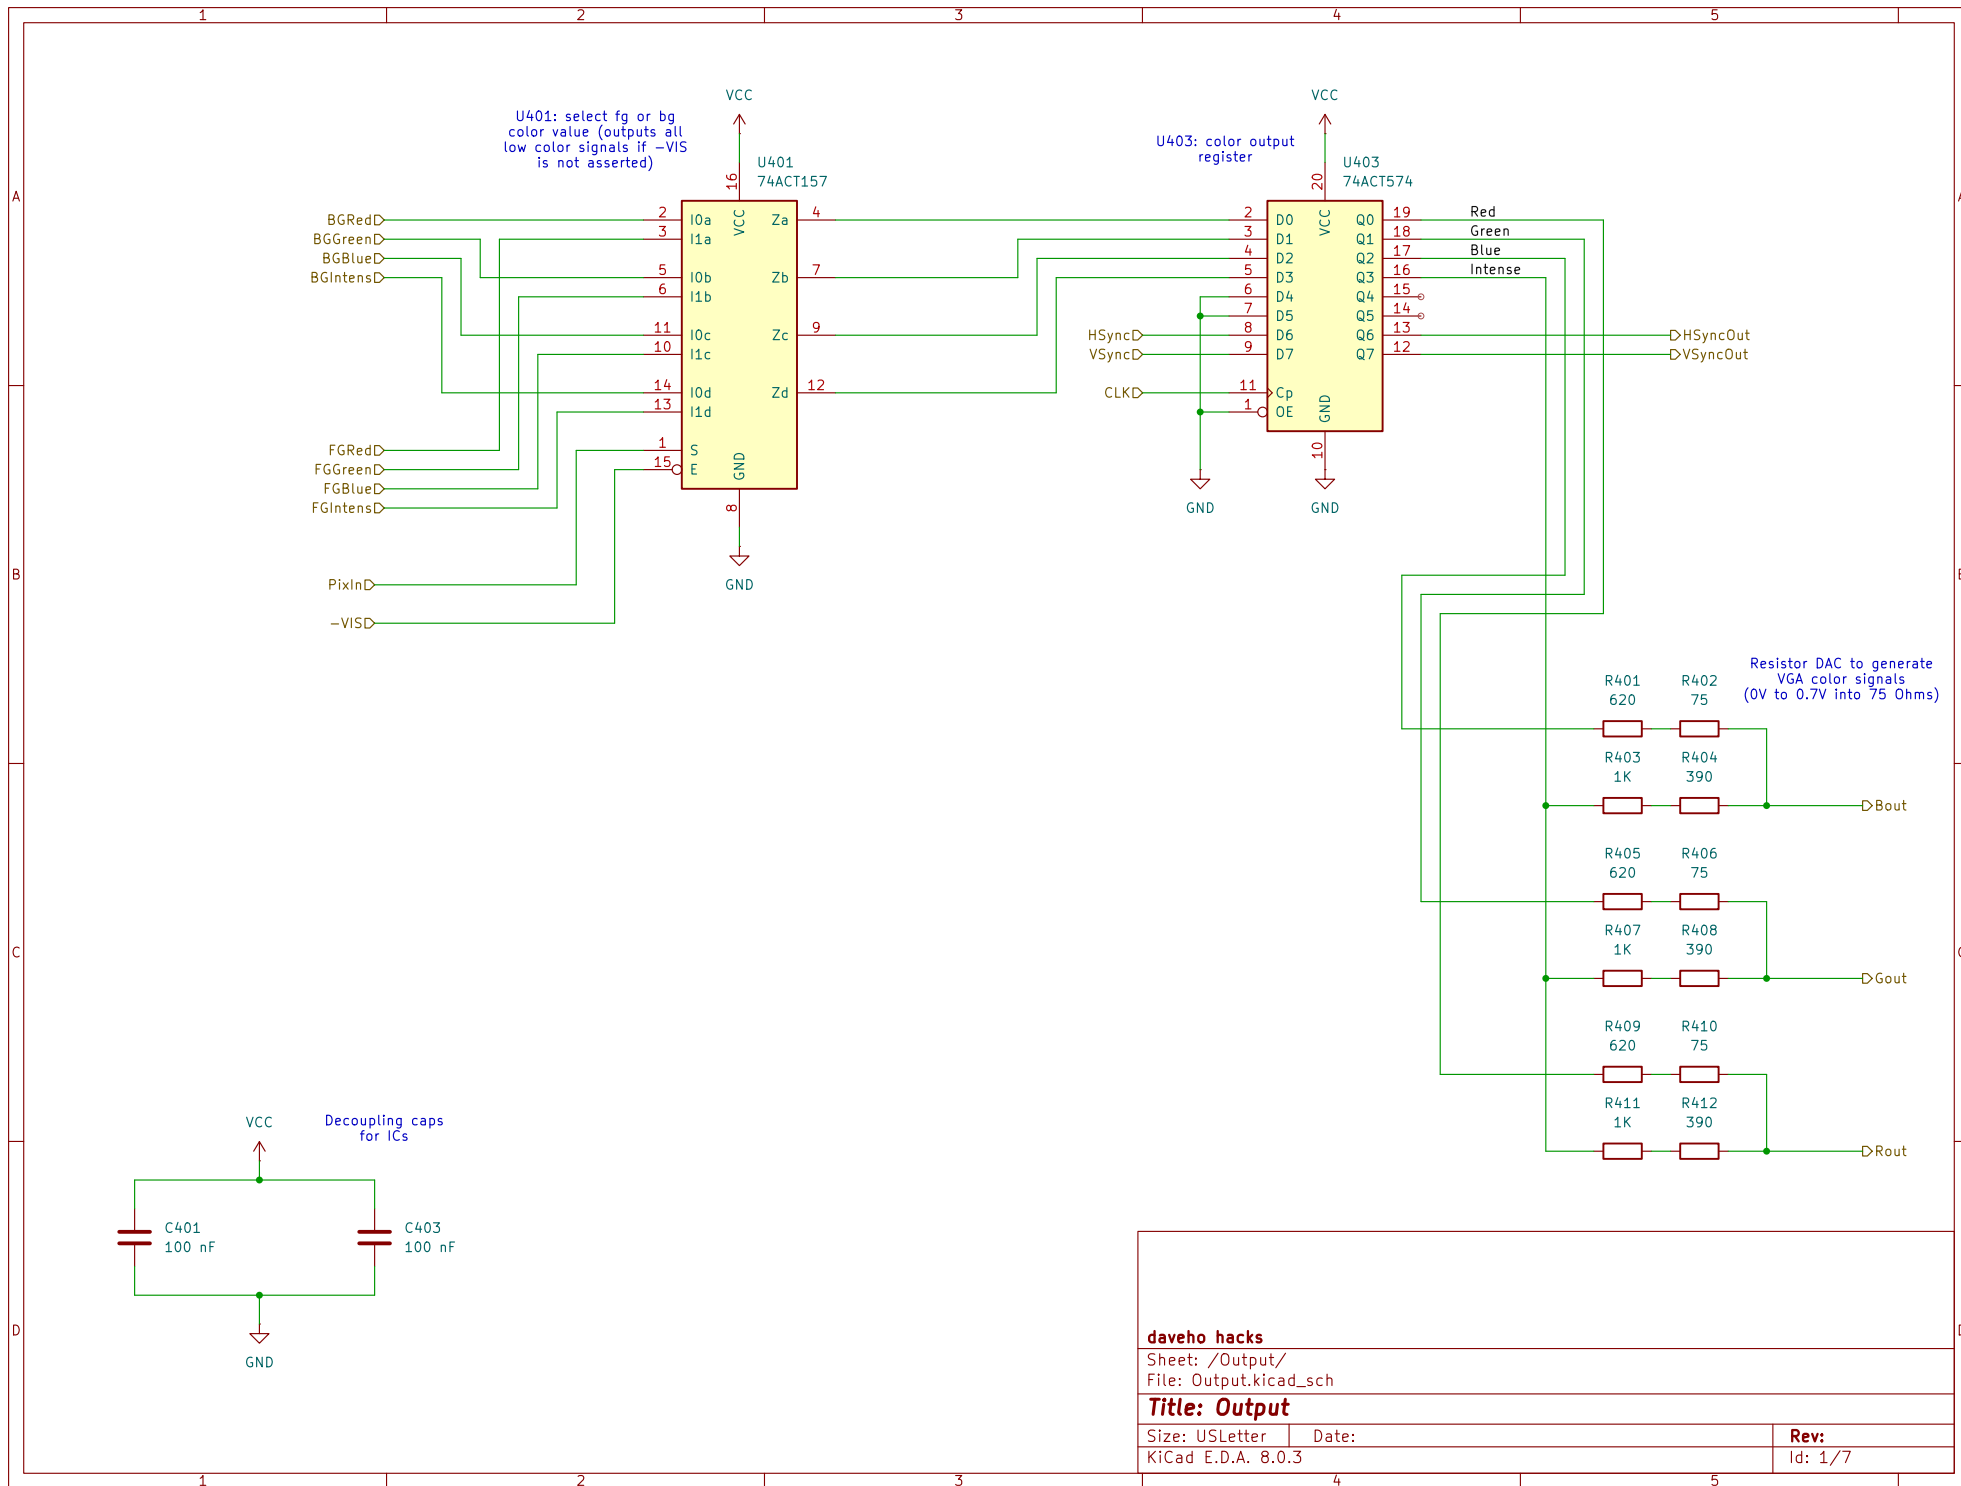

daveho hacks

Sheet: /Output/

File: Output.kicad\_sch


**Title: Output**

Size: USLetter Date:






KiCad E.D.A. 8.0.3

Rev:

Id: 1/7

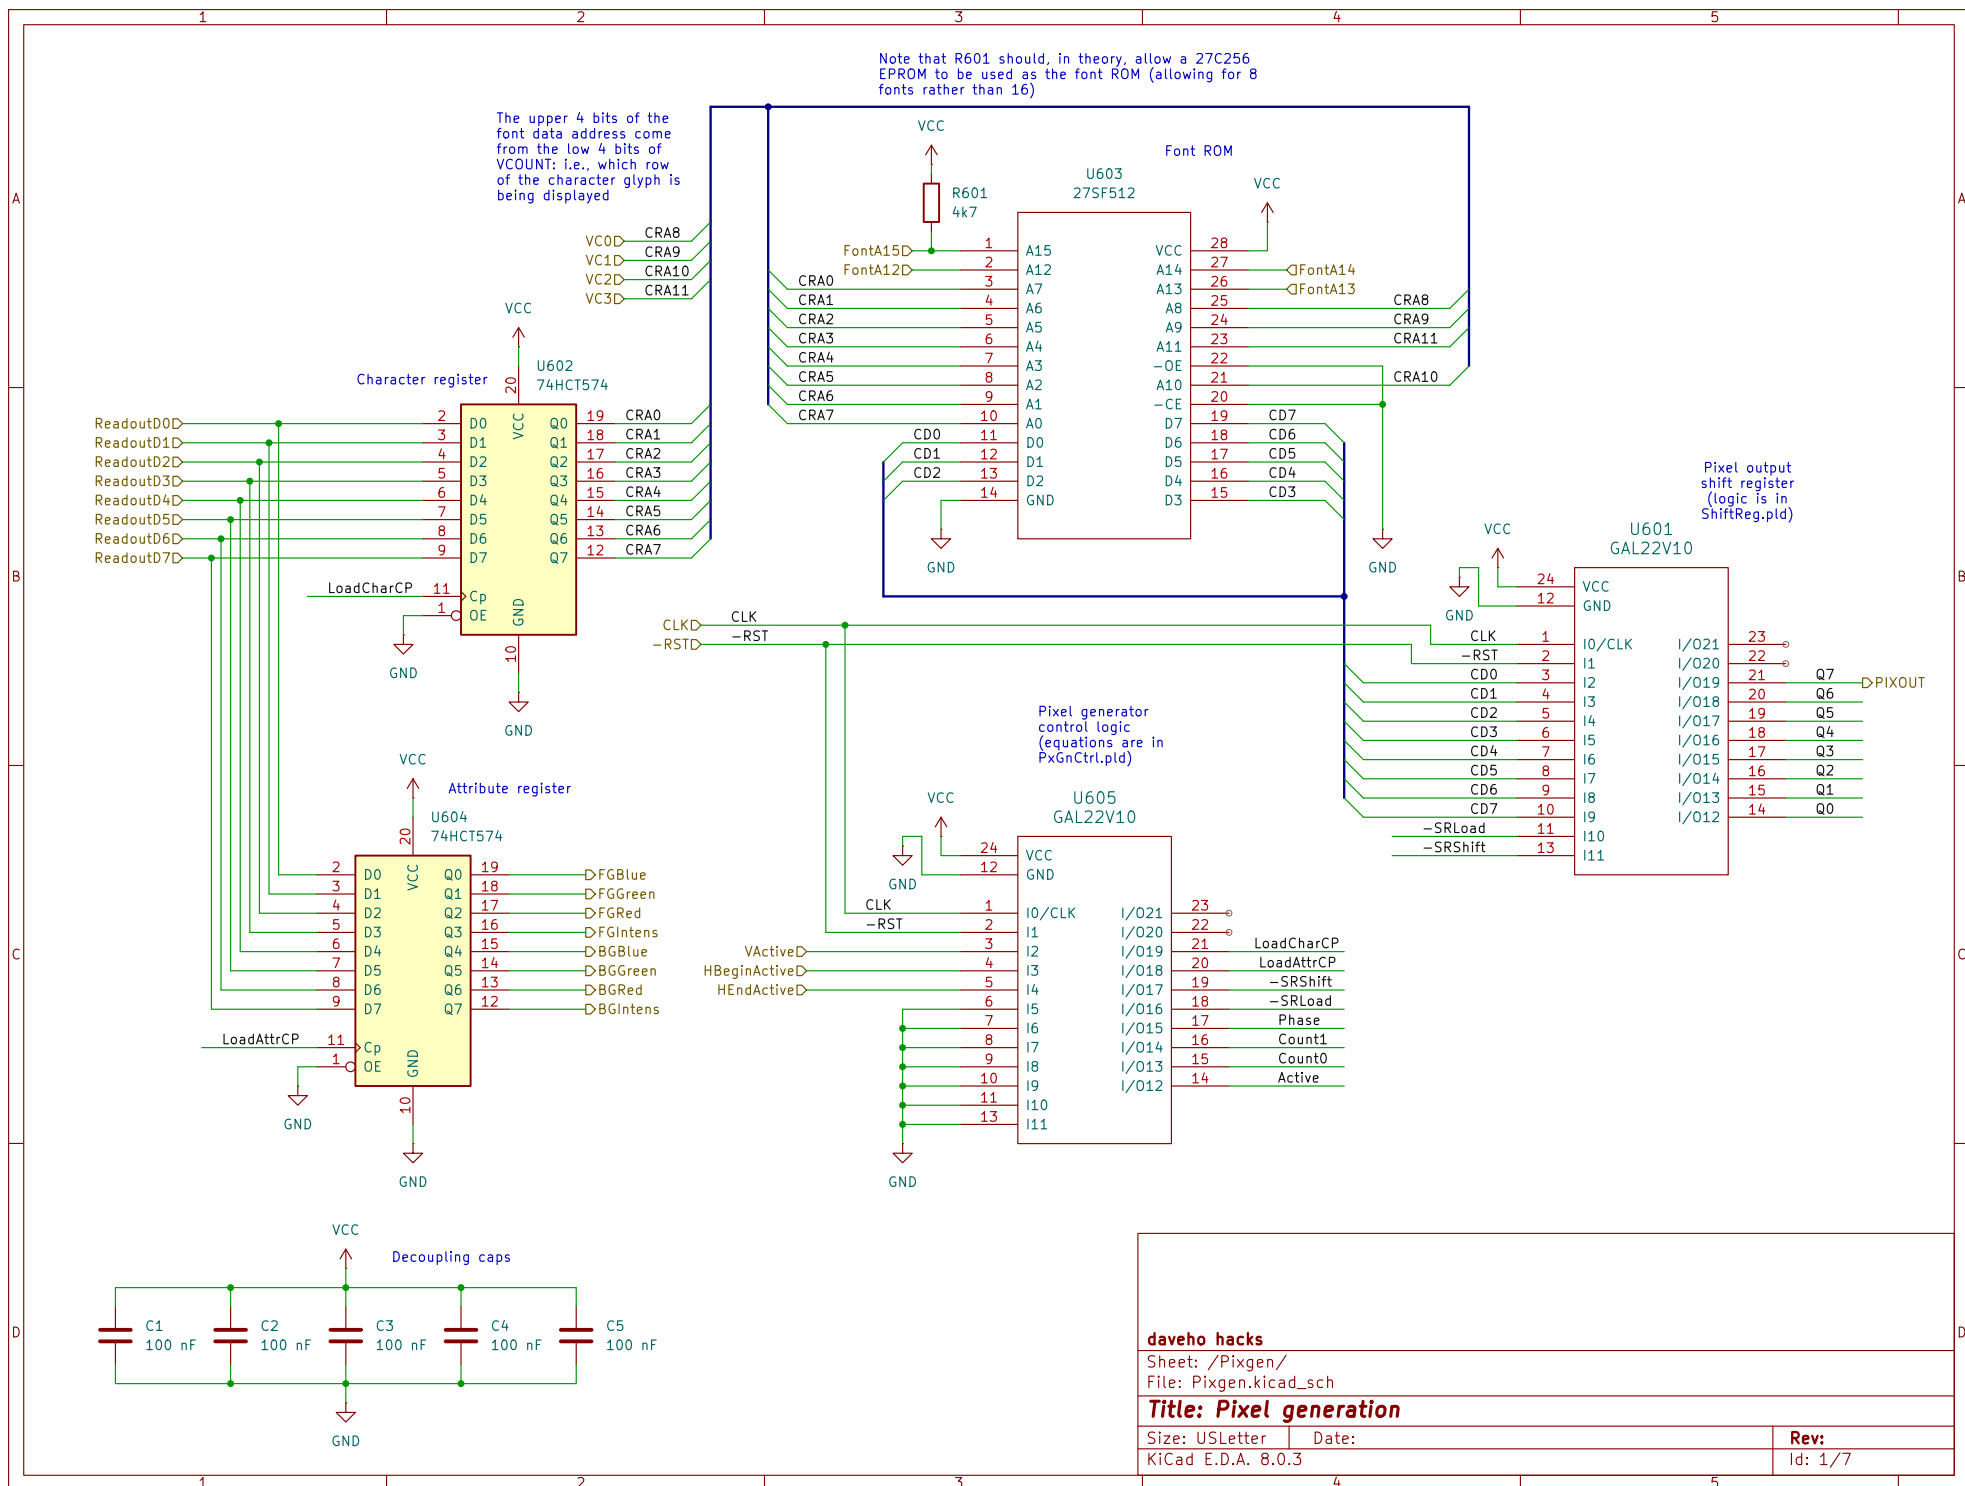


Logic is defined in  
R0utCtrl.pld

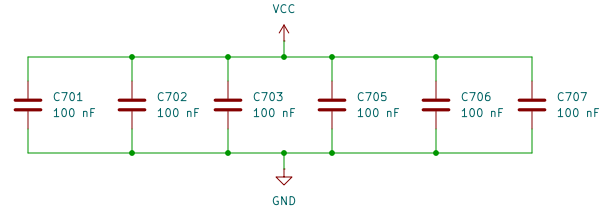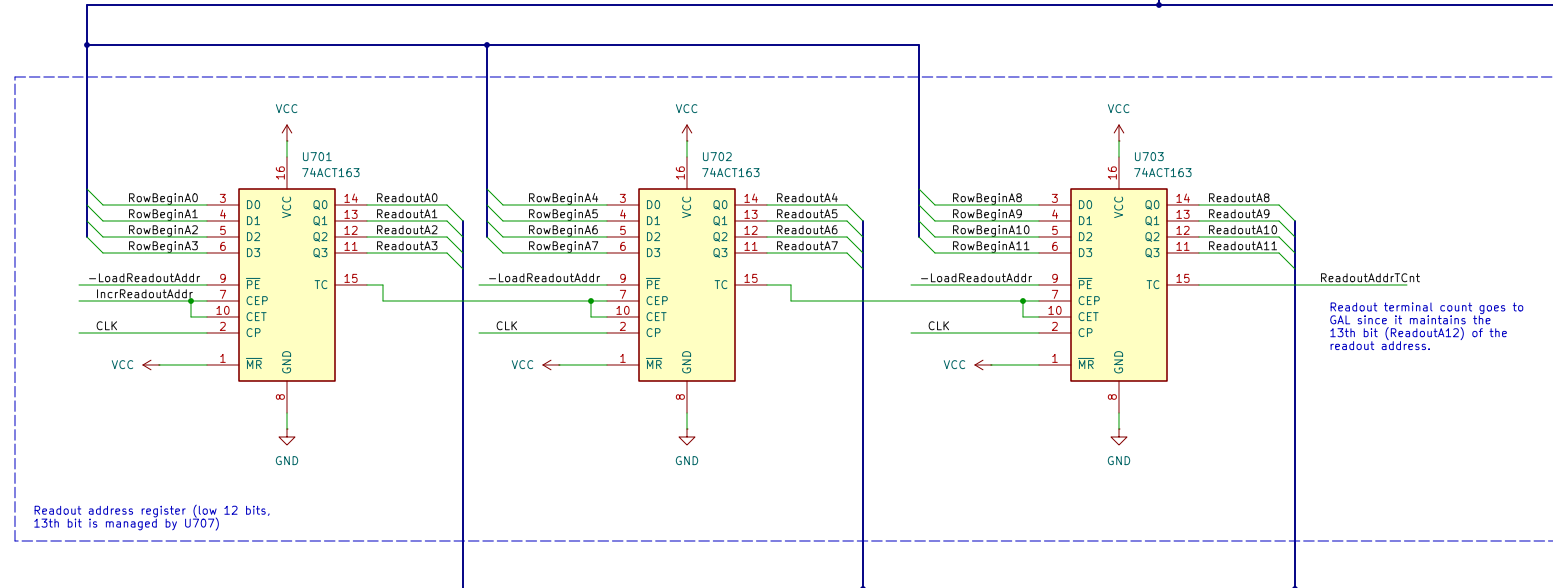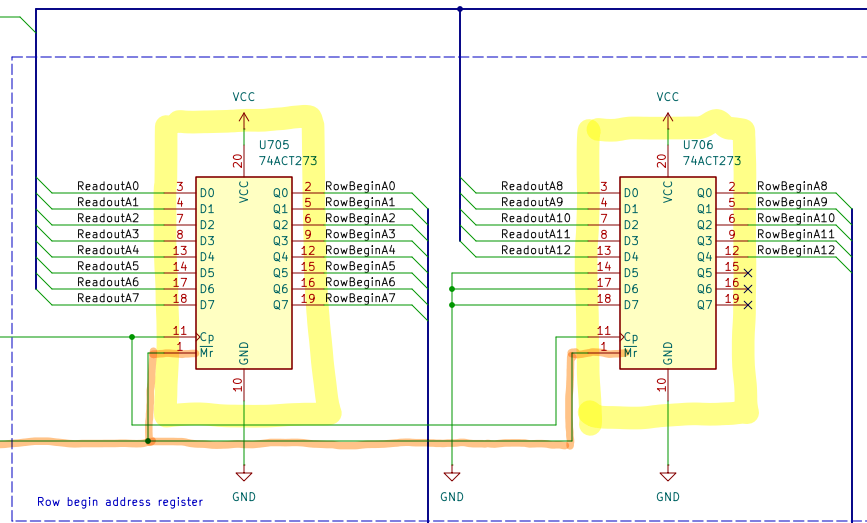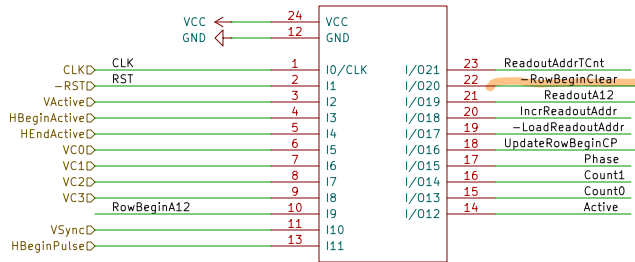

HostD0  
HostD1  
HostD2  
HostD3  
HostD4  
HostD5  
HostD6  
HostD7

Host can read and write video memory and can write the contents of the VRAM bank register

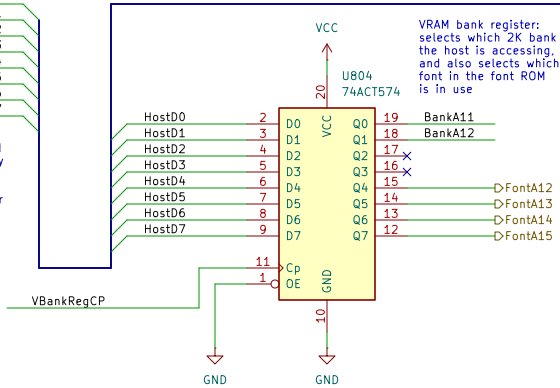


VRAM bank register: selects which 2K bank the host is accessing, and also selects which font in the font ROM is in use


Decode host control signals, generate control signals for VRAM and bank reg: logic is in VRAMCtrl.pld

HostA0D  
HostA1D  
HostA2D  
HostA3D  
HostA4D  
HostA5D  
HostA6D  
HostA7D  
HostA8D  
HostA9D  
HostA10D  
HostA11D  
HostA12D  
HostA13D  
HostA14D  
HostA15D

All host address lines are used because the VRAM hardware does its own address decoding (to know when video memory is being accessed by the host)

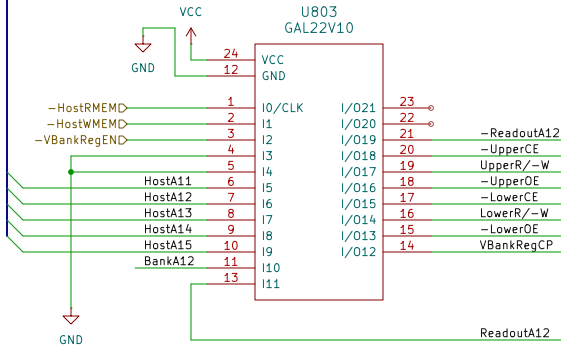

Note that the "inversion" of ReadoutA12 (generated by the control signal GAL) is used to select the high VRAM chip and enable its output.




The readout address signals select which byte of video memory the memory fetch hardware wants to access. ReadoutA12 (the highest address line) is used to select the lower or upper VRAM chip.

ReadoutA0D ReadoutA0  
ReadoutA1D ReadoutA1  
ReadoutA2D ReadoutA2  
ReadoutA3D ReadoutA3  
ReadoutA4D ReadoutA4  
ReadoutA5D ReadoutA5  
ReadoutA6D ReadoutA6  
ReadoutA7D ReadoutA7  
ReadoutA8D ReadoutA8  
ReadoutA9D ReadoutA9  
ReadoutA10D ReadoutA10  
ReadoutA11D ReadoutA11  
ReadoutA12D ReadoutA12

Data values read from VRAM (to be used for rasterization)


ReadoutD0  
ReadoutD1  
ReadoutD2  
ReadoutD3  
ReadoutD4  
ReadoutD5  
ReadoutD6  
ReadoutD7

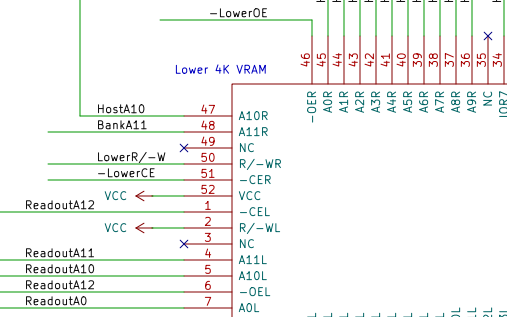

U801 IDT7134

IOR6  
IOR5  
IOR4  
IOR3  
IOR2  
IOR1  
IOR0  
GND  
NC  
IO7L  
IO6L  
IO5L  
IO4L

HostD6  
HostD5  
HostD4  
HostD3  
HostD2  
HostD1  
HostD0  
GND  
ReadoutD7  
ReadoutD6  
ReadoutD5  
ReadoutD4

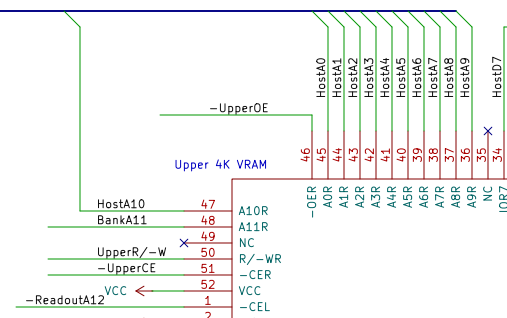

U802 IDT7134

IOR6  
IOR5  
IOR4  
IOR3  
IOR2  
IOR1  
IOR0  
GND  
NC  
IO7L  
IO6L  
IO5L  
IO4L

HostD6  
HostD5  
HostD4  
HostD3  
HostD2  
HostD1  
HostD0  
GND  
ReadoutD7  
ReadoutD6  
ReadoutD5  
ReadoutD4

daveho hacks

Sheet: /VRAM/  
File: VRAM.kicad\_sch

Title: VRAM

Size: User Date:  
KiCad E.D.A. 8.0.3

Rev:  
Id: 1/7