

# Technical Quotation



**Production Systems Automation**  
201 Clark Rd  
Duryea, Pennsylvania 18642  
USA

## TruLaser 1030 fiber (L94)

Quotation number: 00117308/1 from 05/31/2024  
valid to: 08/29/2024



All illustrations are examples. The product may differ from the picture.

### Regional Sales Manager

Mr James Rogowski  
Hyde Rd 111  
Farmington, CT 06032  
USA

Phone (860) 3845467  
E-mail james.rogowski@trumpf.com

### Sales Representative

Mr Chris Barsanti  
Flank Dr 6332  
Harrisburg, 17112  
USA

Mobile (610) 256-0711  
E-mail CBarsanti@midatlanticmachinery.com

### Product Manager

Mr Grant Fergusson  
111 Hyde Road  
Farmington, 06032  
USA

Phone 8605157858  
E-mail grant.fergusson@trumpf.com

# Technical Quotation



**Production Systems Automation  
201 Clark Rd  
Duryea, Pennsylvania 18642  
USA**

Dear Customer,

Thank you for your interest in TRUMPF technology! In response to your request we are pleased to provide the following quotation.

TRUMPF machines are designed to meet the increasing challenges facing today's manufacturers.

It is most important for us that you benefit from your TRUMPF machine every day and in every step you are using it. Using TRUMPF accessories and services is the key to attain the full potential of your new TRUMPF machine and will ensure a maximum uptime, low operating cost and maintain its high capital value. We bundle these products under the category TruServices. TRUMPF knows it is our duty to develop and continuously improve TruServices to ensure your competitive advantage for the whole time you use your machine. This is why we include superior services with your new machine such as our TRUMPF warranty, consumables, training, installation and data-driven services for monitoring an optimal performance.

As the largest laser manufacturer in the world, and the largest manufacturer of fabrication equipment in the United States, TRUMPF is positioned to offer innovative machines of very high reliability and quality. TRUMPF has been in business for over 100 years and spends approximately 10% of its revenues on research and develop programs that result in continued enhancements of existing products along with innovative new technologies to solve tomorrow's fabrication needs.

While our unique fabrication machines set themselves apart from our competitors' products through their design and productivity, the company also distinguishes itself through dedication to customer training and support. More than 3,000 students pass through our US customer training center each year, learning to program, to operate and maintain their TRUMPF products. We are also constantly optimizing our technical service group, keeping ahead of our install base. Our dedication to continuous innovation and customer support has helped the TRUMPF Group to exceed \$5.5 billion in sales worldwide.

If you have not already had the opportunity to experience our 435,000 square foot manufacturing facility in Farmington, CT, we would like to offer you a visit. Meeting the people of TRUMPF while getting a firsthand look at our facility, our products and our lean manufacturing operations will open your eyes to the TRUMPF philosophy. And if Connecticut is not your backyard our technology is also showcased in our SmartFactory in Chicago, IL and in our Technology Center in Costa Mesa, CA. Contact your local TRUMPF sales person to arrange a visit.

Thank you once again for considering TRUMPF!

Burke Doar  
Executive Vice President



## Table of contents

|                                                      |    |
|------------------------------------------------------|----|
| 1. Quotation.....                                    | 4  |
| 2. Terms and conditions.....                         | 20 |
| 3. Additional information about the order range..... | 31 |
| 4. Additional information on technical data.....     | 55 |

## 1. Quotation

| Pos  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Amount | Position price |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------|
| 1000 | <b>TruLaser 1030 fiber (L94)</b> <ul style="list-style-type: none"> <li>Machine                             <ul style="list-style-type: none"> <li>Working range: 3000 × 1500 mm</li> <li>Box frame</li> <li>Motion unit for high-precision processing</li> <li>Rack and pinion drive in combination with ball screw</li> <li>Process cooler for machine and laser (water/air)</li> <li>Work area illumination</li> <li>Pilot laser</li> <li>Automatic nozzle cleaning</li> <li>Integrated electrical cabinets</li> <li>Scrap drawers</li> <li>Closed beam guidance via laser light cable (LLK)</li> <li>Transport and installation device</li> <li>Power supply via the machine</li> </ul> </li> <li>TRUMPF laser                             <ul style="list-style-type: none"> <li>Excitation using pump diodes</li> <li>Laser power control</li> </ul> </li> <li>Cutting unit                             <ul style="list-style-type: none"> <li>Single cutting head strategy</li> <li>Universal cutting unit with adaptive lens system</li> <li>Protective glass</li> <li>Online condition checking of protective glass</li> <li>Automatic nozzle centering</li> </ul> </li> <li>Control                             <ul style="list-style-type: none"> <li>Quick post-production</li> <li>SINUMERIK control</li> <li>Integrated technology data</li> <li>Auto-shutdown</li> <li>Programmable cutting gas/pressure selection</li> <li>Microweld</li> <li>Remote support interface</li> <li>Production plan</li> <li>Multi-sheet processing</li> <li>Condition Guide</li> <li>18.5" widescreen multi-touch color display</li> </ul> </li> </ul> | 1 PCE  | 505,000.00 USD |

# Technical Quotation



- Cutting Guide
- Functions
  - AdjustLine
  - ControlLine
  - FastLine
  - FlyLine
  - FocusLine
  - NitroLine
  - PierceLine
  - PlasmaLine
  - Copper cutting package
  - Brass cutting package
- Data transmission
  - USB interface
  - RJ45 network interface
  - Central Link
  - Online Update Manager
- Safety
  - CE marking and EC Machinery Directive
  - Multi-chamber compact dust extractor
  - Machine cover with certified door viewing panel
- Advanced standard configuration
  - Mild steel rake (prong spacing 67 mm, replaceable prongs)
  - Loading station for 90 mm stack height
  - Mild steel rake (prong spacing 67 mm, replaceable prongs)
  - Finished part pallet

|             |                                    |              |                 |
|-------------|------------------------------------|--------------|-----------------|
| <b>2000</b> | <b>Standard TRUMPF TruServices</b> | <b>1 PCE</b> | <b>0.00 USD</b> |
|-------------|------------------------------------|--------------|-----------------|

**Warranty:**

One-Year, Unlimited Hours

**Training:**

2 students for a 4 day operator course at TRUMPF's facility in Farmington, CT


2 students for a 2 day advanced application training course at TRUMPF's facility in Farmington, CT

1 day of operators review after installation

**Transparency Agreement:**

Machine will be connected to our Condition Monitoring Platform including the following benefits:

# Technical Quotation



Data-driven diagnostics: Faster and more reliable problem solving based on machine data  
Detection and prevention of machine failures and unplanned downtimes  
Condition Report via MyTRUMPF: Machine performance data going back 7 days, so that you can analyze them and take the necessary steps to improve your operation  
Valid for five years

## Installation:


Installation, Start-up and Instruction

## Standard Acceptance:

Machine acceptance will consist of producing TRUMPF's standard acceptance part which checks all aspects of machine performance against quoted specifications. This acceptance test will be performed at the customer's location, if requested. Any additional tests must be mutually agreed upon and specified in the purchase order.


|       |                                                                                                                                                                                                                  |              |                        |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------|
| 3000  | <b>External solid-state laser TruDisk 4001 with one laser output</b>                                                                                                                                             | <b>1 PCE</b> | <b>50,000.00 USD</b>   |
|       | <ul style="list-style-type: none"><li>Includes BrightLine fiber and Highspeed cutting package</li></ul>                                                                                                          |              |                        |
| 4000  | <b>External solid-state laser TruDisk 6001 with one laser output</b>                                                                                                                                             | <b>1 PCE</b> | <b>150,000.00 USD</b>  |
|       | <ul style="list-style-type: none"><li>Includes BrightLine fiber and Highspeed cutting package</li></ul>                                                                                                          |              |                        |
| 5000  | <b>External solid-state laser TruDisk 10001 with one laser output</b>                                                                                                                                            | <b>1 PCE</b> | <b>350,000.00 USD</b>  |
|       | <ul style="list-style-type: none"><li>Includes BrightLine fiber and Highspeed cutting package</li></ul>                                                                                                          |              |                        |
| 6000  | <b>Power by the Hour program</b>                                                                                                                                                                                 | <b>1 PCE</b> | <b>-150,000.00 USD</b> |
| 7000  | <b>Sorting Guide</b>                                                                                                                                                                                             | <b>1 PCE</b> | <b>35,000.00 USD</b>   |
|       | <ul style="list-style-type: none"><li>Scope of delivery: IPC with software, camera and monitor</li><li>Functionality and detection precision depend on customer lighting (see installation conditions)</li></ul> |              |                        |
| 8000  | <b>Nozzle changer</b>                                                                                                                                                                                            | <b>1 PCE</b> | <b>25,000.00 USD</b>   |
|       | <ul style="list-style-type: none"><li>21 nozzle positions</li></ul>                                                                                                                                              |              |                        |
| 9000  | <b>DetectLine</b>                                                                                                                                                                                                | <b>1 PCE</b> | <b>12,000.00 USD</b>   |
|       | <ul style="list-style-type: none"><li>Precise sheet position detection (including automatic focal measurement)</li></ul>                                                                                         |              |                        |
| 10000 | <b>Drop&amp;Cut</b>                                                                                                                                                                                              | <b>1 PCE</b> | <b>6,000.00 USD</b>    |

# Technical Quotation




|       |                                                                                                                                                                                                                                                                                                                                                                             |              |                      |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------------|
|       | <ul style="list-style-type: none"> <li>Only in combination with integrated camera 1 or integrated cameras 1 and 2</li> </ul>                                                                                                                                                                                                                                                |              |                      |
| 11000 | <b>Integrated camera 1 for process viewing</b>                                                                                                                                                                                                                                                                                                                              | <b>1 PCE</b> | <b>4,000.00 USD</b>  |
|       | <ul style="list-style-type: none"> <li>View of the front section of the work area (about 2.5 m)</li> </ul>                                                                                                                                                                                                                                                                  |              |                      |
| 12000 | <b>Integrated camera 2 for process viewing</b>                                                                                                                                                                                                                                                                                                                              | <b>1 PCE</b> | <b>4,000.00 USD</b>  |
|       | <ul style="list-style-type: none"> <li>View of the remaining section of the work area (from 6 m format view up to 4.5 m)</li> <li>Only in combination with integrated camera 1</li> </ul>                                                                                                                                                                                   |              |                      |
| 13000 | <b>Smart Collision Prevention / Purchase</b>                                                                                                                                                                                                                                                                                                                                | <b>1 PCE</b> | <b>10,500.00 USD</b> |
|       | <ul style="list-style-type: none"> <li>Only in combination with TruTops Laser or TruTops Boost</li> <li>Unlimited time license</li> </ul>                                                                                                                                                                                                                                   |              |                      |
| 14000 | <b>Dot Matrix Code / Purchase</b>                                                                                                                                                                                                                                                                                                                                           | <b>1 PCE</b> | <b>3,000.00 USD</b>  |
|       | <ul style="list-style-type: none"> <li>Part identification with Dot Matrix Code</li> <li>Additional function: rapid and simple application of free text with minimal programming effort</li> <li>Requirement TruLaser: TruTops Boost version 8 or above</li> <li>Requirement TruLaser Tube: Programming Tube version 1 or higher</li> <li>Unlimited time license</li> </ul> |              |                      |
| 15000 | <b>Highspeed Eco cutting package</b>                                                                                                                                                                                                                                                                                                                                        | <b>1 PCE</b> | <b>0.00 USD</b>      |
|       | <ul style="list-style-type: none"> <li>High-speed cutting with low gas consumption</li> </ul>                                                                                                                                                                                                                                                                               |              |                      |
| 16000 | <b>CoolLine with water container</b>                                                                                                                                                                                                                                                                                                                                        | <b>1 PCE</b> | <b>15,000.00 USD</b> |
|       | <ul style="list-style-type: none"> <li>Water supply is done using a water container</li> </ul>                                                                                                                                                                                                                                                                              |              |                      |
| 17000 | <b>Titanium cutting package</b>                                                                                                                                                                                                                                                                                                                                             | <b>1 PCE</b> | <b>5,000.00 USD</b>  |
|       | <ul style="list-style-type: none"> <li>Includes cutting data N2 and argon</li> <li>Contains additional cutting gas connection</li> <li>Includes compact dust extractor with fire suppression</li> </ul>                                                                                                                                                                     |              |                      |
| 18000 | <b>Compressed-air cutting</b>                                                                                                                                                                                                                                                                                                                                               | <b>1 PCE</b> | <b>0.00 USD</b>      |
| 19000 | <b>Additional cutting gas connection</b>                                                                                                                                                                                                                                                                                                                                    | <b>1 PCE</b> | <b>4,500.00 USD</b>  |
| 20000 | <b>EdgeLine Bevel / Purchase</b>                                                                                                                                                                                                                                                                                                                                            | <b>1 PCE</b> | <b>25,000.00 USD</b> |
|       | <ul style="list-style-type: none"> <li>Unlimited time license</li> </ul>                                                                                                                                                                                                                                                                                                    |              |                      |
| 21000 | <b>Clamps (2x for one pallet)</b>                                                                                                                                                                                                                                                                                                                                           | <b>1 PCE</b> | <b>1,000.00 USD</b>  |
| 22000 | <b>Clamps (4x for two pallets)</b>                                                                                                                                                                                                                                                                                                                                          | <b>1 PCE</b> | <b>2,000.00 USD</b>  |

# Technical Quotation



|       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |                      |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------------|
| 23000 | <b>Partitioned slag drawers</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>1 PCE</b> | <b>2,000.00 USD</b>  |
| 24000 | <b>CO2 extinguisher system for compact dust extractor</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>1 PCE</b> | <b>12,000.00 USD</b> |
| 25000 | <b>Slats made of mild steel</b> <ul style="list-style-type: none"> <li>Slat spacing of 33.5 mm for the safe processing of parts as small as 30 x 80 mm</li> <li>Slat spacing 33.5 mm recommended for SortMaster</li> </ul>                                                                                                                                                                                                                                                                                                                         | <b>1 PCE</b> | <b>0.00 USD</b>      |
| 26000 | <b>Machine status light</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>1 PCE</b> | <b>0.00 USD</b>      |
| 27000 | <b>Spraying equipment</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>1 PCE</b> | <b>0.00 USD</b>      |
| 28000 | <b>Fully automatic pallet changer (with light barrier)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>1 PCE</b> | <b>0.00 USD</b>      |
| 29000 | <b>Price reduction for exclusion of compact dust extractor</b> <ul style="list-style-type: none"> <li>Delivery of the machine without TRUMPF suction system.</li> <li>A suction system must be installed in accordance with the document "Requirement for a customer-provided suction system".</li> <li>Compliance is confirmed by returning the signed checklist.</li> <li>The document "Requirement for a customer-provided suction system" is enclosed with the offer.</li> <li>An EU declaration of conformity is issued by TRUMPF.</li> </ul> | <b>1 PCE</b> | <b>-5,000.00 USD</b> |
| 30000 | <b>MobileControl app</b> <ul style="list-style-type: none"> <li>Requirement: Wireless Operation Point</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>1 PCE</b> | <b>2,500.00 USD</b>  |
| 31000 | <b>Wireless Operation Point</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>1 PCE</b> | <b>2,500.00 USD</b>  |
| 32000 | <b>Additional 10-m LLK extension between the laser and machine</b> <ul style="list-style-type: none"> <li>TruFiber 3001: Max. additional 10 m</li> <li>TruFiber 4000: Max. additional 20 m</li> <li>From TruDisk 6001 on: Maximum additional 10 m</li> </ul>                                                                                                                                                                                                                                                                                       | <b>1 PCE</b> | <b>5,000.00 USD</b>  |
| 33000 | <b>Mezzanine version of machine</b> <ul style="list-style-type: none"> <li>Mezzanine structure not included</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>1 PCE</b> | <b>10,000.00 USD</b> |
| 34000 | <b>Machine special installation</b> <ul style="list-style-type: none"> <li>Special layout required</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>1 PCE</b> | <b>5,000.00 USD</b>  |
| 35000 | <b>Cutting package for thick sheets</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>1 PCE</b> | <b>0.00 USD</b>      |

# Technical Quotation




|       |                                                                                                                                                                                                                                                                                                                                                                  |       |               |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------|
| 36000 | <b>LiftMaster Compact retrofit capability</b>                                                                                                                                                                                                                                                                                                                    | 1 PCE | 0.00 USD      |
|       | <ul style="list-style-type: none"> <li>• With extended pallet removal unit</li> <li>• Retrofit capability for three years after delivery of machine</li> </ul>                                                                                                                                                                                                   |       |               |
| 37000 | <b>Heavy duty compact dust extractor</b>                                                                                                                                                                                                                                                                                                                         | 1 PCE | 2,500.00 USD  |
|       | <ul style="list-style-type: none"> <li>• Enhanced performance of the compact dust extractor for special customer requirements such as poor material quality or a particularly high machine utilization rate</li> </ul>                                                                                                                                           |       |               |
| 38000 | <b>Prefilter for gases nitrogen and oxygen</b>                                                                                                                                                                                                                                                                                                                   | 1 PCE | 2,000.00 USD  |
|       | <ul style="list-style-type: none"> <li>• Filtering of particles in nitrogen and oxygen gas lines as prefilter Filter element outside of the machine</li> </ul>                                                                                                                                                                                                   |       |               |
| 39000 | <b>TruTool TSC 100 (3A1) USA</b>                                                                                                                                                                                                                                                                                                                                 | 1 PCE | 7,481.00 USD  |
|       | <b>Automation</b>                                                                                                                                                                                                                                                                                                                                                |       |               |
| 40000 | <b>LoadMaster 1530</b>                                                                                                                                                                                                                                                                                                                                           | 1 PCE | 79,000.00 USD |
|       | <ul style="list-style-type: none"> <li>• Basic unit                             <ul style="list-style-type: none"> <li>• Type 1530: sheet sizes/thicknesses 3048 x 1524 mm / loading 25 mm</li> </ul> </li> <li>• Loading                             <ul style="list-style-type: none"> <li>• Loading station</li> <li>• Fanning magnets</li> </ul> </li> </ul> |       |               |
| 41000 | <b>Peeling unit</b>                                                                                                                                                                                                                                                                                                                                              | 1 PCE | 0.00 USD      |
| 42000 | <b>Installation on opposite side from electrical cabinet</b>                                                                                                                                                                                                                                                                                                     | 1 PCE | 0.00 USD      |
| 43000 | <b>Second light barrier circuit</b>                                                                                                                                                                                                                                                                                                                              | 1 PCE | 0.00 USD      |
|       | <ul style="list-style-type: none"> <li>• Necessary if the safety area is interrupted by a wall or similar obstruction</li> <li>• Acknowledgement occurs together with the first light barrier circuit</li> </ul>                                                                                                                                                 |       |               |
| 44000 | <b>Front loading cart B1</b>                                                                                                                                                                                                                                                                                                                                     | 1 PCE | 45,000.00 USD |
|       | <ul style="list-style-type: none"> <li>• With fanning magnets and manual cart control</li> <li>• Loading station (340959) removed from standard scope of delivery</li> </ul>                                                                                                                                                                                     |       |               |
| 45000 | <b>Front dual loading cart B1</b>                                                                                                                                                                                                                                                                                                                                | 1 PCE | 90,000.00 USD |
|       | <ul style="list-style-type: none"> <li>• Includes storage interface, fanning magnets, operating panel and manual cart control</li> </ul>                                                                                                                                                                                                                         |       |               |

# Technical Quotation



|       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |       |                |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------|
|       | <ul style="list-style-type: none"> <li>Loading station (340959) removed from standard scope of delivery</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                      |       |                |
| 46000 | <b>Travel rails, embedded</b> <ul style="list-style-type: none"> <li>Recess depth: 45 mm</li> <li>Price per running meter of a pair of rails</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                 | 1 m   | 0.00 USD       |
| 47000 | <b>LiftMaster 1530 (AL35)</b> <ul style="list-style-type: none"> <li>Basic unit                             <ul style="list-style-type: none"> <li>Type 1530: sheet sizes/thicknesses 3048 x 1524 mm / loading 25 mm / unloading 25 mm</li> <li>Symmetrical installation with loading on the left or right</li> </ul> </li> <li>Loading                             <ul style="list-style-type: none"> <li>Double sheet detection</li> <li>Suction frame</li> <li>Peeling unit</li> <li>Separation of thin sheet</li> </ul> </li> </ul> | 1 PCE | 210,000.00 USD |
| 48000 | <b>Loading station</b> <ul style="list-style-type: none"> <li>For stack heights of up to 200 mm</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                              | 1 PCE | 0.00 USD       |
| 49000 | <b>Unloading platform</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1 PCE | 0.00 USD       |
| 50000 | <b>Rake with belt prongs for low-scratch, positioning accurate unloading (prong spacing 67 mm)</b> <ul style="list-style-type: none"> <li>Available up to sheet thickness s = 15 mm</li> <li>Extra charge</li> <li>Mild steel rake (prong spacing 67 mm) from standard scope of delivery not required</li> </ul>                                                                                                                                                                                                                        | 1 PCE | 20,000.00 USD  |
| 51000 | <b>Rake with belt prongs for low-scratch, position accurate unloading (prong spacing 33.5 mm)</b> <ul style="list-style-type: none"> <li>Available up to sheet thickness s = 15 mm</li> <li>Extra charge</li> <li>Mild steel rake (prong spacing 67 mm) from standard scope of delivery not required</li> </ul>                                                                                                                                                                                                                         | 1 PCE | 30,000.00 USD  |
| 52000 | <b>Pallet handling enhancement (including four longitudinal side grippers)</b> <ul style="list-style-type: none"> <li>Requirement for automated auxiliary pallet operation</li> <li>With LiftMaster Compact, auxiliary pallet handling is only possible in combination with a storage system</li> </ul>                                                                                                                                                                                                                                 | 1 PCE | 0.00 USD       |
| 53000 | <b>Part separation from 600 × 600 mm</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1 PCE | 20,000.00 USD  |

# Technical Quotation




|       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |              |                       |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------|
| 54000 | <b>Supplementary suction frame</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 55000 | <b>Integrated sheet alignment</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 56000 | <b>Symmetrical installation with loading on the right</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 57000 | <b>Third position</b> <ul style="list-style-type: none"> <li>Necessary if loading and unloading do not take place in the same position</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 58000 | <b>Base for LiftMaster</b> <ul style="list-style-type: none"> <li>Design according to layout</li> <li>Necessary for storage connection with dual cart</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 59000 | <b>Additional operating panel</b> <ul style="list-style-type: none"> <li>Additional, button-based control unit for acknowledging the light barrier circuit and controlling the cart system (if present)</li> <li>Enables access from another location</li> </ul>                                                                                                                                                                                                                                                                                                                    | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 60000 | <b>Second light barrier circuit</b> <ul style="list-style-type: none"> <li>Necessary if the safety area is interrupted by a wall or similar obstruction</li> <li>Acknowledgement occurs together with the first light barrier circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                    | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 61000 | <b>Third light barrier circuit</b> <ul style="list-style-type: none"> <li>Necessary if the safety area is interrupted by a wall or similar obstruction</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 62000 | <b>Storage interface</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>1 PCE</b> | <b>0.00 USD</b>       |
| 63000 | <b>LiftMaster Compact 1530 (AL34)</b> <ul style="list-style-type: none"> <li>Basic unit <ul style="list-style-type: none"> <li>Type 1530: sheet sizes/thicknesses 3048 x 1524 mm / loading 25 mm / unloading 25 mm</li> <li>Two gantry stations</li> <li>Extended pallet removal unit</li> <li>Storage interface</li> <li>Touch start post</li> </ul> </li> <li>Loading <ul style="list-style-type: none"> <li>Double sheet detection</li> <li>Synchronous loader including separation of thin sheet</li> <li>Peeling unit</li> <li>Cleaning brush for slats</li> </ul> </li> </ul> | <b>1 PCE</b> | <b>218,000.00 USD</b> |

# Technical Quotation



|       |                                                                                                                                                                                                                            |       |               |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------|
| 64000 | <b>Thin sheet handling</b>                                                                                                                                                                                                 | 1 PCE | 15,000.00 USD |
|       | <ul style="list-style-type: none"> <li>Mark-free depositing of sheet metal onto slats</li> <li>Available for sheet thicknesses <math>s = 0.4 - 2.0</math> mm</li> </ul>                                                    |       |               |
| 65000 | <b>Load station for expanded stack height</b>                                                                                                                                                                              | 1 PCE | 23,000.00 USD |
|       | <ul style="list-style-type: none"> <li>For stack heights of up to 300 mm</li> <li>Loading station from standard scope of delivery not required</li> </ul>                                                                  |       |               |
| 66000 | <b>Loading station for expanded stack height in TruStore 3030</b>                                                                                                                                                          | 1 PCE | 23,000.00 USD |
|       | <ul style="list-style-type: none"> <li>For stack heights of up to 260 mm</li> <li>Loading station from standard scope of delivery not required</li> </ul>                                                                  |       |               |
| 67000 | <b>Unloading platform</b>                                                                                                                                                                                                  | 1 PCE | 0.00 USD      |
| 68000 | <b>Rake with belt prongs for low-scratch, positioning accurate unloading (prong spacing 67 mm)</b>                                                                                                                         | 1 PCE | 20,000.00 USD |
|       | <ul style="list-style-type: none"> <li>Available up to sheet thickness <math>s = 15</math> mm</li> <li>Extra charge</li> <li>Mild steel rake (prong spacing 67 mm) from standard scope of delivery not required</li> </ul> |       |               |
| 69000 | <b>Rake with belt prongs for low-scratch, position accurate unloading (prong spacing 33.5 mm)</b>                                                                                                                          | 1 PCE | 30,000.00 USD |
|       | <ul style="list-style-type: none"> <li>Available up to sheet thickness <math>s = 15</math> mm</li> <li>Extra charge</li> <li>Mild steel rake (prong spacing 67 mm) from standard scope of delivery not required</li> </ul> |       |               |
| 70000 | <b>PartMaster</b>                                                                                                                                                                                                          | 1 PCE | 76,000.00 USD |
|       | <ul style="list-style-type: none"> <li>Available up to sheet thickness <math>s = 12.7</math> mm</li> <li>Includes scrap container under the part chute</li> </ul>                                                          |       |               |
| 71000 | <b>PartMaster at a gantry station</b>                                                                                                                                                                                      | 1 PCE | 96,000.00 USD |
|       | <ul style="list-style-type: none"> <li>Available up to sheet thickness <math>s = 12.7</math> mm</li> </ul>                                                                                                                 |       |               |
| 72000 | <b>PartMaster integration TruStore</b>                                                                                                                                                                                     | 1 PCE | 76,000.00 USD |
|       | <ul style="list-style-type: none"> <li>Includes PartMaster (2464203), specific storage compartment extension and pallet handling extension (including 4 long-sided grippers) (2464205)</li> </ul>                          |       |               |
| 73000 | <b>Additional finished part pallet</b>                                                                                                                                                                                     | 1 PCE | 5,000.00 USD  |
| 74000 | <b>Part separation from <math>150 \times 150</math> mm</b>                                                                                                                                                                 | 1 PCE | 50,000.00 USD |
|       | <ul style="list-style-type: none"> <li>Available up to sheet thickness <math>s = 8</math> mm</li> <li>Includes sensor system for separation checking</li> </ul>                                                            |       |               |

# Technical Quotation



- When used with LiftMaster Compact, the scrap skeletons must be deposited separately from the finished parts

**75000      Linear version      1 PCE      37,000.00 USD**

- Includes linear axis for movable unloading rake and an additional gantry station

**76000      Standing electrical cabinet      1 PCE      8,000.00 USD**

- Is required if it is not possible to mount the control cabinet to the gantry station
- Includes rack for electrical cabinet and cable sets

## Automation Carts

**77000      Loading cart      1 PCE      45,000.00 USD**

- Contains cart interface
- For automation with format 1530: At least 9 m rail length is recommended, maximum 3 t carrying capacity
- For automation with format 2040: At least 11 m rail length is recommended, maximum 5 t carrying capacity
- For automation with formats 2060/2560: At least 15 m rail length is recommended, maximum 10 t carrying capacity

**78000      Unloading cart      1 PCE      45,000.00 USD**

- Contains cart interface
- For automation with format 1530: At least 9 m rail length is recommended, maximum 3 t carrying capacity
- For automation with format 2040: At least 11 m rail length is recommended, maximum 5 t carrying capacity
- For automation with formats 2060/2560: At least 15 m rail length is recommended, maximum 10 t carrying capacity

**79000      Dual loading cart      1 PCE      90,000.00 USD**

- Contains cart interface
- For automation with format 1530: At least 9 m rail length is recommended, maximum 3 t carrying capacity
- For automation with format 2040: At least 11 m rail length is recommended, maximum 5 t carrying capacity
- For automation with formats 2060/2560: At least 15 m rail length is recommended, maximum 10 t carrying capacity

**80000      Double unloading cart      1 PCE      90,000.00 USD**

- Contains cart interface
- For automation with format 1530: At least 9 m rail length is recommended, maximum 3 t carrying capacity
- For automation with format 2040: At least 11 m rail length is recommended, maximum 5 t carrying capacity

# Technical Quotation



recommended, maximum 5 t carrying capacity

- For automation with formats 2060/2560: At least 15 m rail length is recommended, maximum 10 t carrying capacity

|              |                                        |              |                      |
|--------------|----------------------------------------|--------------|----------------------|
| <b>81000</b> | <b>Double loading / unloading cart</b> | <b>1 PCE</b> | <b>90,000.00 USD</b> |
|--------------|----------------------------------------|--------------|----------------------|

- Dual cart with top cart for unloading and bottom cart for loading
- With cart interface
- For automation with format 1530: At least 9 m rail length is recommended, maximum 3 t carrying capacity
- For automation with format 2040: At least 11 m rail length is recommended, maximum 5 t carrying capacity
- For automation with formats 2060/2560: At least 15 m rail length is recommended, maximum 10 t carrying capacity

|              |                                      |            |                 |
|--------------|--------------------------------------|------------|-----------------|
| <b>82000</b> | <b>Travel rails, surface-mounted</b> | <b>1 m</b> | <b>0.00 USD</b> |
|--------------|--------------------------------------|------------|-----------------|

- Price per running meter of a pair of rails

|              |                               |            |                 |
|--------------|-------------------------------|------------|-----------------|
| <b>83000</b> | <b>Travel rails, embedded</b> | <b>1 m</b> | <b>0.00 USD</b> |
|--------------|-------------------------------|------------|-----------------|

- Recess depth: 45 mm
- Price per running meter of a pair of rails

|              |                                                                         |              |                      |
|--------------|-------------------------------------------------------------------------|--------------|----------------------|
| <b>84000</b> | <b>Front loading cart (with scissor lift) for expanded stack height</b> | <b>1 PCE</b> | <b>50,000.00 USD</b> |
|--------------|-------------------------------------------------------------------------|--------------|----------------------|

- For automation with format 1530: 300 mm stack height at 3 t carrying capacity
- For automation with format 2040: 300 mm stack height at 5 t carrying capacity
- Loading station (340959) removed from standard scope of delivery

## TRUMPF TruServices

|              |                                         |              |                      |
|--------------|-----------------------------------------|--------------|----------------------|
| <b>85000</b> | <b>Extended Warranty + 2 PM Mission</b> | <b>1 PCE</b> | <b>50,000.00 USD</b> |
|--------------|-----------------------------------------|--------------|----------------------|

Warranty extension with 2 preventative maintenance missions per year. (1 year max)

|              |                                                |              |                     |
|--------------|------------------------------------------------|--------------|---------------------|
| <b>86000</b> | <b>Additional Preventive Maintenance visit</b> | <b>1 PCE</b> | <b>8,000.00 USD</b> |
|--------------|------------------------------------------------|--------------|---------------------|

|              |                                 |              |                   |
|--------------|---------------------------------|--------------|-------------------|
| <b>87000</b> | <b>Service Agreement Remote</b> | <b>1 PCE</b> | <b>750.00 USD</b> |
|--------------|---------------------------------|--------------|-------------------|

Includes technical remote support provided by an in-house service technician. Unlimited use of TRUMPF Visual Assistance on Smart Glasses or any mobile device. Technical Guides are available upon use of Service App.

Condition Monitoring: option, which identifies anomalies using

# Technical Quotation



machine data analysis, includes:

- Proactive expert contact by phone
- Proactive recommendations for action by mail or service app
- Proactive problem solving by TRUMPF service technicians

Condition Monitoring recommended for compatible machines at an additional fee.

|              |                                      |              |                      |
|--------------|--------------------------------------|--------------|----------------------|
| <b>88000</b> | <b>Service Agreement Maintenance</b> | <b>1 PCE</b> | <b>17,000.00 USD</b> |
|--------------|--------------------------------------|--------------|----------------------|

Includes 2 preventative maintenance missions per year for TruLaser, TruPunch, TruMatic, TruLaser Tube, TruLaser Center and 1 preventative maintenance mission per year for TruBend , a 10% discount on consumables, 10% discount on replacement parts and 24/7 technical remote support via phone or TRUMPF Visual Assistance platform (4 add. years max)

Condition Monitoring required for compatible machines for an additional fee.

Customer can opt out of condition monitoring.

|              |                                                               |              |                      |
|--------------|---------------------------------------------------------------|--------------|----------------------|
| <b>89000</b> | <b>Service Agreement Maintenance + Onsite Repair Coverage</b> | <b>1 PCE</b> | <b>29,000.00 USD</b> |
|--------------|---------------------------------------------------------------|--------------|----------------------|

Includes benefits of Maintenance Service Agreement and unlimited repair missions.

Condition Monitoring: option, which identifies anomalies using machine data analysis, includes:

- Proactive expert contact by phone
- Proactive recommendations for action by mail or service app
- Proactive problem solving by TRUMPF service technicians

Condition Monitoring recommended for compatible machines at an additional fee.

|              |                                      |              |                      |
|--------------|--------------------------------------|--------------|----------------------|
| <b>90000</b> | <b>Service Agreement Performance</b> | <b>1 PCE</b> | <b>50,000.00 USD</b> |
|--------------|--------------------------------------|--------------|----------------------|

Error correction by telephone • Remote support: Online remote diagnostics and error correction • Technical Guides • Regular maintenance performed to specifications of the maintenance checklist  
• Service missions for repairs • Service Parts for repairs (4 add. years

# Technical Quotation



max, 3 add. years after Warranty Extension)

Condition Monitoring: option, which identifies anomalies using machine data analysis, includes:

- Proactive expert contact by phone
- Proactive recommendations for action by mail or service app
- Proactive problem solving by TRUMPF service technicians

Condition Monitoring recommended for compatible machines at an additional fee.


|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                       |              |                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|--------------|----------------------|
| <b>91000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Smart Glasses</b>                                  | <b>1 PCE</b> | <b>2,750.00 USD</b>  |
| <p>We also encourage you to take advantage of our Augmented Reality technology (ART) that provides a virtual means of supporting you faster and more practical in an industrial environment. Instead of waiting for a technician in case of a machine incident, you will receive instructions via smart glasses, so that you can perform a repair quicker yourself. Therefore, we included unlimited augmented reality sessions in all of our service agreements.<br/>(Hardware only, but must be purchased with an Agreement)</p> |                                                       |              |                      |
| <b>92000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Operator Training, at TRUMPF in Farmington, CT</b> | <b>1 PCE</b> | <b>2,500.00 USD</b>  |
| <b>93000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Advanced apps training 2days a TRUMPF</b>          | <b>1 PCE</b> | <b>1,600.00 USD</b>  |
| <b>94000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Sheetmetal Design Class, 3 days @ TRUMPF</b>       | <b>1 PCE</b> | <b>4,000.00 USD</b>  |
| <p>1 seat included, \$3,500 per additional seat<br/>In this course, your employees will learn how to streamline the design process and make full use of sheet metal knowledge to design better parts and replace and/or make improvements to current manufacturing</p>                                                                                                                                                                                                                                                             |                                                       |              |                      |
| <b>95000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>2D Laser Applications Boot Camp</b>                | <b>1 PCE</b> | <b>5,000.00 USD</b>  |
| <p>2 days @ Customer Site (incl. travel and lodging costs)<br/>Customers will receive the following benefits from this training course:<br/>Increase programmer and operator knowledge of machine functions and capabilities. Boost overall machine productivity Improve cut part quality.</p>                                                                                                                                                                                                                                     |                                                       |              |                      |
| <b>96000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Maintenance Training at Customer (+exp.)</b>       | <b>1 PCE</b> | <b>10,000.00 USD</b> |

# Technical Quotation



|        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |       |               |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------|
| 97000  | <b>Laser Maintenance Level 1</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1 PCE | 3,200.00 USD  |
| 98000  | <b>Yearly Consumable Parts Standard Kit</b><br>Standard Ceramics (4 pce)<br>Protective Glass D34 (15 pce) - lower wattage OR<br>Protective Glass D30 (25 pce) - 8kW and higher<br>EAA nozzles (11pks any size)                                                                                                                                                                                                                                                                                                                                                                                      | 1 PCE | 2,915.00 USD  |
| 99000  | <b>Slim Nozzles Add-on</b><br>For specific cutting processes, we offer additional packages of nozzles that can only be purchased in addition to the standard package<br>Type of Material   Diameter [mm]   Quantity   EAB (Slim Nozzle) 0.8 5<br>EAB (Slim Nozzle) 1.0 5 EAB (Slim Nozzle) 1.2 5 EAB (Slim Nozzle) 1.4 5 EAB (Slim Nozzle) 1.7 5 EAB (Slim Nozzle) 2.0 5<br><br>EAB (Slim Nozzle) 2.3 5 EAB (Slim Nozzle) 2.7 5 Select 5 pcs of any size Each pack incl. 5 nozzles<br>EAB (Slim): The slim nozzle allows for closer nesting on the sheet metal thereby saving up to 10% on material | 1 PCE | 321.00 USD    |
| 100000 | <b>BrightLine Add-on</b><br>5 pieces of any size BrightLine nozzles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1 PCE | 432.00 USD    |
| 101000 | <b>CoolLine Add-on</b><br>7 pieces of any size CoolLine nozzles & 1 universal ceramic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1 PCE | 1,121.00 USD  |
| 102000 | <b>Highspeed Eco Add-On</b><br>1 High Speed Eco EAV nozzle<br>2 packs of EAV inserts<br>2 packs of EAV sleeves                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1 PCE | 787.00 USD    |
| 103000 | <b>Oseon Analytics (Complete Package - US Standard) - Valid for new SOFTWARE customer only</b><br><ul style="list-style-type: none"> <li>• One user license</li> <li>• Implementation of one TRUMPF machine</li> <li>• Software maintenance for 12 months (for new software customer only) or alignment the software maintenance with the current license(s) (existing software customer)</li> </ul>                                                                                                                                                                                                | 1 PCE | 8,500.00 USD  |
| 104000 | <b>TruTops Boost Software bundle (Standalone Machine) - Valid for new TruTops Boost customer only</b><br><br>All in-one design and programming solution that works consistently from 3D modeling to NC generation across different technologies.                                                                                                                                                                                                                                                                                                                                                    | 1 PCE | 22,800.00 USD |

# Technical Quotation



The integrated software offers connected intelligence for the ideal interaction between software and machine.

- One TruTops Boost core (floating license) including one Machine Package
- Training seat for one student
- Software maintenance contract for a 12-month period
- Telephone & remote support and software updates

|               |                                                                                                         |              |                      |
|---------------|---------------------------------------------------------------------------------------------------------|--------------|----------------------|
| <b>105000</b> | <b>TruTops Boost Software bundle (Machine w/Automation) - Valid for new TruTops Boost customer only</b> | <b>1 PCE</b> | <b>24,300.00 USD</b> |
|---------------|---------------------------------------------------------------------------------------------------------|--------------|----------------------|

All in-one design and programming solution that works consistently from 3D modeling to NC generation across different technologies. The integrated software offers connected intelligence for the ideal interaction between software and machine.

- One TruTops Boost core (floating license) including one Machine Package
- Training seat for one student
- Software maintenance contract for a 12-month period
- Telephone & remote support and software updates

|               |                                                                                                                                     |              |                     |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|
| <b>106000</b> | <b>TruTops Boost Standard Machine Package - Existing TruTops Boost license(s) as well as valid software maintenance is required</b> | <b>1 PCE</b> | <b>5,500.00 USD</b> |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|

This option permits programming of the existing machine model quoted. Training not included

|               |                                                                                                                                       |              |                     |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|
| <b>107000</b> | <b>TruTops Boost Automation Machine Package - Existing TruTops Boost license(s) as well as valid software maintenance is required</b> | <b>1 PCE</b> | <b>7,000.00 USD</b> |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|

This option permits programming of the existing machine model quoted. Training not included

|               |                                                                                                                                                  |              |                      |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------------|
| <b>108000</b> | <b>Additional core (floating license) of TruTops Boost - Existing TruTops Boost license(s) as well as valid software maintenance is required</b> | <b>1 PCE</b> | <b>11,000.00 USD</b> |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------------|

Machine package(s) from the first core included. Current Software maintenance contract required / follows first core validity. Training not included

|               |                                                                                                                                      |              |                     |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|
| <b>109000</b> | <b>Data Exchange Package for 3D CAD models - Existing TruTops Boost license(s) as well as valid software maintenance is required</b> | <b>1 PCE</b> | <b>2,700.00 USD</b> |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|

Read and write: VDA-FS (VDA), Parasolid (X\_T, X\_B, XMT\_TXT, XMT\_BIN) Read: Inventor (IPT, IAM), NX (PRT), Pro/E (PRT, ASM, XPR, XAS), SolidEdge (par, psm, asm), Solidworks (SLDPRT, SLDASM)

# Technical Quotation



|               |                                                                                                                                                                                                                                               |              |                     |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|
| <b>110000</b> | <b>Assembly Importer - Existing TruTops Boost license(s) as well as valid software maintenance is required</b>                                                                                                                                | <b>1 PCE</b> | <b>2,700.00 USD</b> |
|               | Automated dissolving of assemblies in single parts in all supported file formats and automatic transfer into HomeZone (parts management)                                                                                                      |              |                     |
| <b>111000</b> | <b>Interface Package Catia V5 - Existing TruTops Boost license(s) as well as valid software maintenance is required</b>                                                                                                                       | <b>1 PCE</b> | <b>4,500.00 USD</b> |
|               | Supports direct import and export of the file format CATIA V5 (MODEL, EXP, CATpart, CATproduct, CGR)                                                                                                                                          |              |                     |
| <b>112000</b> | <b>TruTops Boost Programming Training</b>                                                                                                                                                                                                     | <b>1 PCE</b> | <b>2,800.00 USD</b> |
| <b>113000</b> | <b>TruTops Boost Design Programming (webinar)</b>                                                                                                                                                                                             | <b>1 PCE</b> | <b>2,400.00 USD</b> |
|               | This course is designed for customers who wish to learn design in TruTops Boost without having to travel to TRUMPF. The goal of the course is to provide students with the core knowledge and skills to successfully draw 2D or 3D parts.     |              |                     |
| <b>114000</b> | <b>TRUMPF Flux - Subscription software (yearly)</b>                                                                                                                                                                                           | <b>1 PCE</b> | <b>6,000.00 USD</b> |
|               | <ul style="list-style-type: none"> <li>- One user license of TRUMPF Flux</li> <li>- One machine package for that machine</li> <li>- E-learning (expire with the license)</li> <li>- Software maintenance (expire with the license)</li> </ul> |              |                     |
| <b>115000</b> | <b>Either switch from TruTops Classic to Boost or Metamotion software</b>                                                                                                                                                                     | <b>1 PCE</b> | <b>0.00 USD</b>     |
|               | Please contact softwaresales@trumpf.com or ask your Sales Representative how to receive beneficial switch-over (update) pricing from TruTops Classic to TruTops Boost, as well as Metamotion software quote                                   |              |                     |

**If a service agreement is included:** Service agreement will start after the warranty period of the machine expires.

## 2. Terms and conditions

### Terms of payment

#### Payment Terms:

20% deposit due with purchase order  
40% prior to shipment  
40% Net 10 days from Installation Completion

#### **TRUMPF, INC. TERMS AND CONDITIONS OF SALE FOR MACHINE TOOL EQUIPMENT AND AUTOMATION**

This Agreement governs the sale of commercial off-the-shelf and commercial items products from Seller's product lines (hereinafter referred to as "Goods" or "Equipment"). Seller makes all quotations and accepts orders for such Goods/Equipment only on the terms and conditions stated herein ("Terms of Sale"):

#### **1. ORDER ACCEPTANCE:**

All orders are subject to acceptance only at Seller's facility in Farmington, Connecticut. These Terms of Sale shall be deemed accepted by Buyer upon Seller's receipt of Purchase Order from Buyer. No condition stated by Buyer shall be binding upon Seller if in conflict with, inconsistent with or in addition to the Terms of Sale, unless expressly accepted in a writing signed by Seller. In the event of conflict or differences in the terms or conditions of Buyer's Purchase Order and the Terms of Sale herein, the Terms of Sale shall govern.

#### **2. PRICES:**

All prices are: (a) Seller's current prices and are subject to change without notice at any time prior to acceptance of Buyer's order; (b) subject to all federal, state and local taxes upon the production, sale or shipment of the Goods sold hereunder, now or hereafter becoming effective, and if not included in the invoice, such amount may be invoiced later, and Buyer shall pay all such taxes.

#### **3. SHIPMENTS:**

**(A)** Domestic: All orders are FCA Seller's plant in Farmington, Connecticut (or such warehousing facilities as Seller may establish) Incoterms 2020.

**(B)** International: All prices are in US Dollars and are, at Seller's election, FCA Farmington CT (or other warehousing facilities as Seller may establish) or DPU Port of Entry Incoterms 2020.

**(C)** All freight charges, insurance premiums, duties and taxes are the responsibility of the Buyer.

#### 4. PAYMENT:

All payment terms are subject to Seller's approval of Buyer's credit.

**(A)** Machines shipping into US or Canada: 20% deposit with purchase order, 40% prior to shipment, 40% Net 10 Days from Installation Completion. Title to the Goods shall pass to the Buyer only upon receipt of final and full payment of the Goods by Supplier, from Buyer.

**(B)** Machines shipping into Mexico: 20% deposit with purchase order, 80% paid prior to shipment. Title to the Goods shall pass to the Buyer only upon receipt of final and full payment of the Goods by Supplier, from Buyer.

#### 5. DELIVERY:

The scheduled shipment date is an estimate and is subject to filling prior orders and delays caused by strikes, accidents, shortages, acts of civil authority or other causes beyond Seller's control. Buyer's acceptance of delivery time from the shipper shall constitute a waiver of any claim for delay.

#### 6. INSTALLATION AND PRODUCT ACCEPTANCE:

##### 6A. Preparation of Installation Site:

Upon acceptance by Seller of any Purchase Order hereunder, Seller shall provide Buyer with a Pre-Installation Manual setting out requirements for site preparation at the installation site. Buyer is responsible for preparing the installation site as set out in the Pre-Installation Manual, for providing all utilities within rated parameters as stated in the Pre-Installation Manual, and for inspecting, rigging and placement of the Goods at the installation site.

##### 6B. Inspection Upon Delivery:

Upon arrival of the Goods at the installation site, the Goods shall be inspected for shortages and damage in transit by authorized personnel of both Seller and Buyer. Buyer shall notify Seller in writing of any such claims within ten (10) days after Buyer discovers or should reasonably have discovered facts upon which the claim is based, but in no event more than thirty (30) days after Installation Completion under subsection C below. Failure of the Buyer to give written notice of a claim within the time-period or in the form specified above shall be deemed to be a waiver of such claim. If any repairs are made by unauthorized personnel, Seller reserves the right to withhold warranty support and to charge Buyer per then current time and material rates for services provided if Seller determines that the root cause of a defect requiring service was caused by a third-party vendor supplied product or service.

## **6C. Acceptance**

### **Testing and Acceptance:**

Notwithstanding prior inspection or testing, payment, or passage of title, all Goods shall be subject to final acceptance testing ("Final Acceptance Testing") after installation at the installation site to validate performance against Seller's quoted Technical Specifications. Final Acceptance Testing will be performed by Seller's operator and consist of (i) Seller's standard acceptance-test procedure which checks all aspects of Goods performance against Seller's quoted Technical Specification and (ii) any additional tests that are mutually agreed upon and specified in the purchase order or statement of work referencing these Terms and Conditions. Upon successful completion of the Final Acceptance Testing, the Goods shall be accepted, and Buyer shall sign and deliver to Seller the Seller's acceptance certificate ("Installation Completion").

Notwithstanding the foregoing, the Goods including any software shall be deemed accepted and the written acceptance form certifying Installation Completion shall be deemed executed by Buyer upon the earlier of either of the following two conditions; (x) in the event the Goods are placed into production by Buyer at the Installation Site; or (y) no later than 3 months after the date of delivery as determined by the terms of shipment.

**7. EQUIPMENT WARRANTY:** Except as otherwise provided in this Section 7, any Goods sold hereunder which (1) at the Installation Site, (2) have been properly installed and maintained by authorized persons, and (3) have been operated within the limits of rated and normal usage, are warranted to conform to Seller's quoted Technical Specifications and to be free of defects in material and workmanship, as determined by Seller's inspection, for a period of one year, or any purchased extended period, coming into effect upon Installation Completion. The terms of this warranty do not apply to any Goods which have a life, under normal usages, that is inherently less than one year. Product demonstrations, test parts, time studies, production estimates and other such particulars furnished to Buyer are only Seller's estimate and do not create a warranty. Within the warranty period, Seller will repair or replace without cost to Buyer any product or parts covered by the warranty which Seller finds to be defective in material or workmanship, provided that the Buyer gives the Seller prompt notice. This shall be the sole and exclusive remedy of the Buyer under this warranty. If Buyer licenses Applications Software to be delivered with Equipment at time of installation, at the end of the Applications Software warranty period Buyer shall receive a free of charge Software Service Agreement for the balance of the Equipment Warranty period.

To facilitate efficient warranty services delivery, Seller may in its sole discretion deliver to the Installation Site a variety of spare parts such as are reasonably believed to be of potential use in completing the Services (such spare parts, together with those parts removed for replacement during Warranty Services, being collectively "Seller's Property.") Buyer will cooperate with Seller in maintaining Seller's Property in a secure location segregated from Buyer's Equipment and Inventory during Services and in providing access during normal business hours for delivery and pick up. Seller is solely responsible for the packaging and cost of shipment of Seller's Property to and from Buyer's Installation Site. Should Buyer elect to retain any of the unused Spare Parts after close of Warranty Services mission, Buyer will be billed for such Parts at a discount of 5% off Seller's List Price as of the date of retention.

Services under this warranty are provided during normal business hours and using standard freight delivery. Services and delivery may be otherwise provided dependent upon availability and will be invoiced at TRUMPF Service rates in accordance with TRUMPF Service policies and practices, which are incorporated by reference herein.

Seller shall not be liable under any warranty or other obligation if the alleged defect in the Goods does not exist or the defect or defective performance is caused in whole or in part by Buyer's or any third party's misuse, neglect, modifications or additions, the use of non-TRUMPF spare parts or consumables, unauthorized attempts to repair, or by accident or other hazard outside Seller's control. Use of a non-TRUMPF spare part shall void the warranty if the TRUMPF spare part is available under the warranty free of charge. The warranty described herein is granted only to the original purchaser of the Goods and original purchaser's specified end-user and is non-transferrable.

**DISCLAIMER OF OTHER WARRANTIES: THE WARRANTY DESCRIBED IN THIS SECTION 7 IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE EXCLUDED.**

## **8. DATA SERVICES:**

Seller's Equipment is self-monitoring and software may collect certain equipment data recording performance metrics of the Equipment during Buyer's use of the Equipment which can be transmitted to Seller in real time via Seller's secure Cloud Connect services portal as set forth in the technical documentation of the Equipment. Cloud Connect services are activated during installation.

Buyers of Equipment utilizing Cloud Connect may receive expanded applications capabilities or enhanced Cloud Connect notification and technician scheduling throughout the Equipment warranty period and during any period in which the Buyer maintains a Seller Service Agreement providing for such notification and reporting services. Seller uses the data collected for delivery of Goods and Services under warranty and service agreements, and in product research and development. Buyer agrees that such data may be transmitted, processed, and used by TRUMPF as set forth herein.

Buyer can opt out of active machine monitoring by following the procedures set forth in the Software and Operator Manuals. Should Buyer exercise this opt out option, it may not receive Cloud Connect enhanced services, may experience limitations on machine functions or systems integrations that rely on information processed through Cloud Connect or automated data communications, or may be subject to surcharges and increased costs.

Data collected via Cloud Connect may include metadata, logs or other information generated by the operation of the Equipment or Embedded Software, in automated logs or similar records through the normal operation of the Equipment. In some cases, and within additional services, NC programs, technology tables, environmental, technology and operation data may also be collected. All data is secured with the same level of care Seller provides for its own confidential information, but in no event less than reasonable care. Some features in Seller software may enable collection of data from users of Buyer's applications that access or use the software. If Buyer uses these features to enable data collection in its application, Buyer is solely responsible for compliance with any applicable law, including obtaining any requisite user consent and maintaining a prominent privacy policy that accurately informs users about how it uses, collects, and shares data.

Seller reserves the right to add and remove services from Cloud Connect offerings at Seller's sole discretion. CLOUD CONNECT SERVICES ARE PROVIDED 'AS IS' WITH NO REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION: 1) ANY WARRANTY CONCERNING THE AVAILABILITY, ACCURACY OR CONTENT OF THE INFORMATION, OR 2) ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## **9. WORKPLACE SAFETY, INDEMNIFICATIONS:**

### **9A. Product Liability:**

With respect to all Goods or materials provided under this Agreement that are Seller's standard product or made to Seller's design or specifications, Seller shall, subject to the limitations of liability governing this Agreement, defend and indemnify Buyer against all third-party claims and liability required to be paid by Buyer to the extent arising out of defective materials, workmanship or design by Seller.

- 9B. Infringement/Malware:** Seller shall engage in commercially reasonable efforts to monitor the Goods supplied hereunder for infringement of third-party intellectual property and the presence of viruses or other malicious code. TRUMPF represents that (i) the Goods are not known to infringe, violate or misappropriate any intellectual property right(s) of third parties; (ii) that TRUMPF has all of the rights, permits, licenses and authority known to be necessary to perform its obligations hereunder; and (iii) the Goods, including any software and the media it is delivered on, have been scanned for and been found to be free from viruses and other malicious code. Seller shall, subject to the limitations of liability governing this Agreement, defend and indemnify Buyer against all third-party claims and liability required to be paid by Buyer to the extent arising out of Seller's negligence or malfeasance in monitoring the Goods as provided herein or in making the foregoing representations.
- 9C. Workplace Practices:** It is the responsibility of Buyer to know, understand and comply with the work and safety laws and regulations in effect and governing Buyer's use of the Goods provided hereunder. Buyer agrees that after installation of the Goods provided hereunder, the Goods and all persons other than Seller personnel operating or maintaining such Goods will be deemed under Buyer's exclusive control. To the extent governing law requires inspections, reviews, records keeping and/or after-purchase modifications to the Goods, it is the responsibility of the Buyer to arrange for and comply with such requirements and any associated costs are the sole responsibility of the Buyer. Subject to the limitation of liability governing this Agreement, Buyer shall indemnify Seller against all third-party claims and liability required to be paid by Seller to the extent arising out of (a) any modifications, including but not limited to repairs, made in the Goods by or on behalf of Buyer by persons or parties other than Seller, and/or (b) the Buyer's negligent use of the Goods, including but not limited to use in production with any of the Product safety functions disabled, obstructed or circumvented.
- 9D. Notice; Consent to Settlement:** It is a condition of indemnification or defense under this Section 9 that in the event that any third party asserts a claim or liability with respect to any matter for which a Party is entitled to indemnification hereunder, the indemnified Party gives prompt written notice to the indemnifying Party of such claim or liability. No settlement of an indemnified claim shall require an admission of liability or impose an affirmative obligation on a Party hereto, including an obligation to indemnify, without the written consent of the Party so affected. Consent shall not be unreasonably withheld.
- 9E. Insurance:** Each Party shall maintain comprehensive liability insurance coverage in an amount not less than one million dollars per occurrence with coverage of the other Party as an additional insured. Upon request, a Party shall provide the other Party with a certificate of insurance evidencing this coverage.

**9F. Excluded Limitations:**

The above indemnifications shall not be limited by the availability of insurance coverage to the indemnifying party, or by any protection afforded the indemnifying party under the Workers' Compensation Acts, Disability Acts or other employee benefits acts.

**10. LIMITATION OF LIABILITY:**

**NEITHER PARTY'S LIABILITY ON ANY INDEMNIFICATION OR ANY CLAIM OF ANY KIND, UNDER ANY THEORY, AT LAW OR IN EQUITY, INCLUDING NEGLIGENCE OR STRICT LIABILITY, FOR ANY LOSS OR DAMAGE ARISING OUT OF, CONNECTED WITH, OR RESULTING FROM THE PERFORMANCE OR BREACH OF THE TERMS HEREOF, OR FROM THE DESIGN, MANUFACTURE, SALE, DELIVERY, RESALE, INSTALLATION, TECHNICAL DIRECTION OF INSTALLATION, INSPECTION, MODIFICATION, REPAIR, OPERATION OR USE OF ANY SERVICE, GOOD OR PART THEREOF SHALL IN ANY CASE EXCEED THE PRICE ALLOCABLE TO THE SERVICE, GOOD OR PART THEREOF WHICH GIVES RISE TO THE CLAIM. IN NO EVENT SHALL EITHER PARTY HAVE ANY LIABILITY FOR ANY INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES ARISING OUT OF OR IN CONNECTION WITH A BREACH OF THE CONTRACT SALE OR ANY OTHER DUTY OF THAT PARTY WITH RESPECT TO THE GOODS OR SERVICES OR THIS AGREEMENT, INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOST PROFITS, LOST SALES OR INJURY TO PERSONS OR PROPERTY EVEN IF THE PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH LOSSES.**

**11. FORCE MAJEURE:**

Except with respect to payment obligations under this Agreement, neither Party shall be liable for or will be considered to be in breach of or default under this contract on account of any delay or failure to perform as a result of any causes or conditions that are beyond the Party's reasonable control and that the Party is unable to overcome through the exercise of commercially reasonable diligence, including but not limited to pandemics, fire, explosion, flood, storm or other acts of God, disruptions in transportation networks, failures of carriers or utilities, war, embargo, strike, riot, or the intervention of any government authority. If any force majeure event occurs, the affected Party shall give prompt written notice to the other party and use commercially reasonable efforts to minimize the impact of the event.

**12. LIMITATION OF ACTIONS:** No action for breach of any term of this contract of sale or any other duty of Seller with respect to these Goods may be commenced more than one (1) year after Installation Completion.

**13. CHANGES,  
CANCELLATION:**

Any changes to the scope of the Goods and Services under this Agreement must be agreed in a writing executed by both Parties. Orders may not be canceled except by written notice received by Seller prior to shipment. A restocking charge of ten percent of the selling price will be applied for the cancellation of standard items. Charges for the cancellation of special items will be based on non-recoverable expenses accruing to the order sustained by Seller plus ten percent of the selling price. Either Party may cancel an existing order without penalty or decline future orders under the Agreement in the event of (a) a change of control of, or (b) a bankruptcy of the other Party.

**14. INTELLECTUAL  
PROPERTY RIGHTS:**


The Goods sold hereunder are of Seller's proprietary design offered in configurations and only with such modification as is customarily available to all buyers in the marketplace without significantly altering the Good's, function or processes. The Goods do not incorporate or embody Buyer's intellectual property, or any technology developed by Buyer or specifically for Buyer. Buyer acquires no greater interest in the Goods, or the intellectual property embodied in the Goods than those rights of use, maintenance and resale as customarily accompany the purchase of off-the-shelf tangible goods. All Seller intellectual property including but not limited to patents, trademarks, trade names, trade secrets, and all modifications and derivatives thereof, are and shall remain the sole and exclusive property of Seller.

Any operating software or instruction that is embedded in or incorporated into the hardware or electrical components of the Equipment as an integral part of the Equipment delivered is referred to herein as "Embedded Software." Embedded Software is licensed, not sold. Seller grants Buyer a nonexclusive, perpetual, fully paid, royalty-free restricted license to Embedded Software, in executable form, solely as embedded as part of or through the Equipment and only in conjunction with Buyer's operation of the Equipment and Services as provided by Seller. Buyer may not install, access, configure or use any Embedded Software (including any APIs, tools, databases or other components of any Embedded Software) separately or independently of the rest of the Equipment, whether for production, technical support or any other purposes, or otherwise attempt to gain direct access to any Embedded Software components, or permit anyone else (including Buyer's customers) to do any of these things. Embedded Software excludes applications softwares formulated to interface with end users of the goods to perform specific business or technical functions ("Applications Software") and which are subject to the TRUMPF End User License Agreement.

**15. DESIGN CHANGES:**

Acceptance of Purchase Order by Seller determines product version for delivery. The designs and specification of all Goods sold may be subject to subsequent change by Seller without notice and, in the event of any such changes, Seller will have no obligation whatsoever to make similar changes in Goods previously ordered.

# Technical Quotation



**16. RESERVATION OF  
SECURITY INTEREST; RISK  
OF LOSS:**

Seller hereby reserves, and Buyer hereby grants a security interest in the Goods (and the proceeds thereof) as security for the payment of the unpaid balance of the purchase price and Buyer's performance of its other obligations hereunder. Buyer will execute and deliver to Seller such financing statements as Seller shall request to perfect such security interest. The security interest hereunder shall terminate upon Buyer's payment in full of the purchase price of Goods and Services, and the respective taxes.

The risk of loss passes to Buyer upon delivery of the Goods to the carrier. Insurance against loss or damage to the Goods during shipment is the responsibility of Buyer. Until the entire purchase price for the Goods is paid in full, Buyer will keep the Goods insured against loss or damage by fire and other risks and hazards included with so-called "extended coverage" insurance, in an amount at least equal to such purchase price. Losses under such insurance shall be made payable to Seller and any payments under such insurance shall be paid to Seller and applied to the unpaid balance of the purchase price. Upon request, Buyer will furnish Seller with copies of the policies of such insurance and each renewal thereof.

**17. NONPAYMENT OF  
PURCHASE PRICE:  
STORAGE AND  
COLLECTION COSTS:**

If Buyer shall not pay the full purchase price within 30 days from the date of Installation Completion of the Goods; Buyer will pay Seller thereafter an additional one and one-half percent (1-1/2%) per month on the unpaid balance of the purchase price until paid in full. Such charge shall be added to and become an additional part of the purchase price for the Goods. Buyer also will pay all storage costs for the Goods after the scheduled delivery date as well as all costs of collection incurred by Seller in collecting the purchase price for the Goods and enforcing its security interest in the Goods, including, without limitation, reasonable attorneys' fees and expenses incurred by Seller.

**18. GOVERNING LAW:**

The validity, interpretation and performance of this contract for sale shall be governed by the laws of the State of Connecticut, excluding its conflict of law rules. The United Nations Convention on Contracts for the International Sale of Goods is expressly disclaimed by the Parties with respect to this Agreement and the transactions contemplated hereby.

**19. ENTIRE AGREEMENT:**

This Agreement constitutes the entire agreement between the Parties pertaining to the subject matter hereof, and supersedes all prior agreements, understandings, negotiations and discussions, whether oral or written, of the Parties pertaining to the subject matter hereof.

**Effective Date:**

Y2023-01-03 Revisions

**Country of origin**

The machine plant is manufactured by TRUMPF Inc., Farmington, CT/USA. Its customs origin is USA.

## Export

This machine is subject to international export control. In accordance with export list position: 6A005 For delivery from •the EU according to Article 3, Paragraph 1 of the Regulation (EC) No. 821/2021 •Switzerland according to Article 3, Paragraph 1 of the Regulation 946.202.1 The delivery is then subject to the granting of an export authorization by the exporting authority responsible for the respective exporting country: •Germany: Federal Office of Economics and Export Control (BAFA) •Switzerland: State Secretariat for Economic Affairs (SECO) In the case of re-export of US products or of US products installed in our machines/plants, a re-export authorization may also be required from the responsible US authority, the Bureau of Industry and Security (BIS). If need be, please contact the contact person responsible for you at TRUMPF.

## Consumables

The lens and nozzle of the lens cutting head as well as the protective glass are subject to wear depending on the particular case and are, like all consumables, not part of the scope of warranty.

## 3. Additional information about the order range

1000 TruLaser 1030 fiber (L94)

### Machine

#### Box frame

- High level of machine dynamics and accuracy due to high-precision, hardened guides
- Self-stiffening prevents vibrations when changing directions

#### Motion unit for high-precision processing

- Optimal processing speed and precision
- Low-weight, temperature-resistant laser-welded cross beam
- Roller-bearing and ball-bearing on flat guides with zero-backlash, rack and pinion drive that acts on both sides

#### Process cooler for machine and laser (water/air)

- Cools lasers and linear motors in separate circuits
- Low cooling capacity required thanks to energy-efficient TruDisk laser

#### Work area illumination

- Effective illumination of the entire work area
- Robust lighting design

#### Pilot laser

- Enables simple, rapid zero point offset in manual operation
- Simple placement of separating cuts
- Good visibility thanks to green laser light

#### Automatic nozzle cleaning

- Longer use of nozzles
- Self-cleaning of nozzles by machine

#### Integrated electrical cabinets

- Electrical cabinets integrated in the machine frame
- Space-saving, compact installation





## Scrap drawers

- Reliable collection of small parts and slag
- Simple disposal
- Clean machine interior



## Closed beam guidance via laser light cable (LLK)

- Flexible beam guidance from solid-state laser to the cutting unit at the machine
- TRUMPF laser light cable is robust and long-lasting

## Transport and installation device

- Faster start-up of the machine on site due to one-way transport fixture

## Power supply via the machine

- Only one power connection required for the entire system (machine and laser)
- Beam source receives power via the machine

## **TRUMPF laser**

### Excitation using pump diodes


- Very long service life of diodes

### Laser power control


- Higher level of parts quality and shorter part times due to dynamically adjusted laser power

## **Cutting unit**

### Single cutting head strategy



- Universal cutting head enables processing of entire range of sheet thicknesses and materials without replacement of cutting head




## Universal cutting unit with adaptive lens system

- Highest level of productivity & quality in thin to medium sheet thicknesses and high productivity & quality in thick sheets with a universal cutting unit (variable focus adjustment)
- High level of process reliability and reduction of microjoints thanks to efficient collision protection


## Protective glass

- Protects cutting unit lenses from contamination
- Increases process reliability as a result
- Protective glass is less expensive as a consumable than lenses



## Online condition checking of protective glass

- Reduced non-productive time and protective glass usage
- Sensor constantly monitors the protective glass condition
- Protective glass cleaned/replaced only as needed



## Automatic nozzle centering

- Consistently high cut quality, since the nozzle is automatically centered during loading
- Reduced non-productive time and fewer rejects



## Control

### Quick post-production

- Reduced programming effort
- Enables reproduction of individual parts from an existing program where required

### Integrated technology data

- Wide range of laser technology tables (LTTs) for robust and premium quality processing of commonly available materials
- Program-controlled regulation of process parameters like feed rate and cutting gas pressure

## Auto-shutdown

- Electrical energy consumption is reduced in idle state
- Automatic shutdown of the entire machine after the program or job end
- Particularly beneficial in combination with automation

## Programmable cutting gas/pressure selection


- Program-controlled setting of cutting gas pressure for different materials and material thicknesses
- Display of pressure on operating panel

## Microweld

- Small weld point that holds the finished part in the scrap skeleton
- Prevents tilting and falling of finished parts
- Interactive programming in the TruTops programming system

## Remote support interface

- Contact with Technical Service directly via broadband Internet connection
- Minimization of machine downtimes
- High data security due to passwords
- Requirement: broadband Internet connection available




## Production plan

- Several NC programs generated one after the other can be combined in the order of their creation or in the context of a job to form a production package
- Information can be forwarded about the production package to TruTops Fab or a control system (e.g. TC-CELL)
- Unattended execution of NC programs

## Multi-sheet processing

- Processing of several sheets on one pallet
- Low level of operator involvement thanks to automatic production plan over multiple sheets
- Can also be used for sheets with different materials
- Optimal utilization of entire work area, even when processing small sheets



## Condition Guide

- Higher machine availability due to reduction of unplanned idle states and needs-based maintenance
- Cutting capability of machine can be detected at a glance using traffic light system
- Simple prognosis of required action by means of progression diagram

## 18.5" widescreen multi-touch color display

- Fast and efficient operation by intuitive touch interface with simplified user prompts
- Particularly easy, fast-to-learn operation


## Cutting Guide

- Helps prevent cutting problems
- Systematic support of operator during setup
- Checks cutting programs for conformity with TRUMPF rules

## Functions

### AdjustLine

- Increased process reliability when cutting poor material
- Direct access to two alternative cutting data records on machine that increase the robustness of the process



### ControllLine

- Capacitive height and process control, maintains distance from nozzle to plate during cutting process and remains constant even with uneven sheets
- Prevents collisions between the cutting head and workpiece


### FastLine

- Optimizes entire cutting process
- Ensures maximum economic efficiency
- Reduces slag spatters on the upper side of the sheet

### FlyLine


- Flying, positionally-accurate activation/deactivation of laser without axis stop
- Often allows a significant reduction in processing time for parts with many contours






## FocusLine

- Enables program-controlled setting of focus position for entire range of materials without manual intervention
- Requirement for maximum processing speed and edge quality



## NitroLine

- Nitrogen high-pressure cutting for oxide-free cutting edges
- Can be used for mild steel, stainless steel and aluminum alloys
- Automatic cutting gas control via NC program



## PierceLine

- Shorter sheet runtimes thanks to a reduction in piercing times of up to 60%
- Process-reliable piercing even under difficult conditions
- Higher part quality thanks to reduced spatter
- Detection of the end of piercing
- In addition, as of TruDisk 6001: Control and monitoring of piercing process



## PlasmaLine

- Higher quality, less wear and improved process reliability when machining thick stainless steel and mild steel thanks to plasma sensor system

## Copper cutting package

- Includes cutting data with the cutting gases nitrogen and oxygen
- Stable processing of copper with reliable TRUMPF cutting data

## Brass cutting package

- Contains cutting data with the cutting gas nitrogen
- Stable processing of brass with reliable TRUMPF cutting data

## Data transmission

### USB interface




- The machine control is equipped with a USB port for data transmission as standard

### RJ45 network interface



- The machine control is equipped with an RJ45 network interface (10 or 100 Mbit/s) as standard

### Central Link



- Basic infrastructure for communication with OPC UA interface systems
- Data provided via interface systems (e.g. production status interface)

### Online Update Manager


- Higher IT operational safety by the automatic provision of safety updates at the machine
- Better checking of update requirements

## Safety

### CE marking and EC Machinery Directive




- Delivery with EU declaration of conformity and CE marking
- Machine is subject to the EC Machinery Directive 2006/42/EC, the EMC Directive 2014/30/EU and further directives where relevant
- In individual cases, the machine can be sold only as "partially completed machinery" with declaration of incorporation. Such a machine must be completed by an integrator.




## Multi-chamber compact dust extractor

- Efficiently controlled exhaust of fumes and airborne particles
- Compliant with work area limit values for pollutants in the ambient air
- Enables suction into individual chambers so that suction only ever takes place in the chamber located under the area being processed




## Machine cover with certified door viewing panel

- No risk of injury due to laser beam
- Optimal accessibility and ergonomics as well as visibility into the machine interior
- One panel included as standard



- Automated unloading of finished sheets by unloading rake with prongs made of mild steel



- Automated unloading of finished sheets by unloading rake with prongs made of mild steel

- Pallet for sorting cut sheets and finished parts

## 3000 External solid-state laser TruDisk 4001 with one laser output



- Higher productivity and higher maximum sheet thicknesses due to higher laser power
- Low operating costs thanks to high efficiency
- High resistance to back-reflections
- Power stability over service life
- Maximum part quality, even in thick sheet, thanks to BrightLine fiber
- Further increased productivity thanks to the Highspeed cutting package

## **4000 External solid-state laser TruDisk 6001 with one laser output**



- Higher productivity and higher maximum sheet thicknesses due to higher laser power
- Low operating costs thanks to high efficiency
- High resistance to back-reflections
- Power stability over service life
- Maximum part quality, even in thick sheet, thanks to BrightLine fiber
- Further increased productivity thanks to the Highspeed cutting package

## **5000 External solid-state laser TruDisk 10001 with one laser output**



- Higher productivity and higher maximum sheet thicknesses due to higher laser power
- Low operating costs thanks to high efficiency
- High resistance to back-reflections
- Power stability over service life
- Maximum part quality, even in thick sheet, thanks to BrightLine fiber
- Further increased productivity thanks to the Highspeed cutting package

## **7000 Sorting Guide**


- Information-supported manual sorting at the pallet changer
- Shorter search times and reduced error rate through user-defined sorting recommendations and automated part identification

## **8000 Nozzle changer**



- Higher productivity due to minimal non-productive times: no manual nozzle changes, e.g. with material or process changes
- Low level of operator involvement thanks to fully automatic changes and return of nozzles to storage
- Upon change of process, the nozzle is cleaned with a brush and returned to storage in the nozzle holder; it can be installed again later

## **9000 DetectLine**



- Precise sheet position detection
- Dimensionally accurate and quick further processing of pre-fabricated parts (e.g. punching parts)
- Significant time savings due to comprehensive automation of focal position adjustment

## 10000 Drop&Cut



- Time savings in the post-production of parts
- Maximize material efficiency by using remainder sheets
- Camera image of remainder sheet is easily filled with part geometries
- Maximum operator convenience and process reliability thanks to cutting preview in live image (augmented reality)
- No programming knowledge required

## 11000 Integrated camera 1 for process viewing

- Process viewing and rough assessment of cutting result from any location
- Reduction of operator involvement for process monitoring
- Video stream from work area can be shown on external monitor in any location via a DVI interface
- View of the front section of the work area (about 2.5 m)

## 12000 Integrated camera 2 for process viewing


- Process viewing and rough assessment of cutting result from any location
- Reduction of operator involvement for process monitoring
- View of rest of work area (from 6 m format up to 4.5 m)

## 13000 Smart Collision Prevention / Purchase




- Innovative execution algorithm prevents collisions between tilting parts and the cutting head
- Sheet layout for the reliable production of parts with a risk of tilting - mostly without microjoints
- Less reworking, quicker part sorting
- Increased material efficiency thanks to closer nesting
- Low level of operator involvement

## 14000 Dot Matrix Code / Purchase



- Process reliability in sheet metal processing thanks to clear part identification, fewer rejects
- Time savings in the sheet metal process chain thanks to part identification (e.g. activation of correct bending program)
- Productivity through application of codes within seconds during laser processing (minimum interruption of productive time)

## 15000 Highspeed Eco cutting package



- Huge gas savings: up to 70% less gas consumption in fusion cutting
- Significantly faster cutting speed: Increase in sheet throughput by up to 100%
- Can be used in fusion cutting of medium sheet thicknesses for mild and stainless steel

## 16000 CoolLine with water container



- Clear increase in process reliability thanks to targeted water spray in thick mild steel
- Cutting of delicate contours (e.g. thin webs, smaller holes) and of lower quality materials possible
- Material cost savings thanks to closer nesting – up to 25 % less scrap
- The supply from the water container means that no water connection near the machine is necessary

## 17000 Titanium cutting package

- Process-reliable cutting of titanium with TRUMPF cutting data
- Processing flexibility: Argon cutting (shiny edge) and also nitrogen cutting (matt edge) possible from 4 kW

## 18000 Compressed-air cutting

- Compressed air can be used as cutting gas (in addition to cutting with oxygen and nitrogen)
- Reduced part costs, in particular with high nitrogen prices
- Use of compressed air affects roughness depth and cutting quality

## 20000 EdgeLine Bevel / Purchase


- Simple automatic application of chamfers & markings on components
- Various angles and chamfer depths thanks to a wide range of process parameters
- Can be used for mild steel in different sheet thicknesses
- Saves process steps, reduces handling costs and minimizes manual rework

## **21000 Clamps (2x for one pallet)**



- Optimal part precision and process reliability with the processing of thin sheets or blanks
- No slipping of sheet metal parts during high-pressure cutting
- No tipping of small blanks between the slats
- Holding of warped sheets and pre-processed products

## **22000 Clamps (4x for two pallets)**



- Optimal part precision and process reliability with the processing of thin sheets or blanks
- No slipping of sheet metal parts during high-pressure cutting
- No tipping of small blanks between the slats
- Holding of warped sheets and pre-processed products

## **23000 Partitioned slag drawers**

- Partitioned slag drawers allow tighter wall clearance and ergonomic emptying
- Better space utilization at the machine thanks to the partitioned slag cart
- Smaller open spaces required

## **24000 CO2 extinguisher system for compact dust extractor**



- Higher level of fire protection by automatic extinguisher system (may be required by fire protection insurance)
- Reduction of downtime

## **26000 Machine status light**

- Enables color-coded machine status display

## **27000 Spraying equipment**

- Reduces slag sticking on the upper side of the sheet
- Reduced reworking
- Program-controlled application of spray film on the sheet metal at the piercing spot

## **28000 Fully automatic pallet changer (with light barrier)**

- Preparation of new sheets parallel to production
- Manual unloading of cut sheets parallel to production
- Automatic production plan for several sheets; relieves burden on operator

## **30000 MobileControl app**



- Transmission of the control panel to the user interface of an iPad
- Flexible operator position for simple monitoring and control of the machine in the immediate vicinity
- App available from the app store

## **31000 Wireless Operation Point**



- Communication between machine and mobile devices (iPad) via a secure wireless network
- Use of MobileControl app (mobile service support) is possible
- Availability of apps and services can be varied depending on machine type

## **32000 Additional 10-m LLK extension between the laser and machine**

- Optimal use of hall layout thanks to flexible setup of the laser and the machine process cooler

## **33000 Mezzanine version of machine**

- Space-saving installation: Laser source, suction system and cooling unit on a platform (mezzanine structure) above the machine
- Mezzanine structure is provided by customer, TRUMPF provides corresponding preparation of the machine etc.

## **34000 Machine special installation**

- Customer-specific setup of laser unit, exhaust system and cooling unit
- Deviation from TRUMPF standard layout

## **35000 Cutting package for thick sheets**


- Contains cutting data for the processing of large sheet thicknesses.
- Only recommended for the production of single parts and small lot sizes.
- Quality (burr formation, roughness) of the parts cut with the option may differ significantly from standard TRUMPF processes.
- Parameters provided with the option must be adjusted by the customer if appropriate.
- For example, adjusting the piercing parameters may be necessary in the event of differing material quality. Using the option may result in the disproportionate consumption of nozzles and/or protective glass.

## 38000 Prefilter for gases nitrogen and oxygen

- Support for compliance with the installation conditions
- Risk minimization of possible machine failure due to excessive particle count in gas lines

## 39000 TruTool TSC 100 (3A1) USA

Cost reduction up to 75%



The TruTool TSC 100 is a purchase worth making. In comparison to time- and energy-intensive manual cleaning, you can cut costs by around 40%. When compared with replacing slats at regular intervals, multiple cleaning can even save you up to 75% of the costs.

### Outstanding cleaning results



TruTool TSC 100 automatically adapts to different slag thicknesses of up to 25 mm and achieves optimal cleaning results, even with stubborn stainless steel slag. The slats themselves are cleaned laterally and in the spaces between the teeth. Another plus point: You can insert the TruTool TSC 100 into any row of slats and clean them completely up to the edge of the pallet without removing them.

### Intelligent monitoring system



An intelligent monitoring system ensures reliable and safe work processes. An integrated LED display informs you with fast, continuous flashing when the seal needs to be replaced. Thanks to the new seal function monitoring, the manual check previously required at regular intervals is no longer necessary. The maintenance interval is automatically controlled with an electronic display. This saves you time and prevents possible damage to the tool that can occur if the seal is not checked and replaced at the specified maintenance interval.

### Cleaning tool

Choose between tool no. 2 for slat thicknesses 2 mm - 2.9 mm and tool no. 3 for 3 mm - 3.9 mm. The tools have an impressively long service life. You can clean an average of 10 standard pallets or a distance of 1000 meters before the first tool change.

## 40000 LoadMaster 1530

### Loading

Loading station

- Provision and alignment of raw sheets

## 41000 Peeling unit

- Separates sheets that are stuck together when lifting the top sheet
- Peeler suction cup with special stripping insert, for sheet thicknesses up to 8 mm
- Greater process reliability during loading due to clean cutting of the sheets

## 43000 Second light barrier circuit



- Optical safety sensors for safeguarding the danger zone


## 44000 Front loading cart B1

- Cart system for provision of raw material
- Increases productivity due to loading outside the safety circuit

## 45000 Front dual loading cart B1


- Double cart system for provision of raw material
- Increase in raw material capacity
- Increases productivity due to loading outside the safety circuit
- Reduced setup times
- Greater flexibility due to two raw material places

## 46000 Travel rails, embedded



- Travel rails for cart systems
- Adaptation of travel rails to local conditions


## 47000 LiftMaster 1530 (AL35)



### Loading

#### Double sheet detection

- Detects the thickness of the lifted sheet using a probe arm
- Detection of sheets that are stuck together
- Greater process reliability when loading sheets

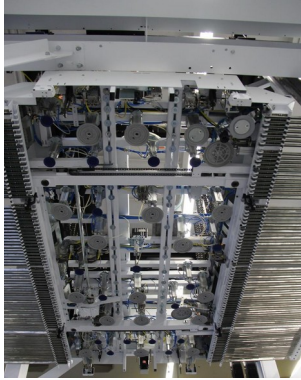


## Suction frame

- Automatic loading of raw material by individually controllable suction cups
- Reduced machine waiting times for loading automation

## Peeling unit

- Separates sheets that are stuck together when lifting the top sheet
- Peeler suction cup with special stripping insert, for sheet thicknesses up to 8 mm
- Greater process reliability during loading due to clean cutting of the sheets



## Separation of thin sheet

- Separation of thin sheets with a thickness of 0.8–2.0 mm is supported by a special peeler suction cup, fanning magnet and air nozzle
- Separates sheets that are stuck together, especially film-coated or oiled sheets
- Greater process reliability when loading thin sheets


## 48000 Loading station

- Provision and alignment of raw sheets

## 49000 Unloading platform

- Unloading station for cut sheets

## 50000 Rake with belt prongs for low-scratch, positioning accurate unloading (prong spacing 67 mm)




- Automated unloading of finished sheets by unloading rake with belt prongs
- Enables protective, low-scratch and precisely positioned unloading of the sheets
- For sheets up to a sheet thickness of 15 mm

## **51000 Rake with belt prongs for low-scratch, position accurate unloading (prong spacing 33.5 mm)**




- Automated unloading of finished sheets by unloading rake with belt prongs
- Enables protective, low-scratch and precisely positioned unloading of the sheets
- For sheets up to a sheet thickness of 15 mm

## **52000 Pallet handling enhancement (including four longitudinal side grippers)**



- Transport of auxiliary machine pallets possible thanks to pallet grippers on the suction frame
- Enables correctly sorted production
- Consistent low-scratch handling and processing of sheets

## **53000 Part separation from 600 × 600 mm**



- Automatic separation of parts and scrap skeletons
- Additional, individually controllable suction cups separate finished parts from a size of 600 × 600 mm from the scrap skeleton.
- During unloading, the laser scanner checks whether all finished parts have been completely separated from the scrap skeleton.
- Reduction of the manual sorting time
- Stacked parts ready for further processing

## **54000 Supplementary suction frame**



- Profile frame with 30 additional suction cups
- Improved handling of maximum parts
- The removal of maximum parts can be better adapted to the range of parts.

## **55000 Integrated sheet alignment**



- Device for alignment of raw sheet on the rake frame
- Parallel-to-production alignment of sheets during transport
- Increased process reliability for part separation

## **56000 Symmetrical installation with loading on the right**

- Alternative installation version

## **58000 Base for LiftMaster**

- Layout-dependent increase for connection to storage systems

## 59000 Additional operating panel

- For acknowledging the light barrier circuit and controlling the cart system (if present) from another location
- Shortened routes

## 60000 Second light barrier circuit



- Optical safety sensors for safeguarding the danger zone

## 61000 Third light barrier circuit



- Optical safety sensors for safeguarding the danger zone

## 62000 Storage interface

- Allows stores to be connected to the machine or the loading/unloading system
- Definition of data exchange between a TRUMPF machine and a store for raw material or finished parts

## 63000 LiftMaster Compact 1530 (AL34)

### Basic unit

Two gantry stations



- Station for loading and unloading or for machine connection

### Extended pallet removal unit

- Greater distance between machine and pallet changer
- Frequently required if the machine is operated with automation

## Storage interface


- Allows stores to be connected to the machine or the loading/unloading system
- Definition of data exchange between a TRUMPF machine and a store for raw material or finished parts

## Touch start post

- For manual operation of the automation
- Allows error messages to be displayed in another location
- The button functions are indicated with a pictogram and a mark
- If the system is later expanded, a software update is sufficient to adapt the operating elements

## Loading

### Double sheet detection



- Detects the thickness of the lifted sheet using a probe arm
- Detection of sheets that are stuck together
- Greater process reliability when loading sheets

### Synchronous loader including separation of thin sheet



- Parallel loading of raw material on the pallet changer and storage of processed sheets on the finished part pallet of the synchronous loader
- Enables fast loading and unloading
- Separation of thin sheets with a thickness of 0.8 – 2.0 mm is supported by a special peeler suction cup and nozzle
- Greater process reliability when loading thin sheets

### Peeling unit


- Separates sheets that are stuck together when lifting the top sheet
- Peeler suction cup with special stripping insert, for sheet thicknesses up to 8 mm
- Greater process reliability during loading due to clean cutting of the sheets

## Cleaning brush for slats



- Removes loose slag residue or small parts from the slats
- Increases the process reliability for the processing of the subsequent sheets

## 64000 Thin sheet handling



- Enables gentle loading of sheets from a 0.4 mm sheet thickness
- Suction cup inserts prevent deformation of the sheet
- Double lifting cylinder on each suction cup to move to different end positions
- This makes it possible to put down the sheets gently

## 65000 Load station for expanded stack height



- Loading station with stroke function
- Expands the maximum stack height for raw material up to 300 mm

## 66000 Loading station for expanded stack height in TruStore 3030




- Expands the maximum stack height for raw material up to 170 mm

## 67000 Unloading platform

- Unloading station for cut sheets

## 68000 Rake with belt prongs for low-scratch, positioning accurate unloading (prong spacing 67 mm)



- Automated unloading of finished sheets by unloading rake with belt prongs
- Enables protective, low-scratch and precisely positioned unloading of the sheets
- For sheets up to a sheet thickness of 15 mm

## **69000 Rake with belt prongs for low-scratch, position accurate unloading (prong spacing 33.5 mm)**



- Automated unloading of finished sheets by unloading rake with belt prongs
- Enables protective, low-scratch and precisely positioned unloading of the sheets
- For sheets up to a sheet thickness of 15 mm

## **70000 PartMaster**



- Fast, ergonomic sorting of finished parts and scrap skeletons
- Suitable for sheet thicknesses up to 12 mm

## **71000 PartMaster at a gantry station**




- Fast, ergonomic sorting of finished parts and scrap skeletons
- Suitable for sheet thicknesses up to 12 mm

## **72000 PartMaster integration TruStore**




- Fast, ergonomic sorting of finished parts and scrap skeletons
- Suitable for sheet thicknesses up to 12 mm
- Additional installation of up to five storage locations possible
- Compact, space-saving layout

## **73000 Additional finished part pallet**



- Additional pallet for storing finished parts
- Replacement of finished part pallet using a forklift truck

## 74000 Part separation from 150 × 150 mm




- Automatic separation of parts and remainder sheet:  
Expansion grippers hold remainder sheet, finished parts on closed unloading rake ready for stacking
- Separation of parts from a size of 150 × 150 mm up to a sheet thickness of 6 mm
- Reduction of the manual sorting time
- Stacked parts ready for further processing

## 75000 Linear version




- Offers higher flexibility for the material flow
- Can be combined with cart systems, PartMaster or unloading platform
- Improved access to finished parts

## 77000 Loading cart




- Enables partially automated provision of raw materials
- Reduces material handling times
- Available in a wide range of formats

## 78000 Unloading cart




- Enables semi-automated removal of finished parts from the system
- Reduces material handling times
- Available in a wide range of formats

## 79000 Dual loading cart




- Increase in raw material capacity
- Supply with two different material types
- Parallel-to-production, manual loading of carts
- Reduced setup times
- Semi-automatic connection to store possible

## 80000 Double unloading cart




- Increase in unloading capacity for finished parts
- Parallel to production, manual unloading of carts
- Semi-automatic connection to store possible

## 81000 Double loading / unloading cart




- Increase in raw material and unloading capacity for finished parts
- Supply with two different material types
- Material supply for the machine and unloading of the finished parts mostly parallel to production
- Semi-automatic connection to store possible

## 82000 Travel rails, surface-mounted



- Travel rails for cart systems
- Adaptation of travel rails to local conditions

## 83000 Travel rails, embedded



- Travel rails for cart systems
- Adaptation of travel rails to local conditions

## 84000 Front loading cart (with scissor lift) for expanded stack height



- Cart system for provision of raw material
- Improved accessibility for loading operation

## 99000 Slim Nozzles Add-on

5 packs of any size EAB nozzles

## 100000 BrightLine Add-on

5 pieces of any size BrightLine nozzles

## 101000 CoolLine Add-on

7 pieces of any size CoolLine nozzles & 1 universal ceramic

# Technical Quotation



## 102000 Highspeed Eco Add-On

- 1 High Speed Eco EAV nozzle
- 2 packs of EAV inserts
- 2 packs of EAV sleeves

## 4. Additional information on technical data

### TruLaser 1030 fiber (L94)

#### Control, hardware, electrics

|                  |                    |
|------------------|--------------------|
| Control type     | Siemens SINUMERIK  |
| Operating system | Windows 10 IoT     |
| Screen           | multi-touch screen |
| Screen size      | 18.5 in            |
| Interface        | USB                |

#### Axis data - max. axis speed

|                              |           |
|------------------------------|-----------|
| Max. axis speed simultaneous | 140 m/min |
| Axis range X axis            | 100 m/min |
| Max. axis speed Y axis       | 100 m/min |
| Z axis                       | 80 m/min  |

#### Axis data - Accuracy

|                                           |          |
|-------------------------------------------|----------|
| Accuracy central positioning variation Ps | 0.03 mm  |
| Accuracy positioning deviation Pa         | 0.07 mm  |
| Accuracy smallest programmable increment  | 0.001 mm |

#### Axis data - Max. axis acceleration, cutting

|                        |                    |
|------------------------|--------------------|
| Axis range X axis      | 4 m/s <sup>2</sup> |
| Max. axis speed Y axis | 4 m/s <sup>2</sup> |

#### Axis data - Max. axis acceleration, positioning

|                        |                     |
|------------------------|---------------------|
| Axis range X axis      | 7 m/s <sup>2</sup>  |
| Max. axis speed Y axis | 7 m/s <sup>2</sup>  |
| Z axis                 | 17 m/s <sup>2</sup> |

#### Working range, workpiece size

|                                                                                                   |         |
|---------------------------------------------------------------------------------------------------|---------|
| Axis range X axis                                                                                 | 3000 mm |
| Max. axis speed Y axis                                                                            | 1500 mm |
| Z axis                                                                                            | 116 mm  |
| Max. workpiece weight up to TruDisk 6001                                                          | 930 kg  |
| Max. workpiece weight from TruDisk 8001 on a pallet (with heavy-duty pallet changer)              | 1800 kg |
| Max. workpiece weight from TruDisk 8001 on both pallets in total (with heavy-duty pallet changer) | 2200 kg |

# Technical Quotation



## Laser-specific data - TruFiber 3001 <sup>1</sup>

|                                       |        |
|---------------------------------------|--------|
| Max. laser power                      | 3000 W |
| Max. sheet thickness, mild steel      | 20 mm  |
| Max. sheet thickness, stainless steel | 15 mm  |
| Max. sheet thickness, aluminium       | 15 mm  |
| Max. sheet thickness, copper          | 6 mm   |
| Max. sheet thickness, brass           | 6 mm   |

## Laser-specific data - TruDisk 6001 <sup>2</sup>

|                                                    |        |
|----------------------------------------------------|--------|
| Max. laser power                                   | 6000 W |
| Max. sheet thickness, mild steel                   | 25 mm  |
| Max. sheet thickness, stainless steel              | 25 mm  |
| Max. sheet thickness, aluminium                    | 25 mm  |
| Max. sheet thickness, copper                       | 10 mm  |
| Max. sheet thickness, brass                        | 10 mm  |
| Max. sheet thickness, mild steel <sup>3</sup>      | 32 mm  |
| Max. sheet thickness, stainless steel <sup>4</sup> | 35 mm  |

## Laser-specific data - TruDisk 8001 <sup>5</sup>

|                                                    |         |
|----------------------------------------------------|---------|
| Max. laser power                                   | 8000 W  |
| Max. sheet thickness, mild steel                   | 25 mm   |
| Max. sheet thickness, stainless steel              | 30 mm   |
| Max. sheet thickness, aluminium                    | 25 mm   |
| Max. sheet thickness, copper                       | 12.7 mm |
| Max. sheet thickness, brass                        | 10 mm   |
| Max. sheet thickness, mild steel <sup>6</sup>      | 32 mm   |
| Max. sheet thickness, stainless steel <sup>7</sup> | 35 mm   |

## Laser-specific data - TruDisk 10001 <sup>8</sup>

|                                               |         |
|-----------------------------------------------|---------|
| Max. laser power                              | 10000 W |
| Max. sheet thickness, mild steel              | 25 mm   |
| Max. sheet thickness, stainless steel         | 40 mm   |
| Max. sheet thickness, aluminium               | 30 mm   |
| Max. sheet thickness, copper                  | 12.7 mm |
| Max. sheet thickness, brass                   | 12.7 mm |
| Max. sheet thickness, mild steel <sup>9</sup> | 32 mm   |

# Technical Quotation



## Laser-specific data - TruDisk 12001 <sup>10</sup>

|                                                     |         |
|-----------------------------------------------------|---------|
| Max. laser power                                    | 12000 W |
| Max. sheet thickness, mild steel                    | 30 mm   |
| Max. sheet thickness, stainless steel               | 40 mm   |
| Max. sheet thickness, aluminium                     | 30 mm   |
| Max. sheet thickness, copper                        | 12.7 mm |
| Max. sheet thickness, brass                         | 12.7 mm |
| Max. sheet thickness, mild steel <sup>11</sup>      | 35 mm   |
| Max. sheet thickness, stainless steel <sup>12</sup> | 50 mm   |

## Laser-specific data - TruFiber 4000

|                                                     |        |
|-----------------------------------------------------|--------|
| Max. laser power                                    | 4000 W |
| Max. sheet thickness, mild steel, O2                | 20 mm  |
| Max. sheet thickness, mild steel <sup>13</sup>      | 25 mm  |
| Max. sheet thickness, stainless steel, N2           | 20 mm  |
| Max. sheet thickness, stainless steel <sup>14</sup> | 35 mm  |
| Max. sheet thickness, aluminium, N2                 | 20 mm  |
| Max. sheet thickness, copper, O2                    | 8 mm   |
| Max. sheet thickness, brass, N2                     | 8 mm   |

## Consumption values - TruDisk 6001

|                                    |        |
|------------------------------------|--------|
| Average power input in production  | 15 kW  |
| Average Compressed air consumption | 5 m³/h |

## Consumption values - TruDisk 8001

|                                    |        |
|------------------------------------|--------|
| Average power input in production  | 17 kW  |
| Average Compressed air consumption | 5 m³/h |

## Consumption values - TruDisk 10001

|                                    |        |
|------------------------------------|--------|
| Average power input in production  | 19 kW  |
| Average Compressed air consumption | 5 m³/h |

## Consumption values - TruDisk 12001

|                                    |        |
|------------------------------------|--------|
| Average power input in production  | 25 kW  |
| Average Compressed air consumption | 5 m³/h |

## Consumption values - TruFiber 3001

|                                    |        |
|------------------------------------|--------|
| Average power input in production  | 12 kW  |
| Average Compressed air consumption | 5 m³/h |

# Technical Quotation



## Consumption values - TruFiber 4000

|                                    |        |
|------------------------------------|--------|
| Average power input in production  | 13 kW  |
| Average Compressed air consumption | 5 m³/h |

## Paint

|                          |                            |
|--------------------------|----------------------------|
| Main colour              | white, NCS S 0505-R80B     |
| Secondary colour         | blue, RAL DESIGN 250 20 20 |
| Switch cabinet/periphery | gray, RAL 7040             |

## LoadMaster 1530

### Loading

|                      |         |
|----------------------|---------|
| Max. sheet size (L)  | 3048 mm |
| Max. sheet size (W)  | 1524 mm |
| Min. sheet size (L)  | 1000 mm |
| Min. sheet size (W)  | 500 mm  |
| Max. sheet thickness | 25 mm   |
| Max. sheet weight    | 900 kg  |

## LiftMaster 1530 (AL35)

### Loading

|                      |         |
|----------------------|---------|
| Max. sheet size (L)  | 3048 mm |
| Max. sheet size (W)  | 1524 mm |
| Min. sheet size (L)  | 1000 mm |
| Min. sheet size (W)  | 1000 mm |
| Max. sheet thickness | 25 mm   |
| Max. sheet weight    | 900 kg  |

### Unloading

|                                             |         |
|---------------------------------------------|---------|
| Max. sheet size (L)                         | 3048 mm |
| Max. sheet size (W)                         | 1524 mm |
| Min. sheet size (L)                         | 150 mm  |
| Min. sheet size (W)                         | 150 mm  |
| Max. sheet weight                           | 900 kg  |
| Max. sheet thickness with unloading rakes   | 25 mm   |
| Max. sheet thickness with belt prongs       | 15 mm   |
| Max. sheet thickness with auxiliary pallets | 25 mm   |
| Min. part size (L)                          | 150 mm  |
| Min. part size (W)                          | 150 mm  |

## LiftMaster Compact 1530 (AL34)

# Technical Quotation



## Loading

|                      |         |
|----------------------|---------|
| Max. sheet size (L)  | 3048 mm |
| Max. sheet size (W)  | 1524 mm |
| Min. sheet size (L)  | 1000 mm |
| Min. sheet size (W)  | 1000 mm |
| Max. sheet thickness | 25 mm   |
| Max. sheet weight    | 900 kg  |

## Unloading

|                                             |         |
|---------------------------------------------|---------|
| Max. sheet size (L)                         | 3048 mm |
| Max. sheet size (W)                         | 1524 mm |
| Min. sheet size (L)                         | 150 mm  |
| Min. sheet size (W)                         | 150 mm  |
| Max. sheet weight                           | 900 kg  |
| Max. sheet thickness with unloading rakes   | 25 mm   |
| Max. sheet thickness with belt prongs       | 15 mm   |
| Max. sheet thickness with auxiliary pallets | 25 mm   |

<sup>1, 2, 5, 8, 10</sup> This is a selection of sheet thickness specifications with TRUMPF cutting data, detailed information in the data collection on request

<sup>3, 4, 6, 7, 9, 11, 12, 13, 14</sup> With cutting package for thick sheets option