battery_power_compact_front_service_rail_rev_b

Rev B | Units: mm | Site-fit fabrication sheet

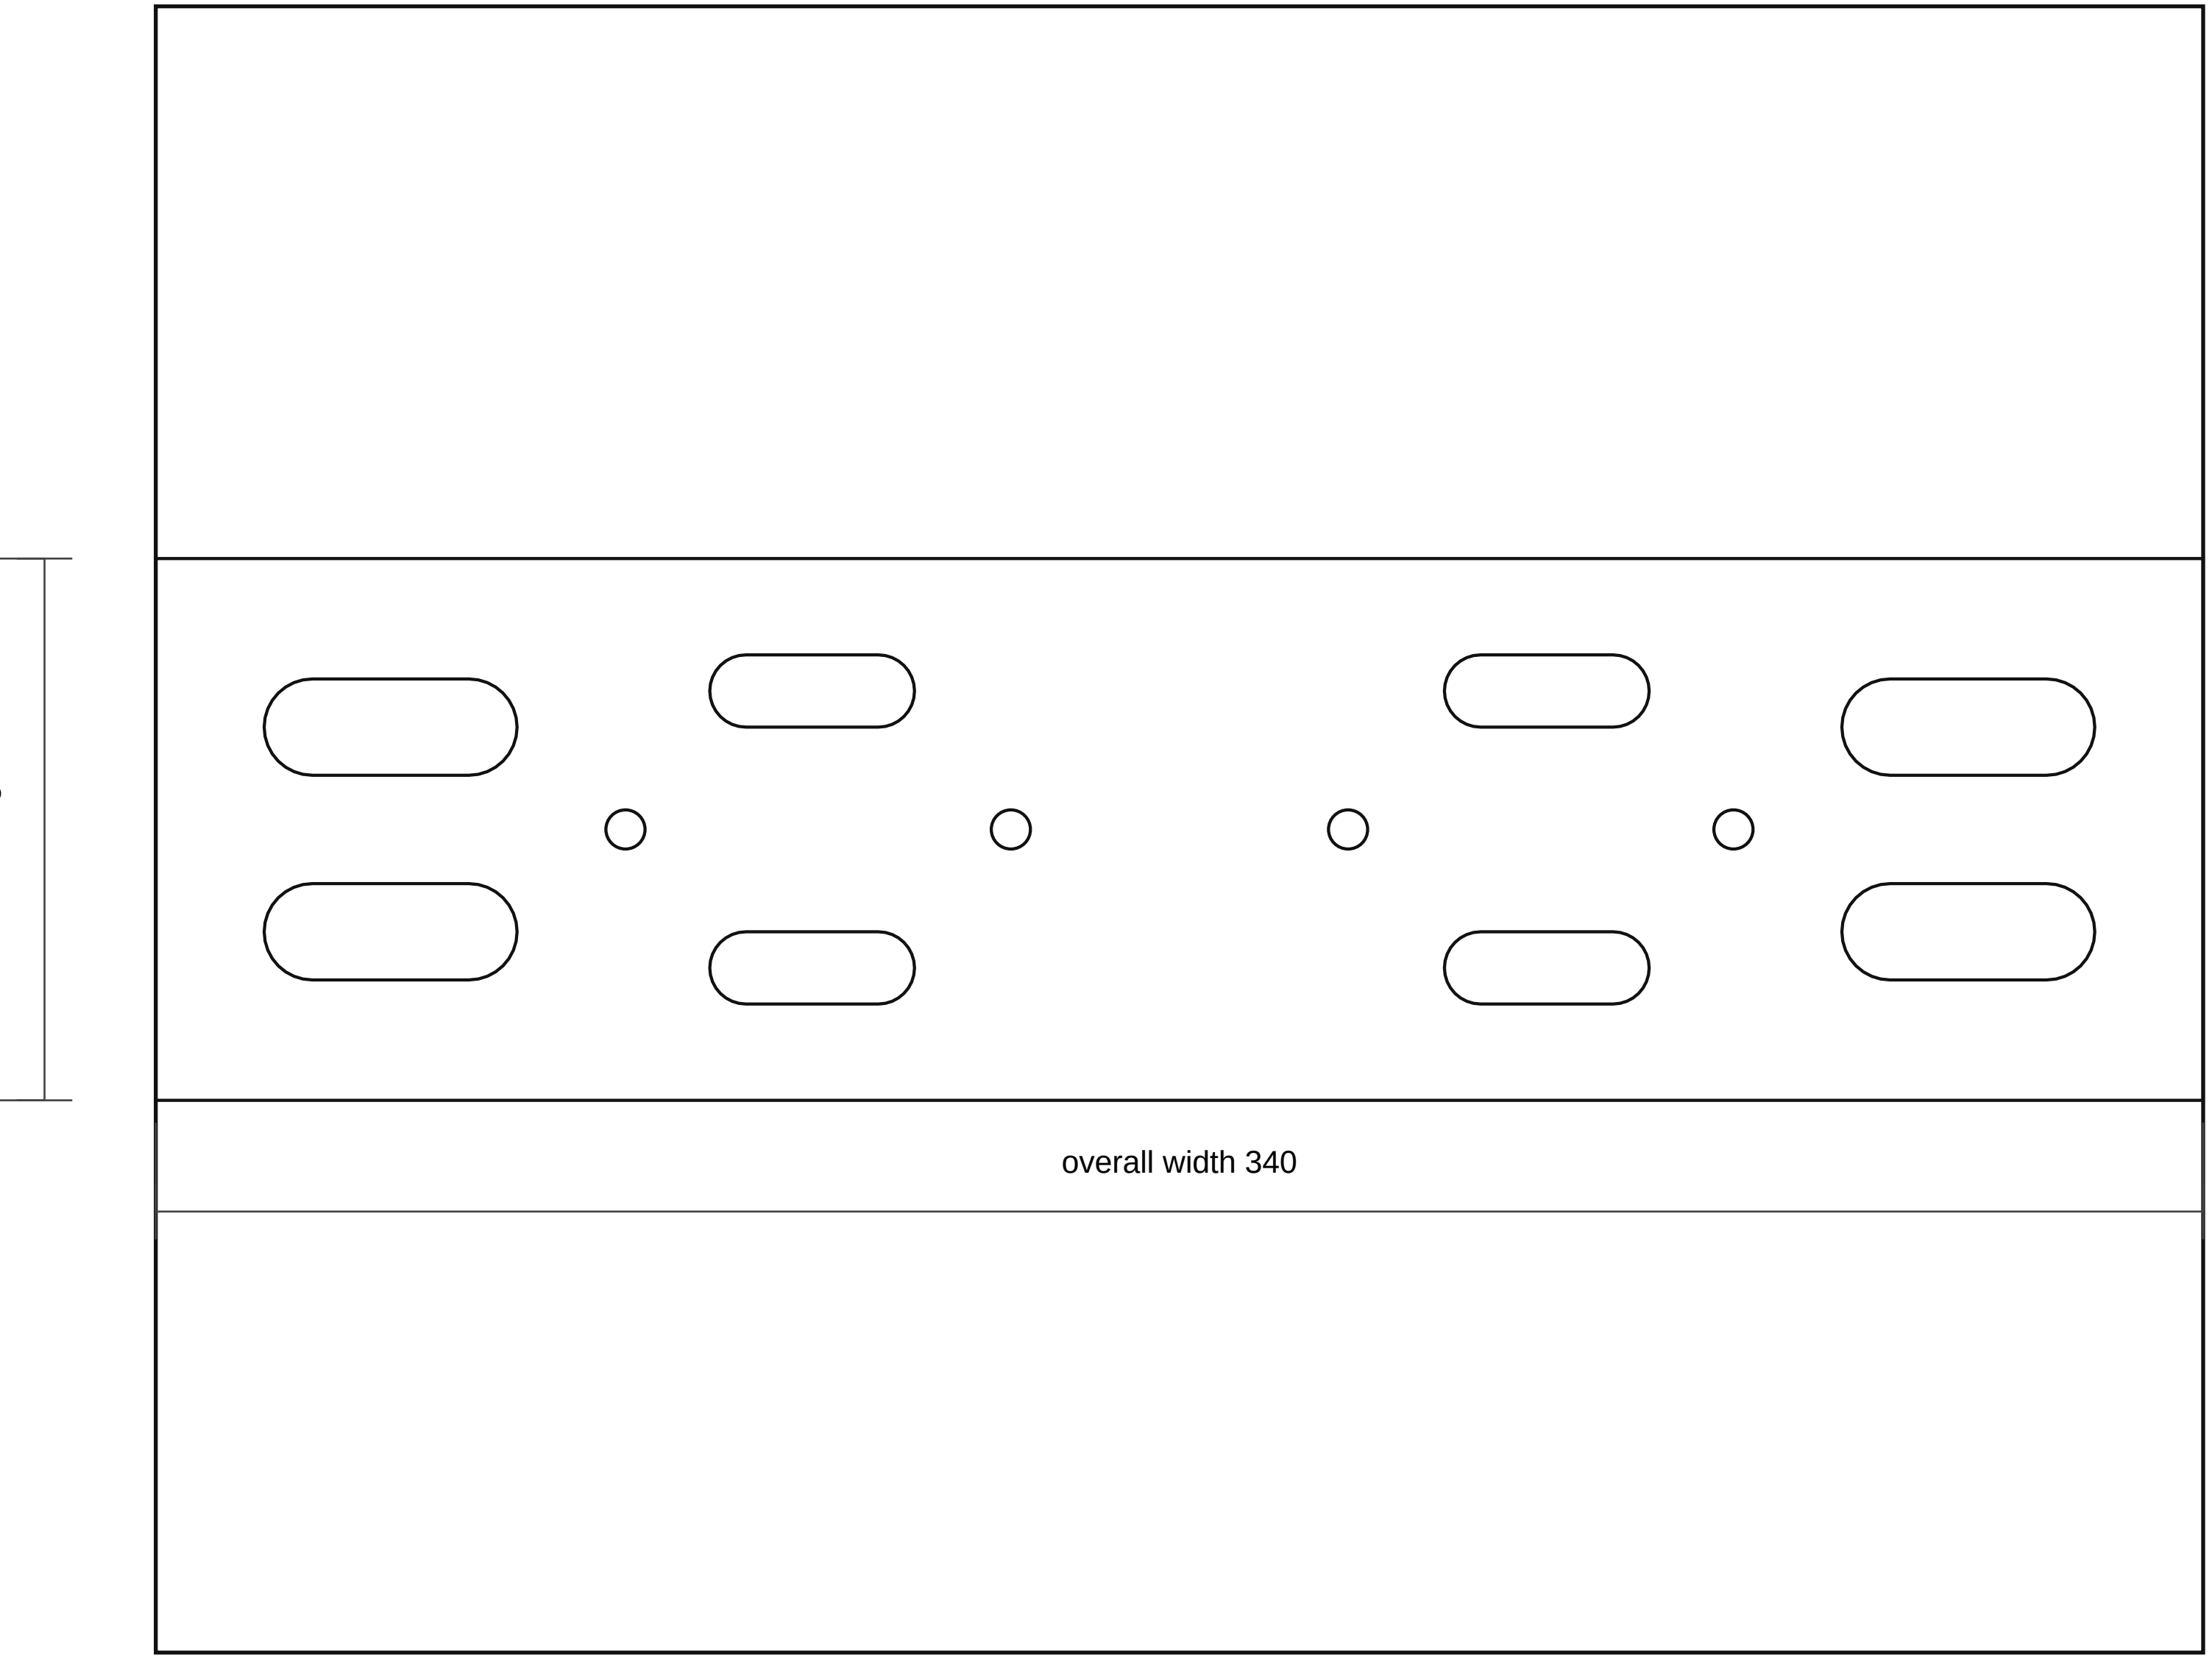

Fabrication Notes

- Compact front service rail: 340 x 90 x 3.0 mm mild steel. This replaces the earlier large one-piece backplane.
- Use the folded aluminium relay carrier as its own tray; this steel rail only provides a compact vehicle-side pickup/brace if the front cavity map proves room.
- MIDI Rev C remains its own open 190 x 150 plate/subplate assembly; mount it on a small measured bracket or rails, not on a shared large backplane.
- Cutoff mounts on its own compact tab so it can be placed at the most accessible front/top position after cavity mapping.
- Do not cut final holes until the battery-cavity map proves the front/radiator-side volume, cable bend radius, and LHD clearance.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: battery_power_compact_front_service_rail_rev_b.dxf
- SVG: battery_power_compact_front_service_rail_rev_b.svg

battery_stand_compact_top_tray_rev_b

Rev B | Units: mm | Site-fit fabrication sheet

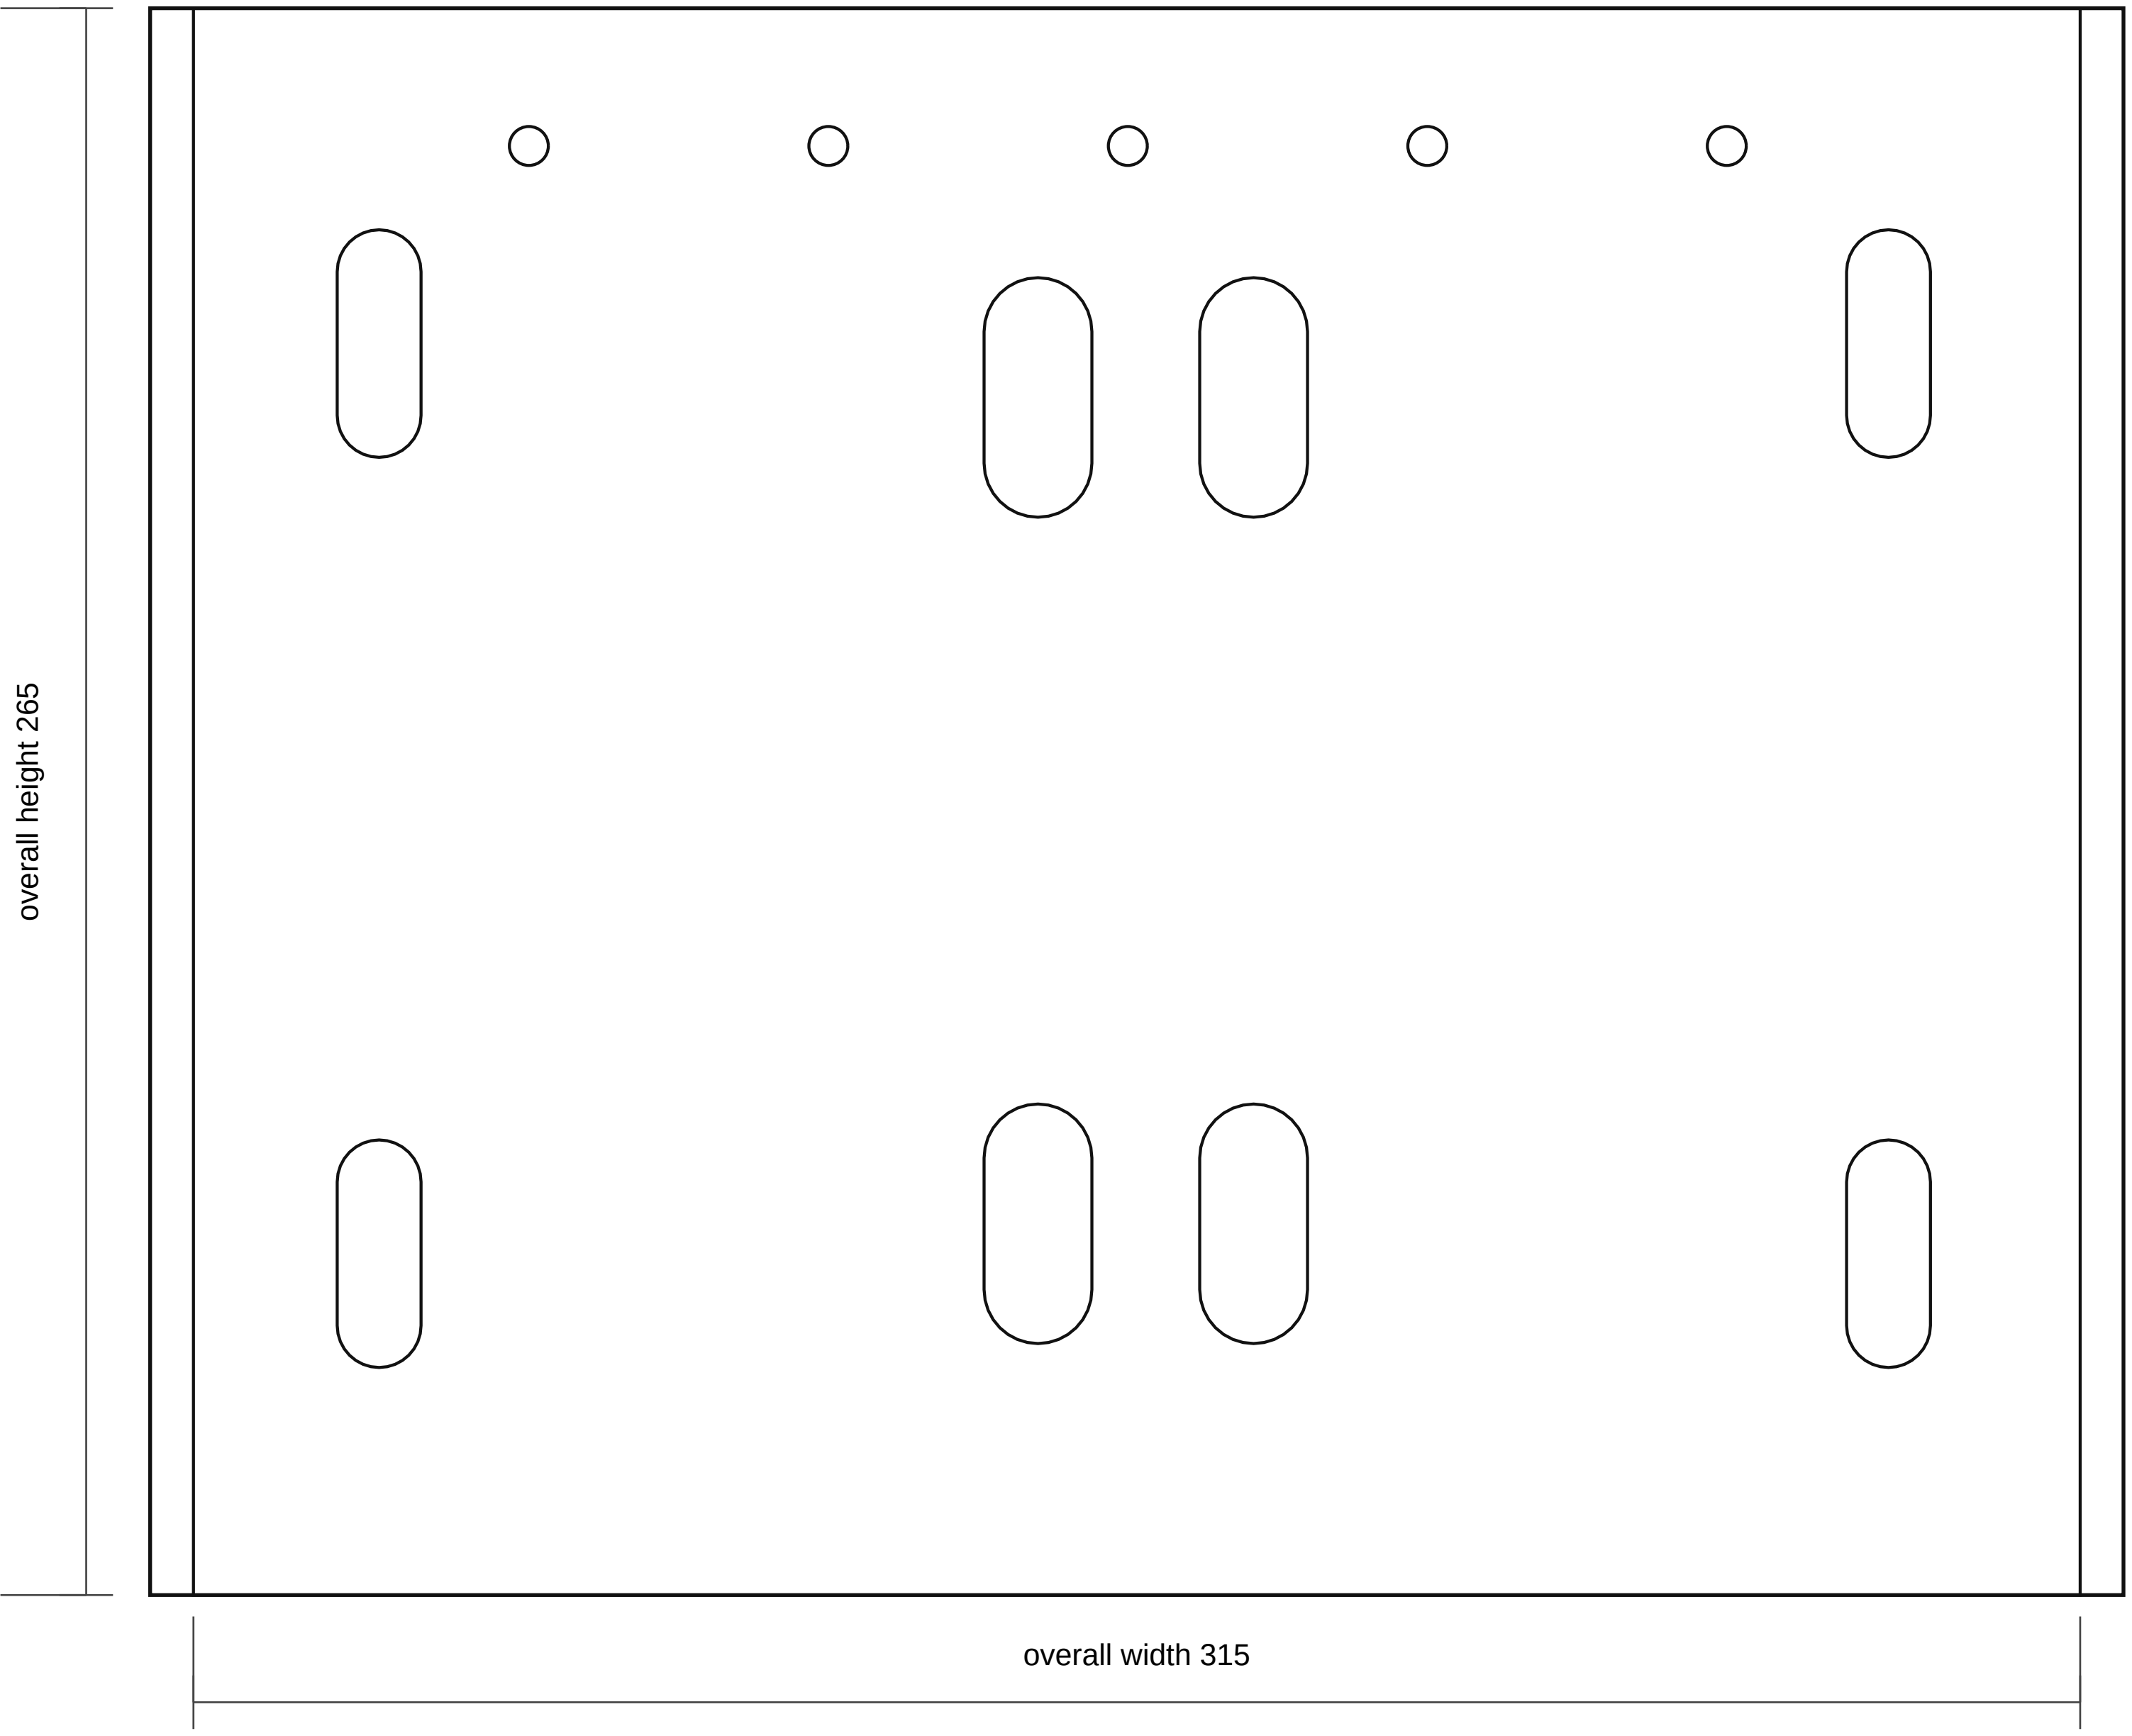

Fabrication Notes

- Compact battery stand top tray: 315 x 265 x 3.0 mm mild steel tray/deck around the 275 x 230 mm battery datum with service allowance.
- Electrical equipment uses its own compact carriers: folded relay tray, open MIDI plate/subplate, and independent cutoff tab. Do not use tray skin as a large backplane.
- Final battery footprint, terminal side, clamp path, bonnet clearance, front-cavity clearance, and LHD steering-side clearance are vehicle-measurement holds.
- Add an acid-resistant battery mat after paint; do not allow battery case or terminals to touch live studs or sharp steel edges.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: battery_stand_compact_top_tray_rev_b.dxf
- SVG: battery_stand_compact_top_tray_rev_b.svg

battery_stand_compact_single_chassis_pickup_rev_b

Rev B | Units: mm | Site-fit fabrication sheet

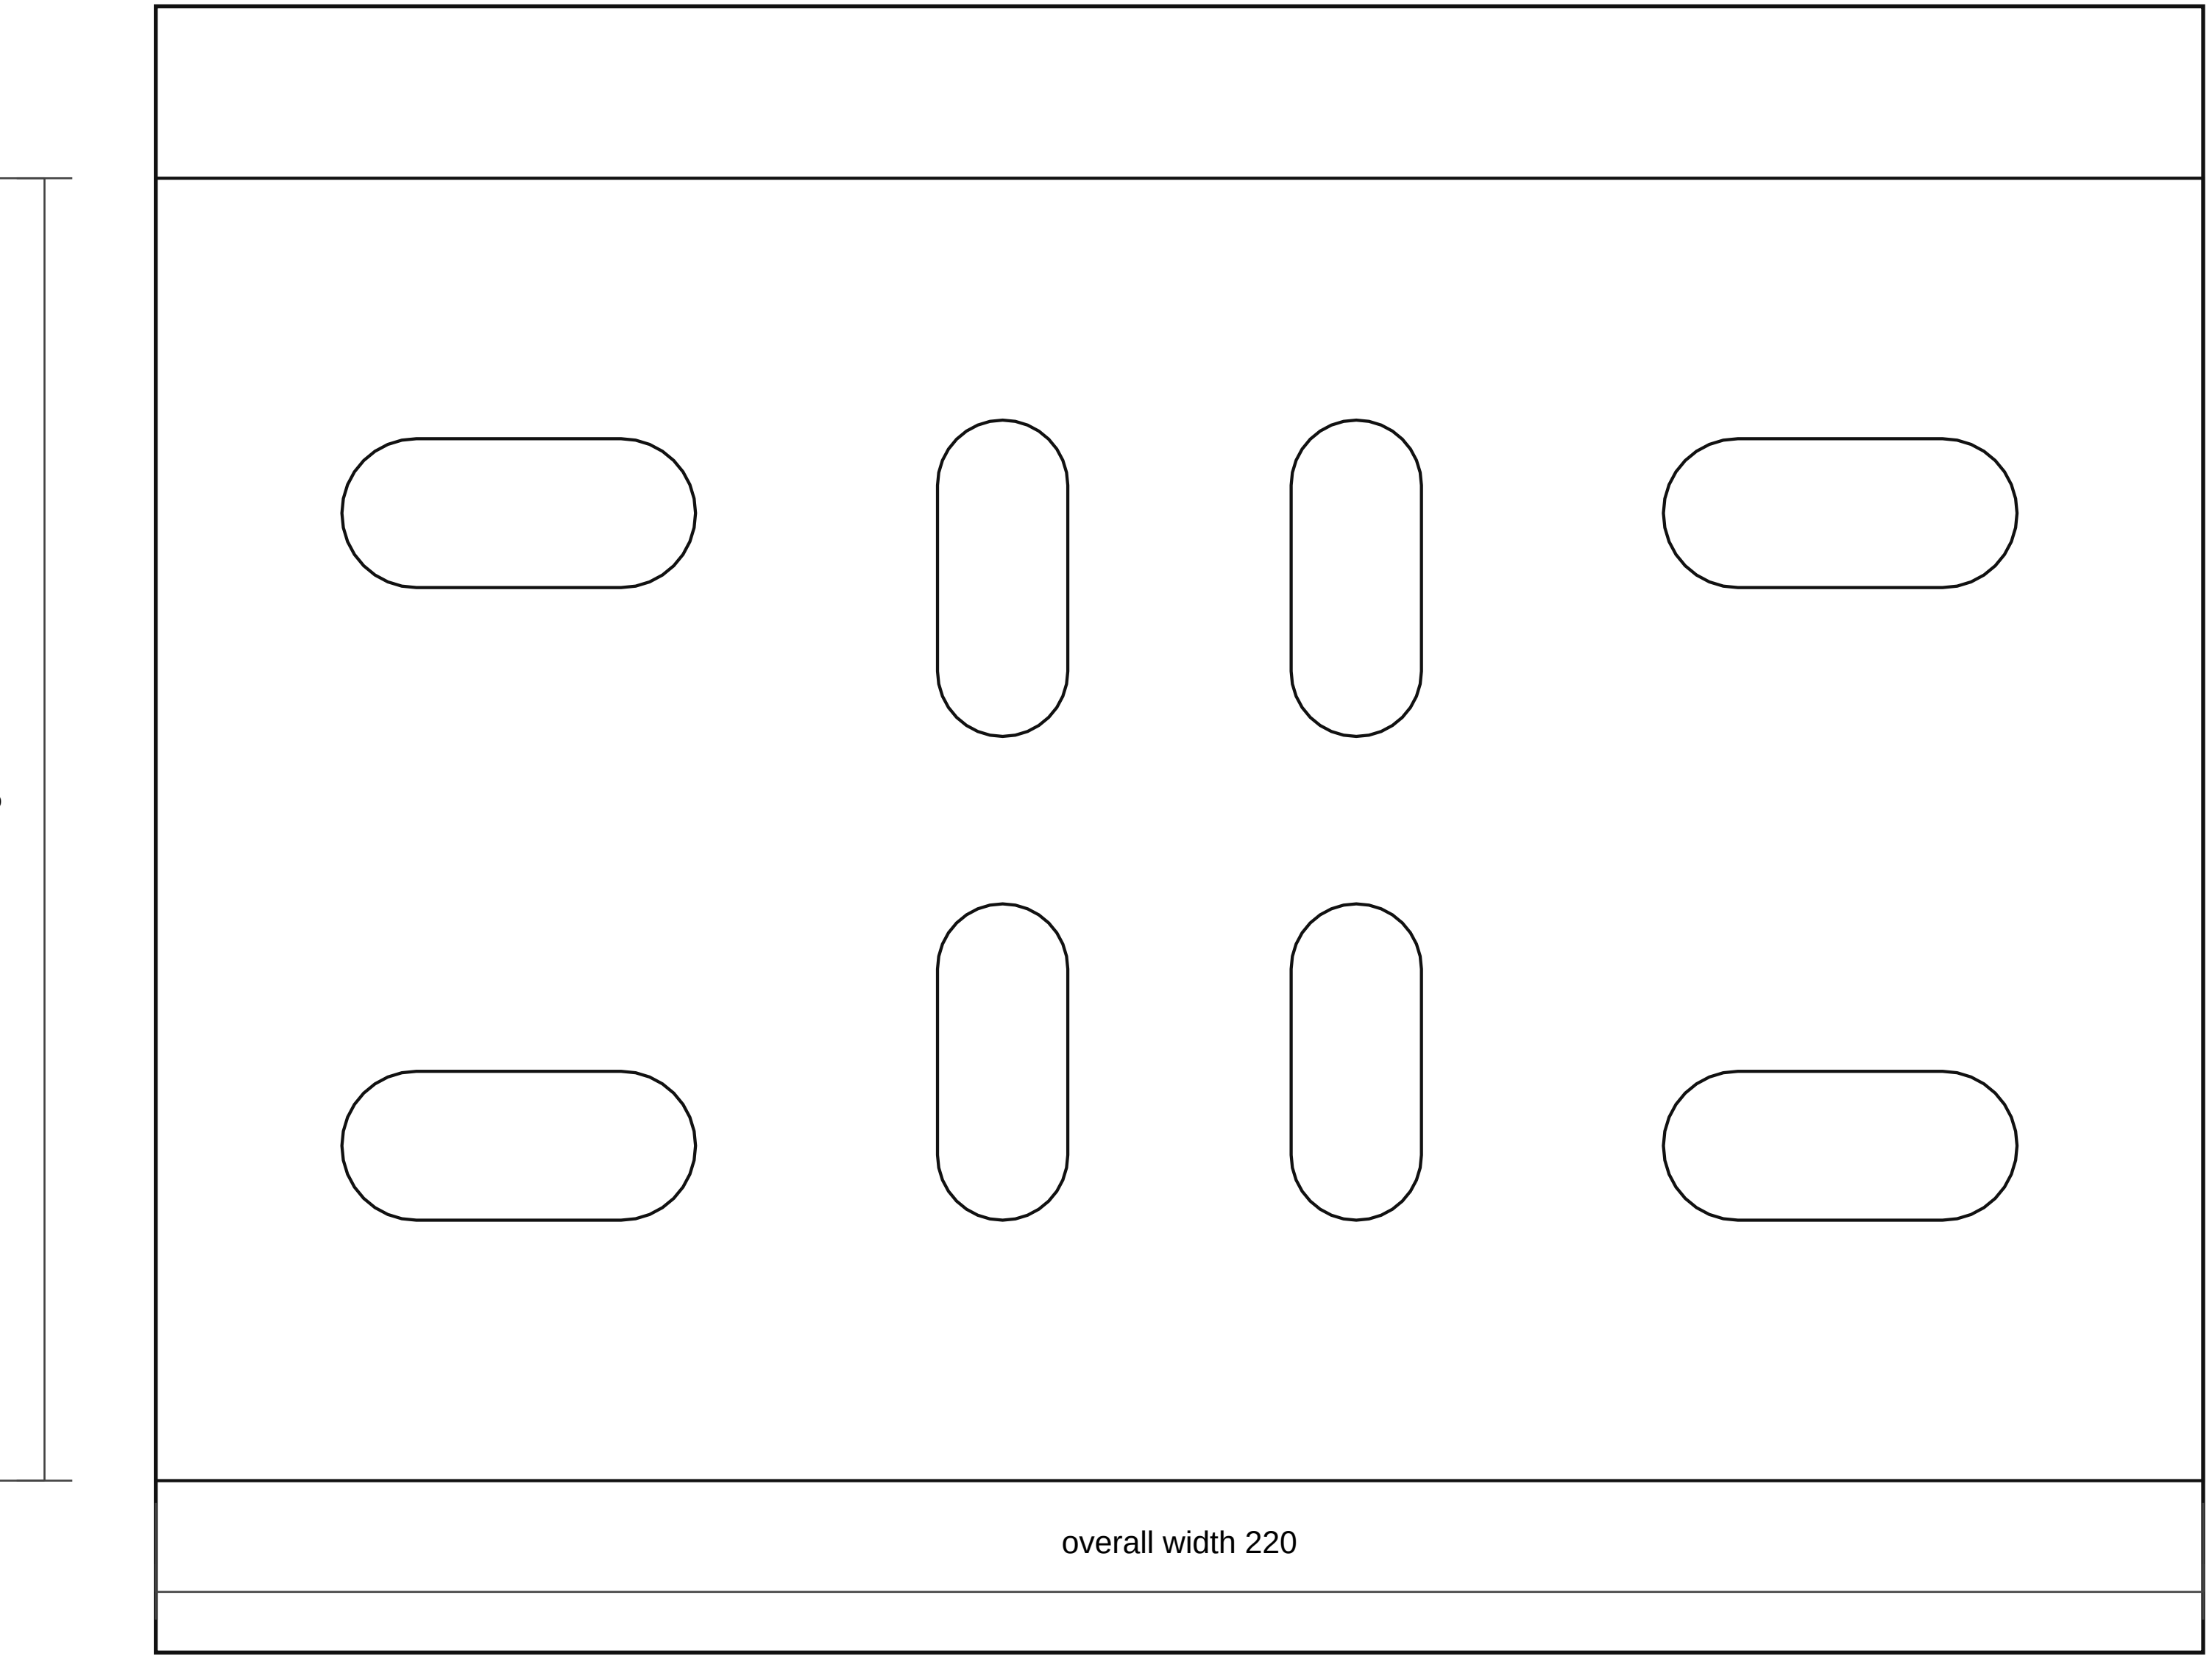

Fabrication Notes

- Compact single chassis pickup mount: 220 x 140 x 4.0 mm mild steel base plate for the one known vehicle-side chassis attachment location.
- Chassis slots are site-fit only. Record the actual chassis hole pitch, metal thickness, and access before cutting final steel.
- Upright/service-rail slots take the carrier stand; do not add an independent second chassis fixing unless dry-fit proves the single-pickup route is not stiff enough.
- Use crush tubes/spacers if bolting through boxed structure. Deburr, prime, and protect before final assembly.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: battery_stand_compact_single_chassis_pickup_rev_b.dxf
- SVG: battery_stand_compact_single_chassis_pickup_rev_b.svg

battery_stand_compact_single_mount_upright_rev_b

Rev B | Units: mm | Site-fit fabrication sheet

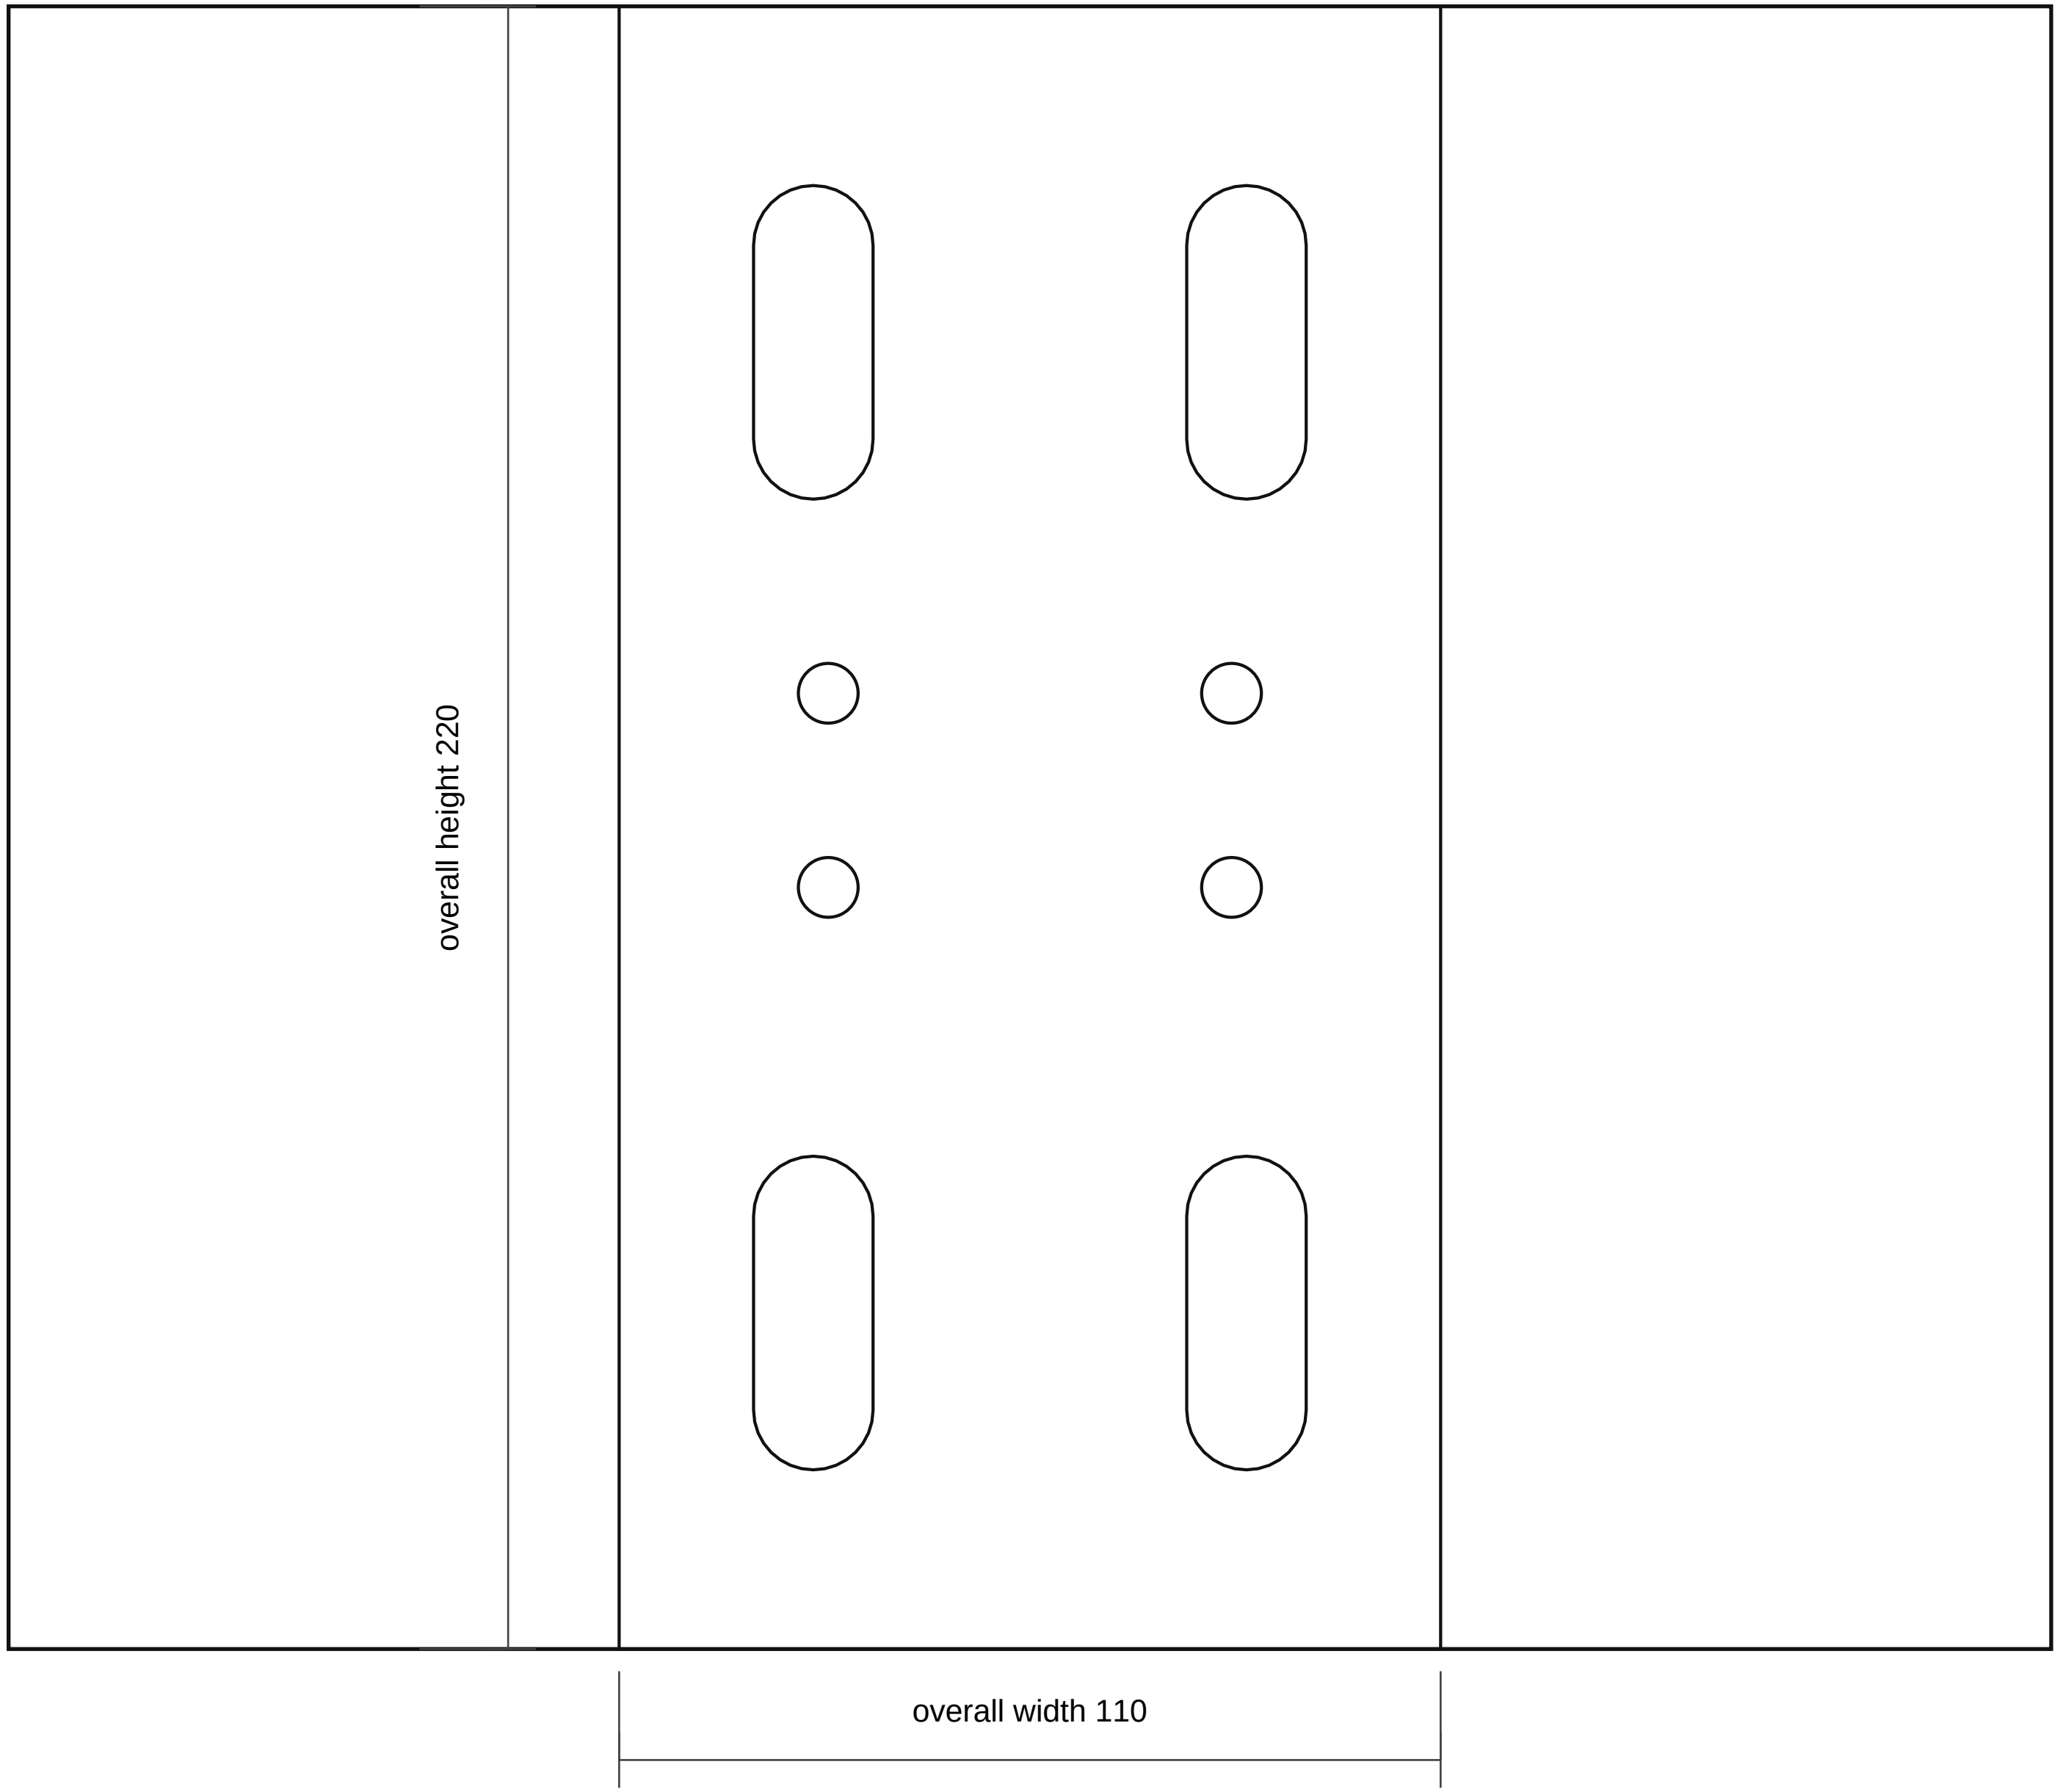

Fabrication Notes

- Compact single-mount upright bridge side plate: 110 x 220 x 4.0 mm mild steel between the one chassis pickup and compact tray.
- Make two mirrored side plates around the single pickup bridge if the mock-up needs side-to-side stiffness. This is not a second chassis fixing location.
- Lower holes align to the single chassis pickup mount; upper holes align to the compact tray/front rail saddle.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: battery_stand_compact_single_mount_upright_rev_b.dxf
- SVG: battery_stand_compact_single_mount_upright_rev_b.svg

battery_stand_compact_hold_down_crossbar_rev_b

Rev B | Units: mm | Site-fit fabrication sheet

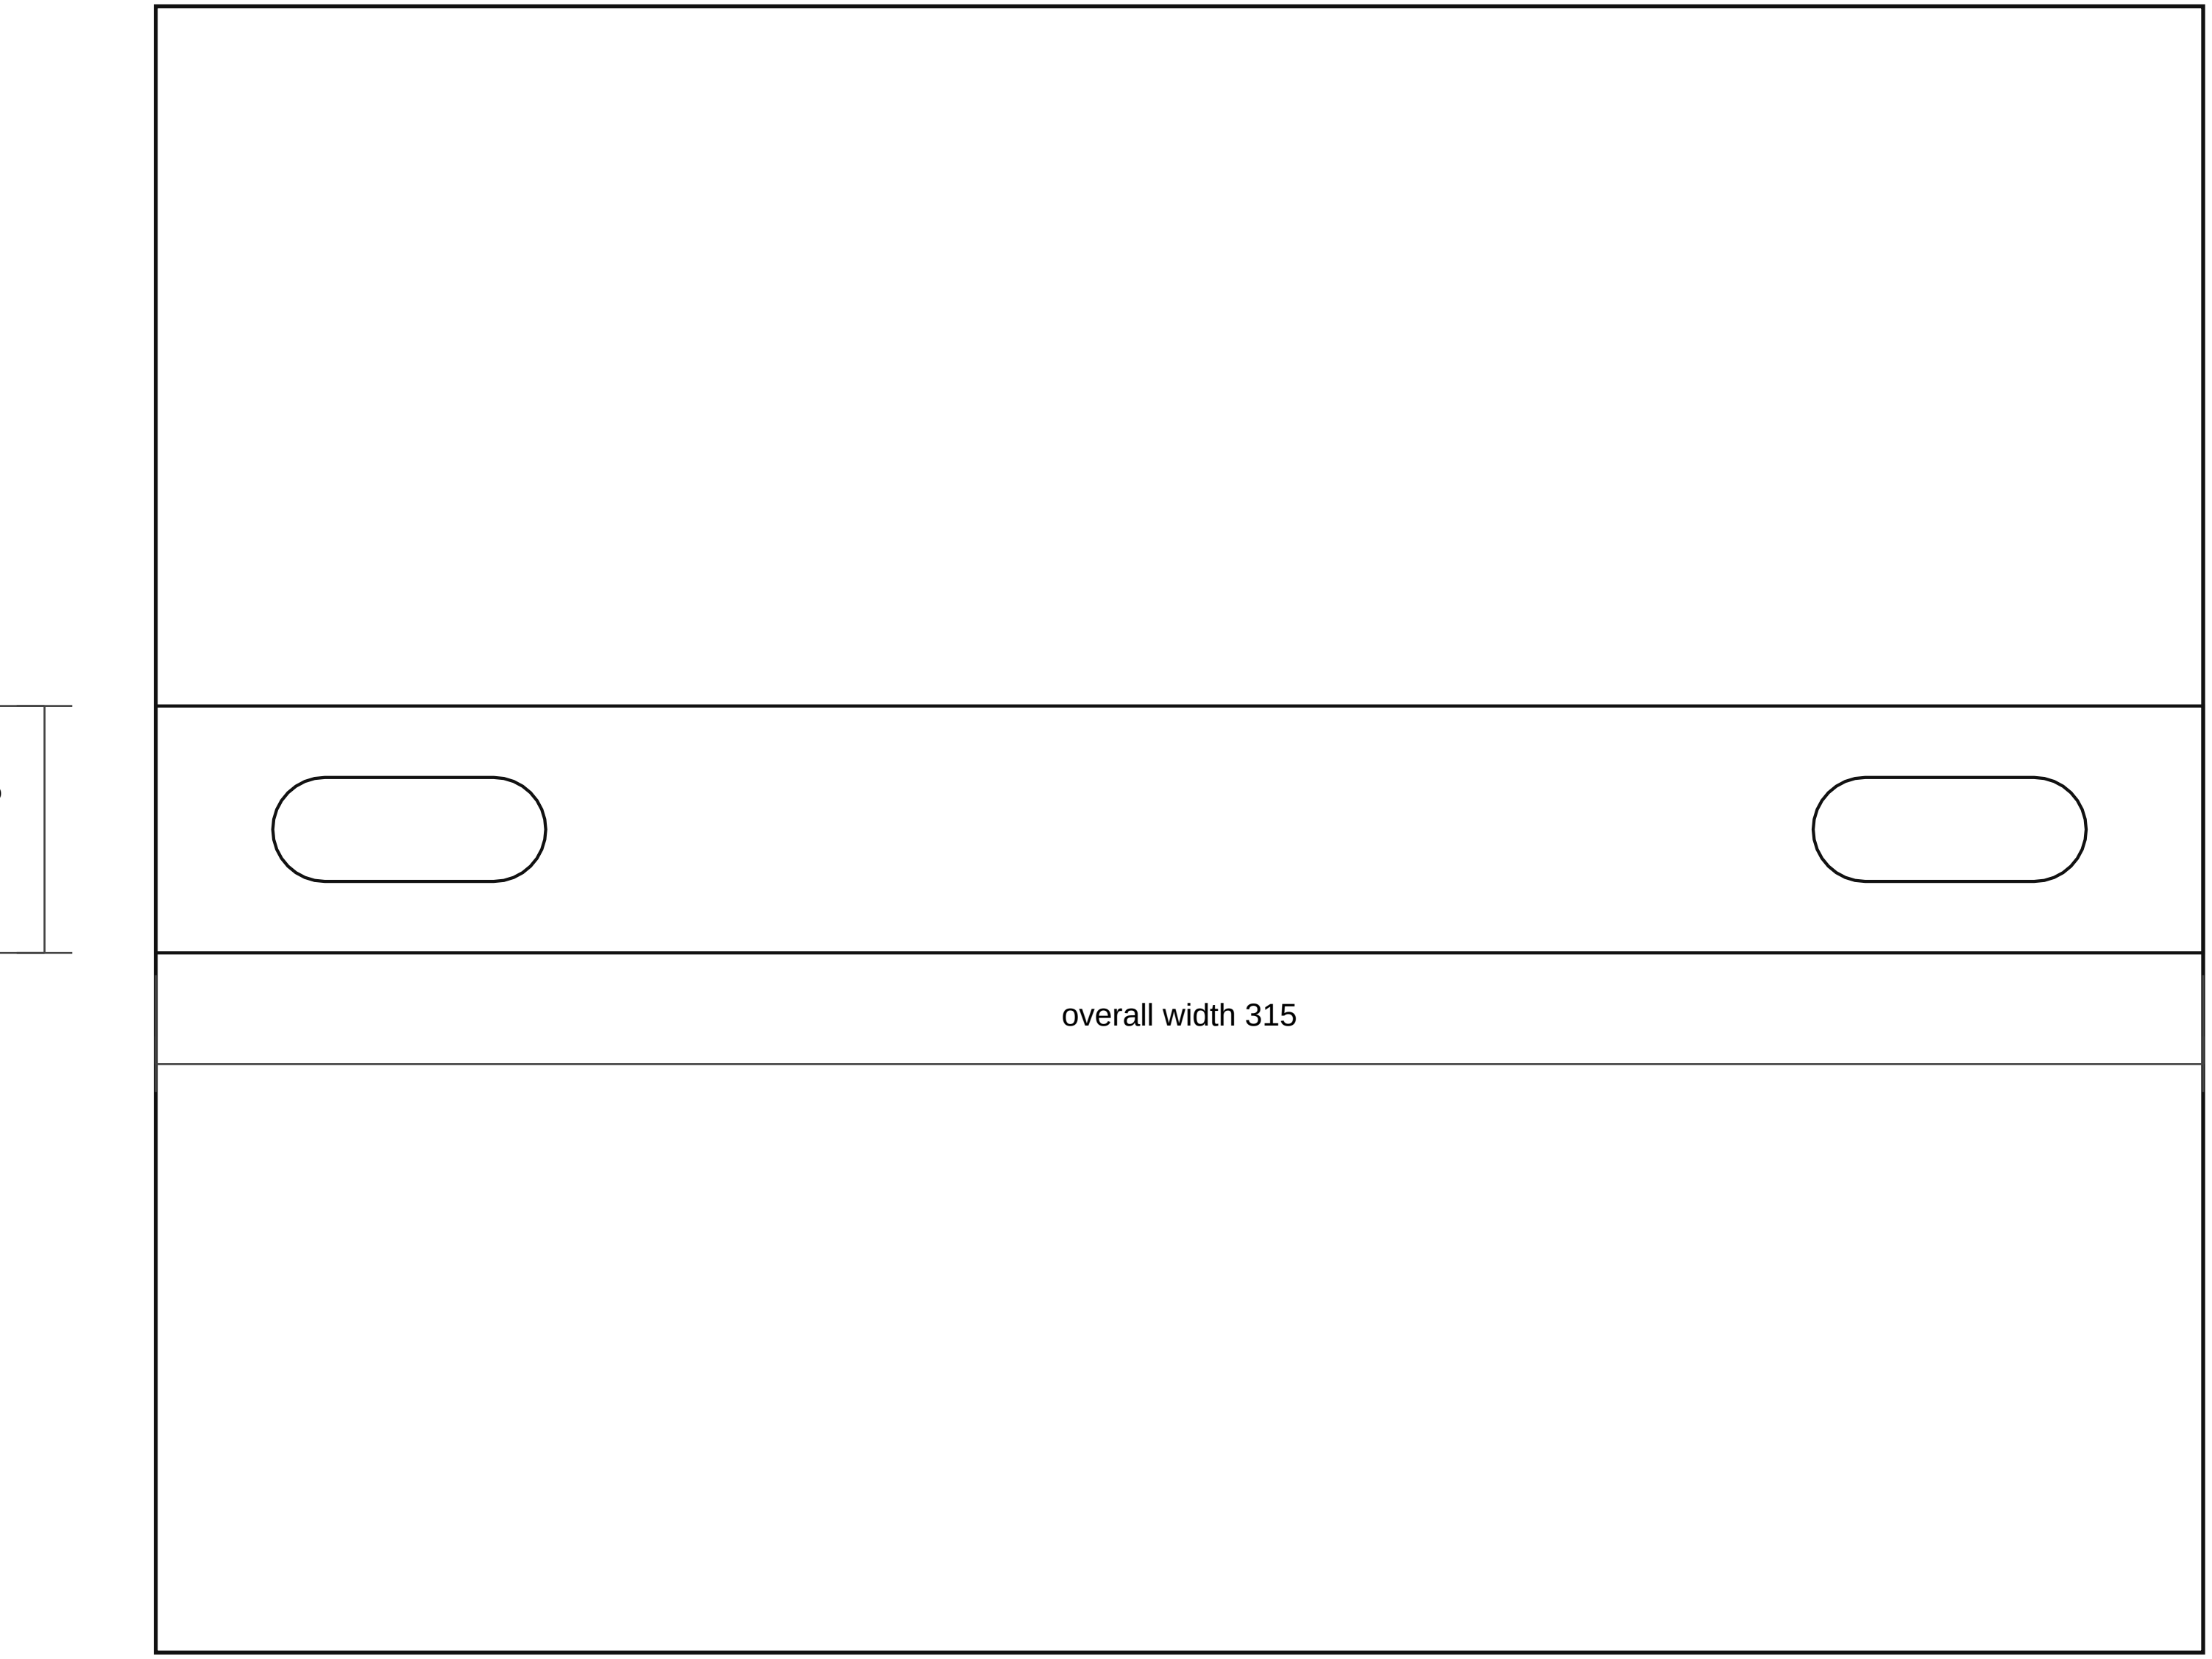

Fabrication Notes

- Compact battery hold-down crossbar: 315 x 38 x 3.0 mm mild steel or stainless. Length and slots are template values until the actual battery is measured.
- Use J-bolts or vertical rods that cannot touch battery terminals. Add insulated caps where needed.
- Do not over-tighten against a plastic battery case; retain the battery without distorting it.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: battery_stand_compact_hold_down_crossbar_rev_b.dxf
- SVG: battery_stand_compact_hold_down_crossbar_rev_b.svg

battery_power_compact_cutoff_tab_rev_b

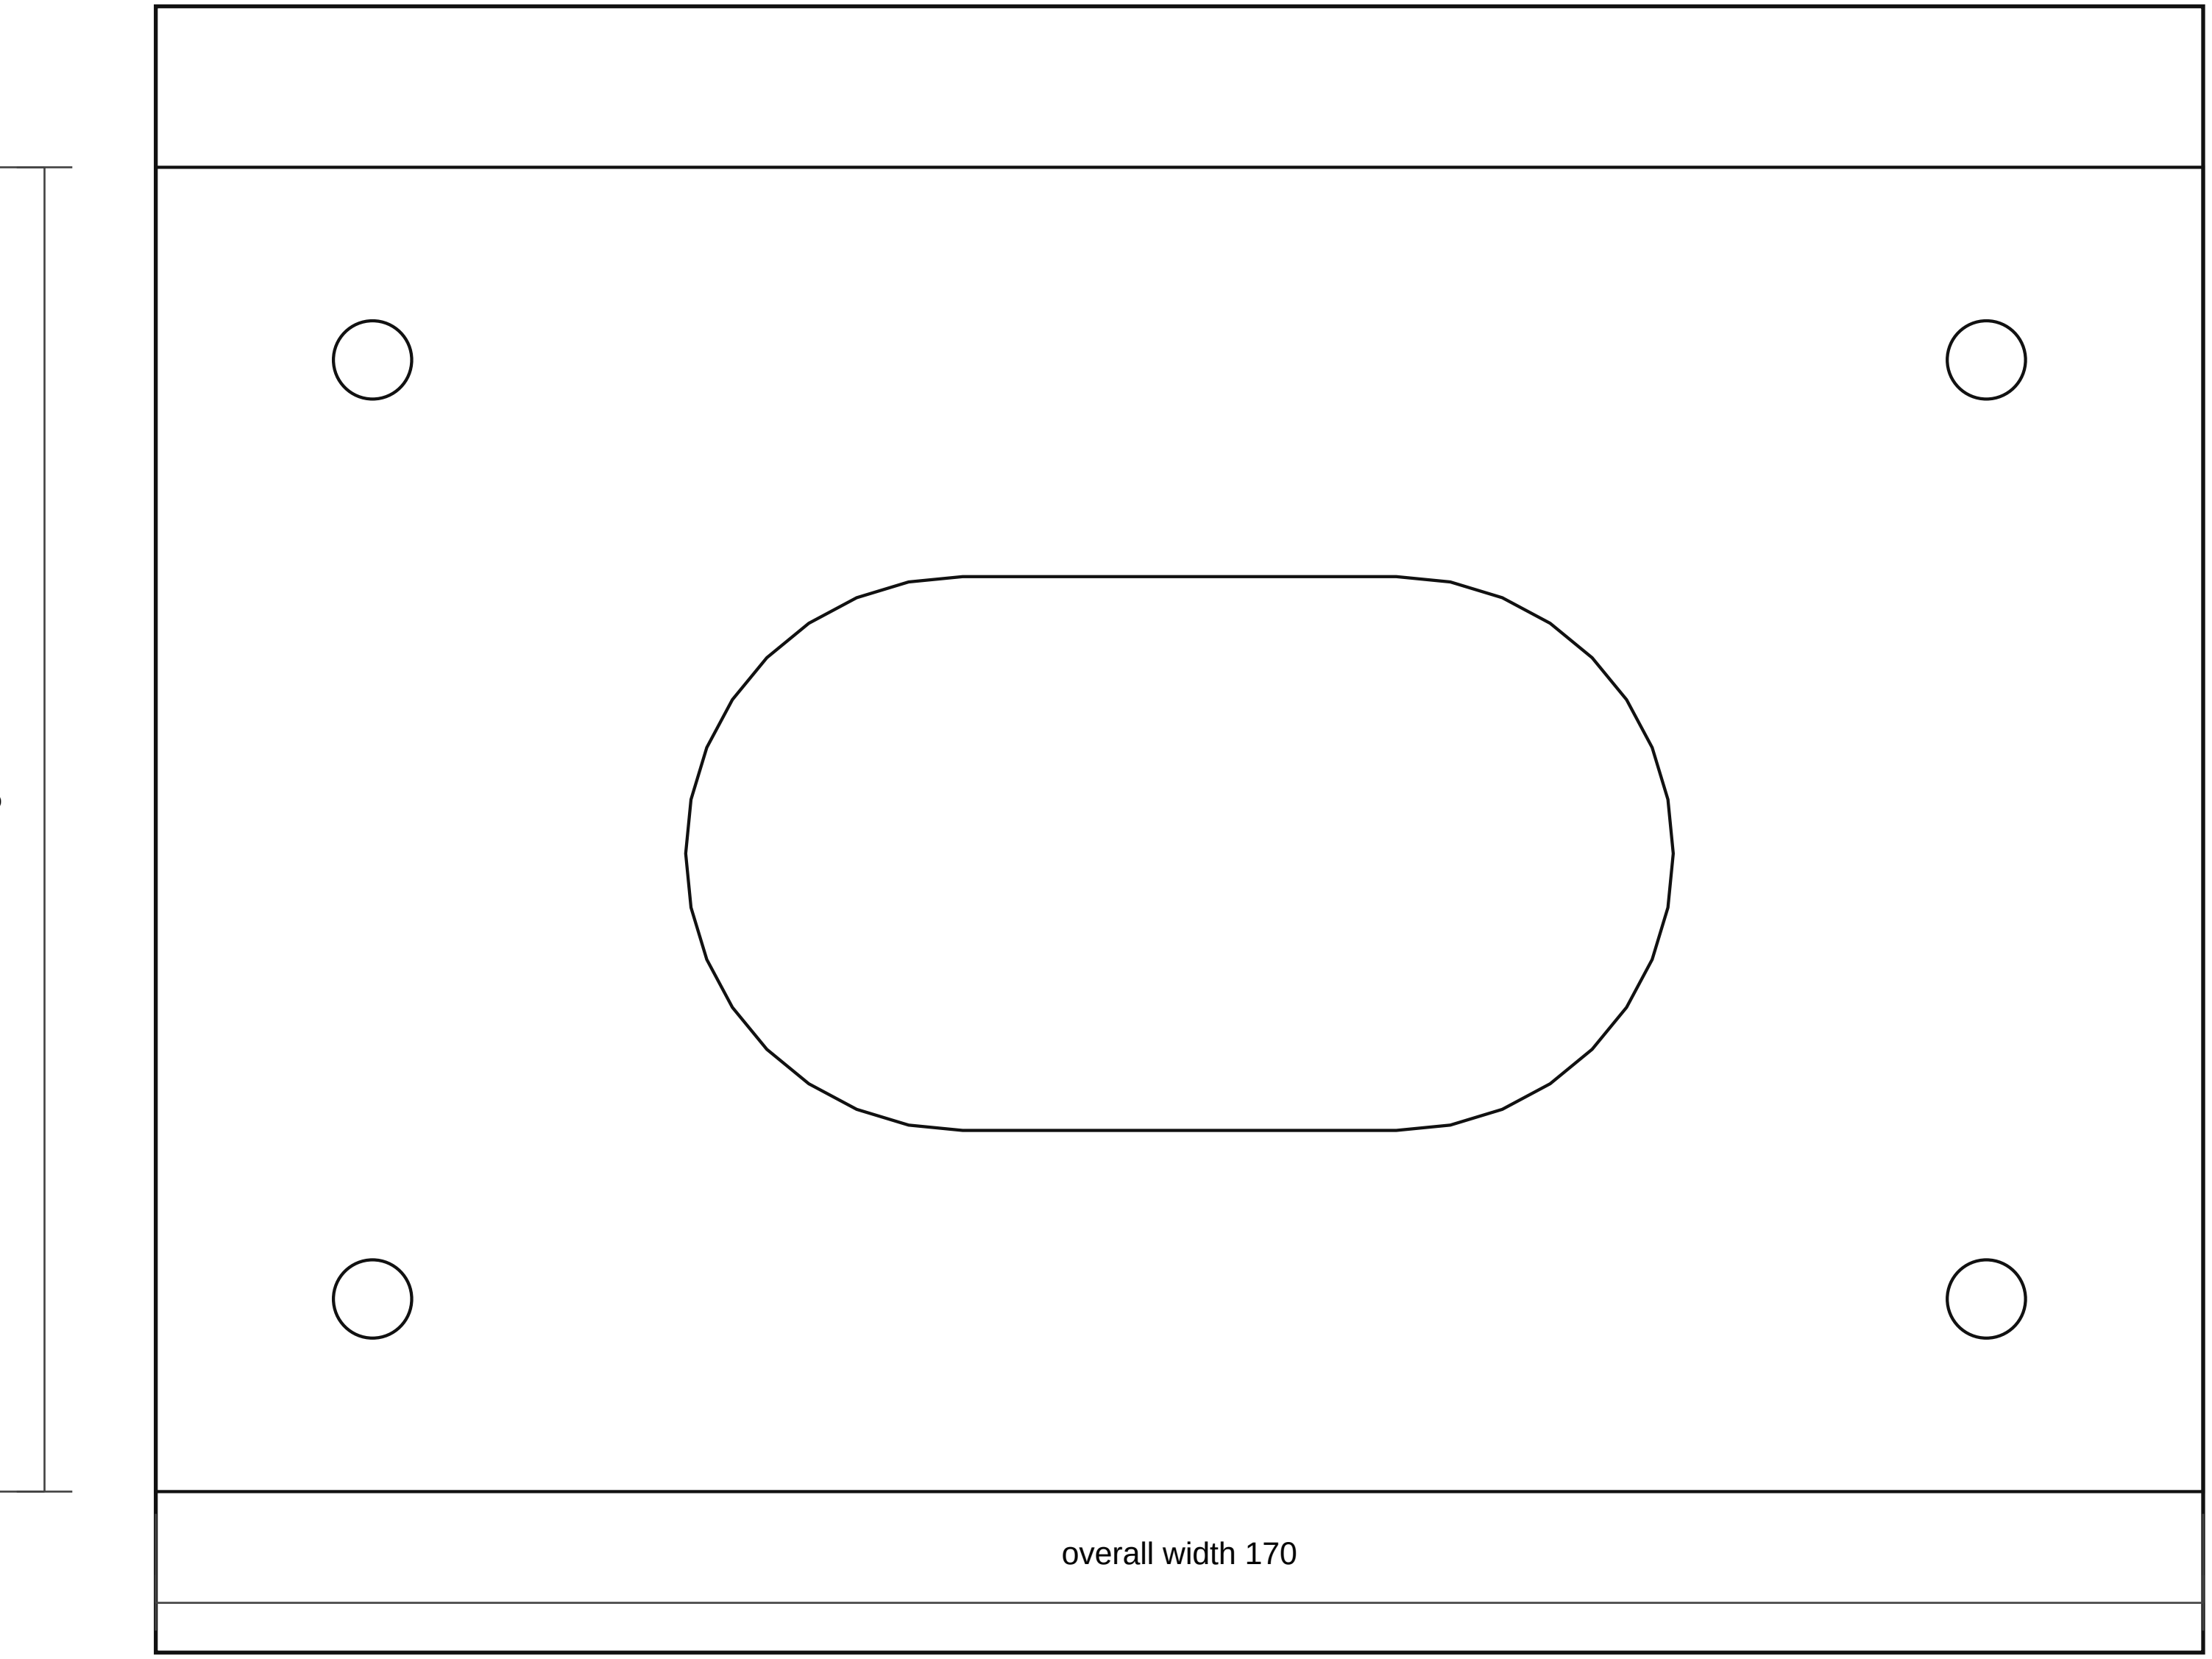

Fabrication Notes

- Compact cutoff tab/guard: 170 x 110 x 2.0-3.0 mm aluminium or plastic; place independently in the most accessible front/top cavity.
- Open the switch hole only after the actual switch body, key/knob sweep, terminal studs, and cable-lug depth are measured.
- Guard must not trap water, block emergency access, or sit where the bonnet or battery terminal service envelope can contact it.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: battery_power_compact_cutoff_tab_rev_b.dxf
- SVG: battery_power_compact_cutoff_tab_rev_b.svg