


J40 RHD Centre LCD / HVAC Fascia - Rev C

Units mm | Quote + template release | Vehicle cutting HOLD

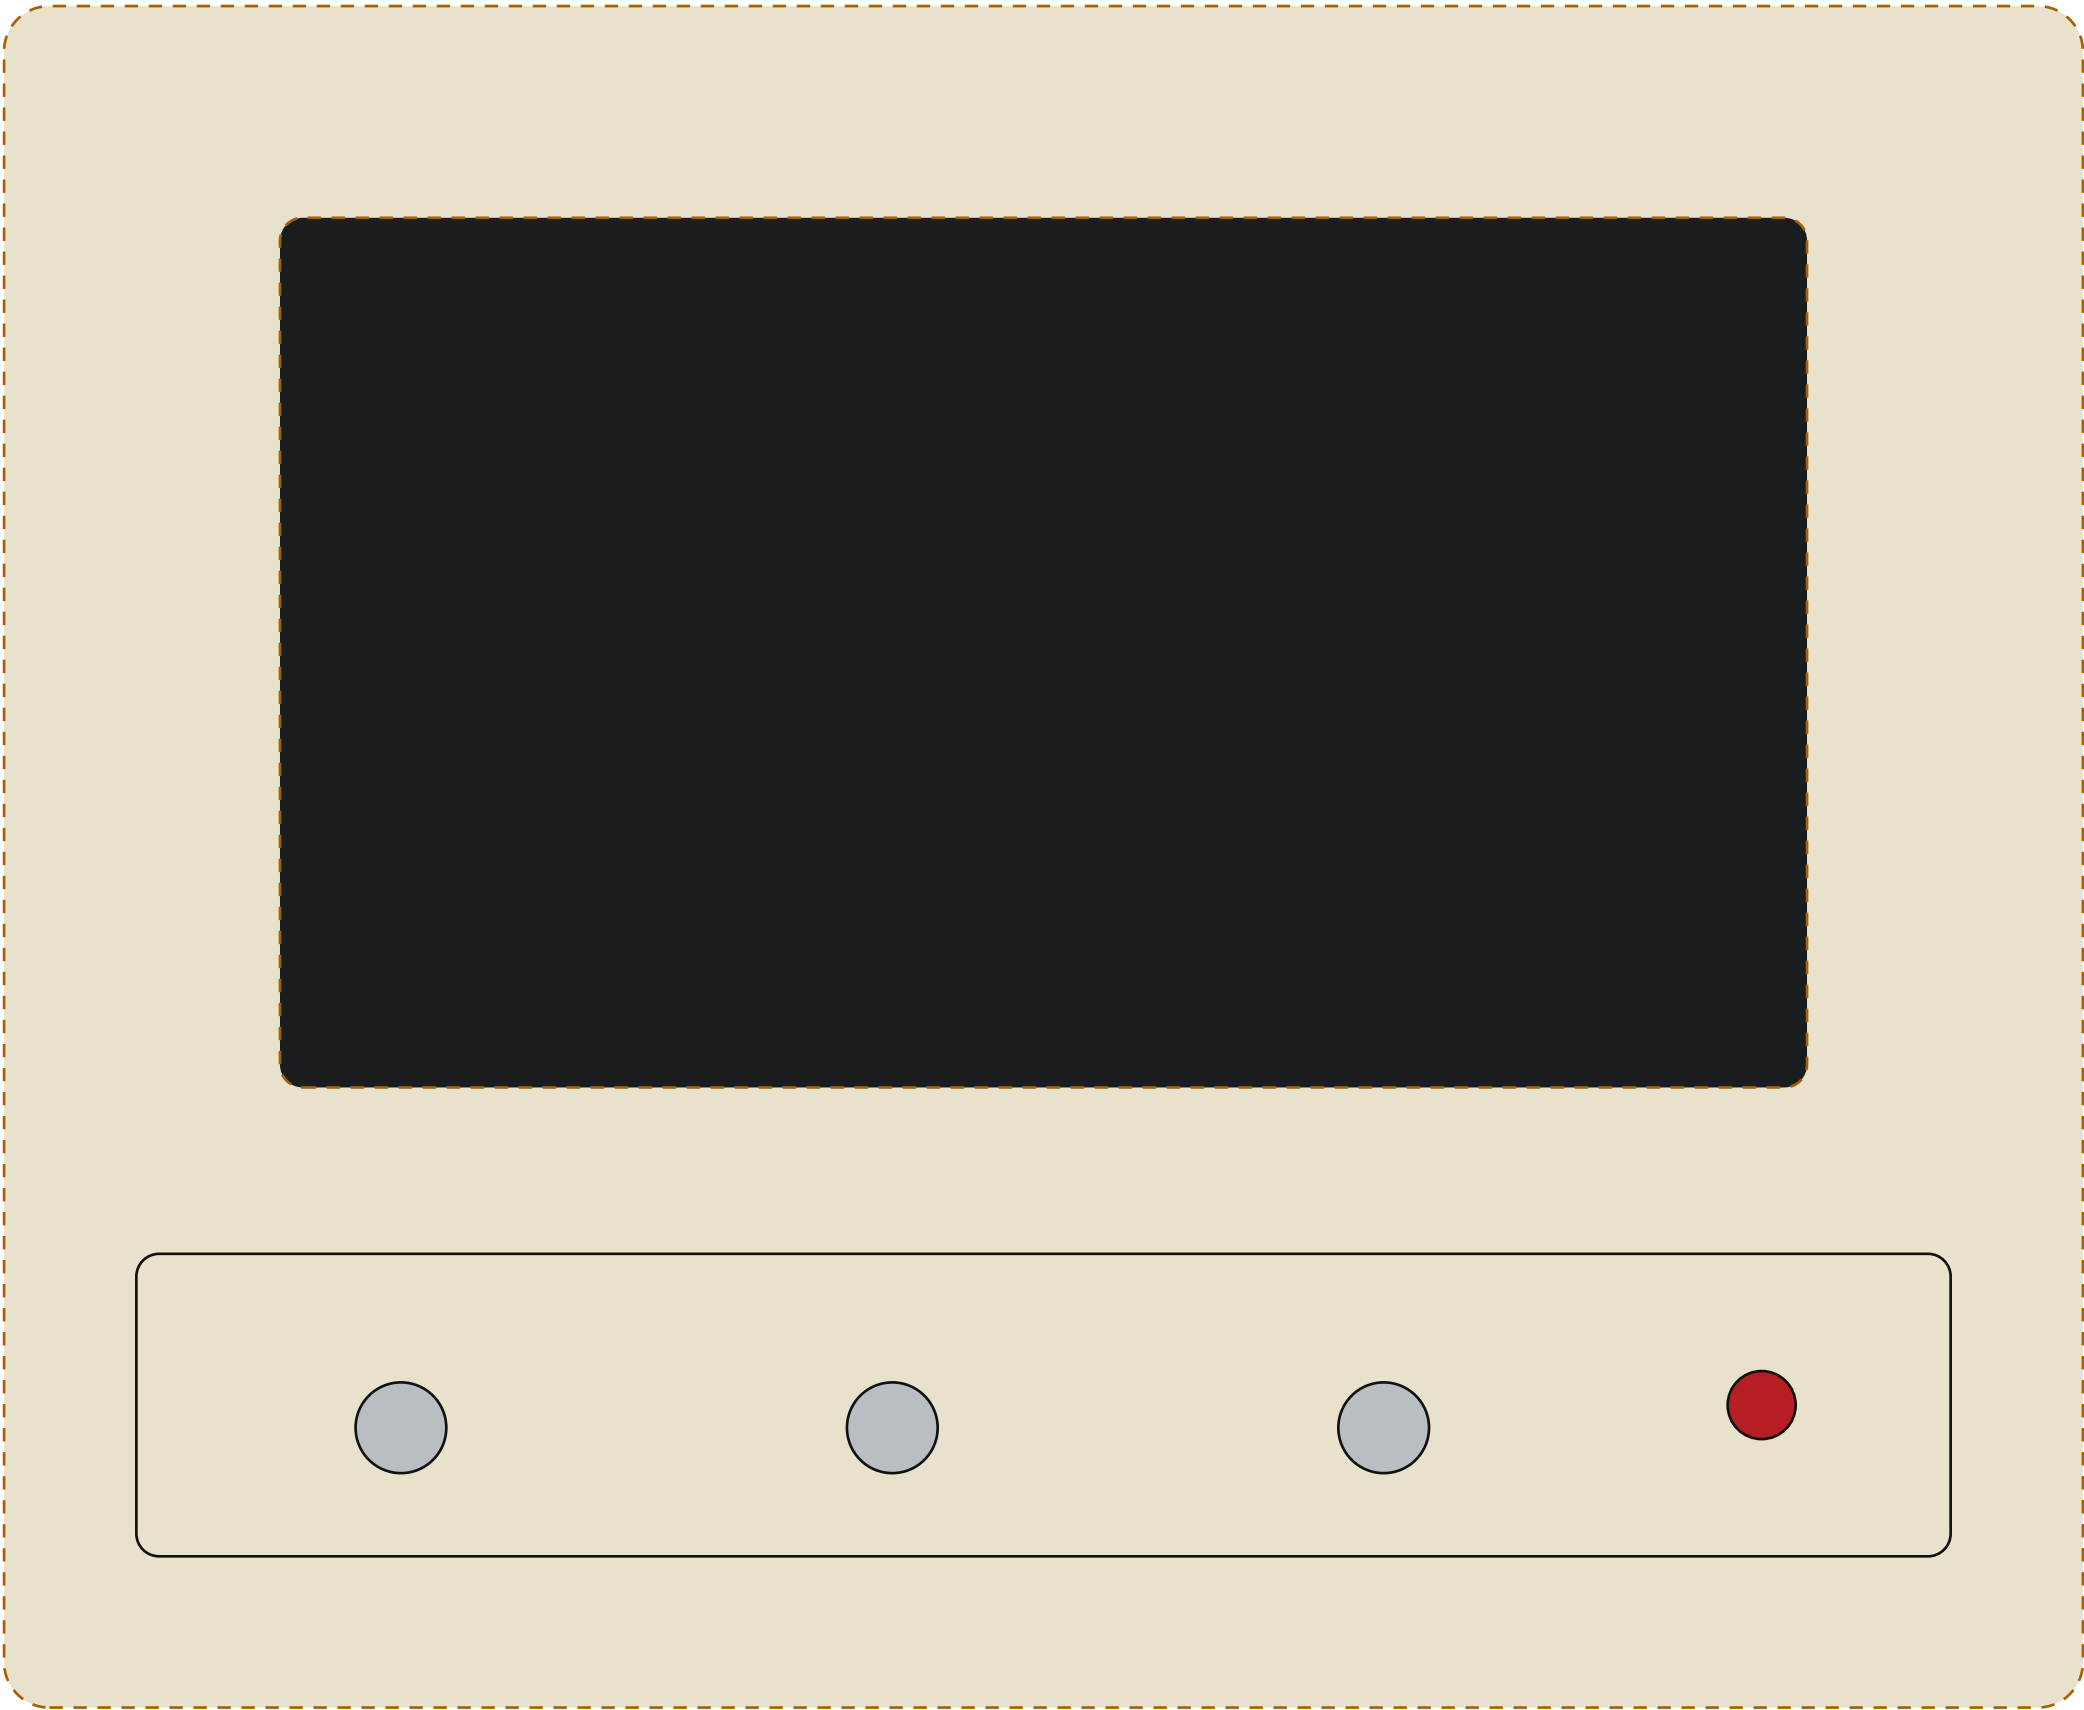

CONTROLLED SCOPE

Right-hand-drive vehicle: instrument/speedometer pressing stays original.

Left glovebox, instruction plate and small compartment stay original.

Remove ashtray; modify only existing centre radio/ashtray footprint.

Nominal fascia envelope 275 x 225 x 1.5 CR4 steel - template controlled.

9-inch 16:9 active reference: 199.2 x 112.1; nominal aperture 202 x 115.

Centre strip: three 22 mm selectors plus separate red hazard button.

Right original 2 x 2 cluster: four further 22 mm selectors.

Two eyeball vents mount separately under dash; no new main-face vent cuts.

Preferred vent connection: 63.5 / 2.5-inch hose after neck trial fit.

HOLD BEFORE METAL OR VEHICLE CUT

M1 centre contour/lands; M2 actual LCD drawing and dimensions

M3 LCD rear body/mount/connectors; M4 seven selector stacks

M5 transfer four right-cluster centres; M6 vent and hose geometry

M7 full rear/driver control sweep and signed 1:1 prototype

M8 labels, continuity, relay map, A/C safety and fuel-stop prove-out

Orange/dashed geometry and all HOLD_* DXF layers are reference only. Do not cut them until the release schedule is signed.

Design intent on owner's actual RHD dashboard

Concept overlay - do not scale

WHAT CHANGES

1. Ashtray and centre radio openings become one body-colour CNC insert.
2. True 9-inch LCD occupies the upper centre insert.
3. Three selectors sit below LCD; four reuse the original right-hand 2 x 2 holes.
4. Hazard stays separate; two directional A/C vents mount below the dash.

WHAT DOES NOT CHANGE

- Left glovebox and its instruction plate
- Small original compartment beside glovebox
- Right speedometer/instrument pressing and steering-column notch
- Four original switch positions to the right of the instruments
- Outer dash sheet metal and character lines

The photograph establishes intent, not dimensions.

Final geometry comes from the vehicle template and actual parts.

PROVISIONAL ELECTRICAL ALLOCATION

3-position: WIPERS, LIGHTS, BLOWER

2-position: SPOTS, AUX, A/C REQUEST, FUEL STOP / CONTROL

Selectors drive protected relay/control circuits - not high-current loads.

A/C request remains interlocked by pressure/trinary chain before relay B1.

Fuel-stop is HOLD pending live prove-out; retain the manual stop cable.

