


BM-ISO-SM small square body isolator pad

Rev A | units: mm | rubber recreation fabrication pack

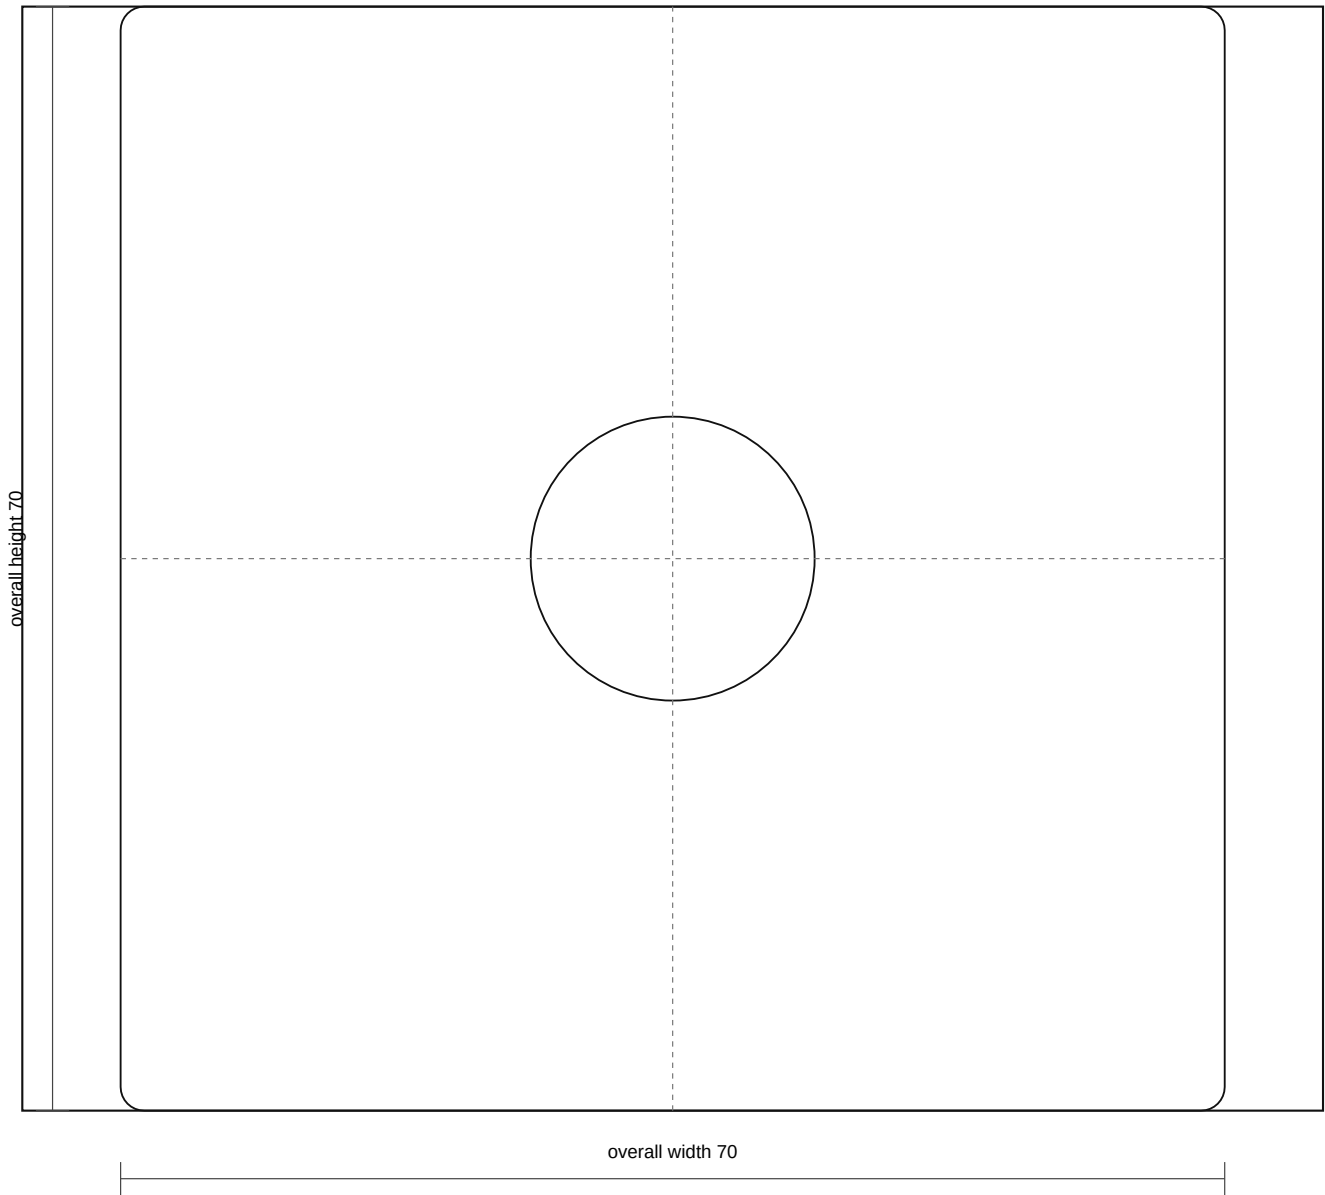

Part Control

- Quantity: 10 plus 2 spares
- Material: Black EPDM or NR/SBR, Shore A 60 +/-5
- Release: released for quote and first article; station fit and compression checked
- DXF: bm_iso_sm_square_pad_rev_a.dxf
- SVG: bm_iso_sm_square_pad_rev_a.svg

Fabrication Notes

- Finished free height: 22 mm. The DXF is the top cut profile only; height is controlled by the PDF and cut list.
- Central through bore is 18.0 mm for Toyota 90560-12009 style sleeve clearance; this is a through cut.
- Plan corner radius target R1.5. Top/bottom perimeter edge break or chamfer target 1.0 mm max. Faces flat and parallel within 0.5 mm.
- This replaces the older circular BM-SM/BM-LG placeholder for the active Longman rubber order.


DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/Form/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

Output: j40_rubber_recreation_rev_a_dimension_sheet.pdf

BM-ISO-LG large square body isolator pad

Rev A | units: mm | rubber recreation fabrication pack

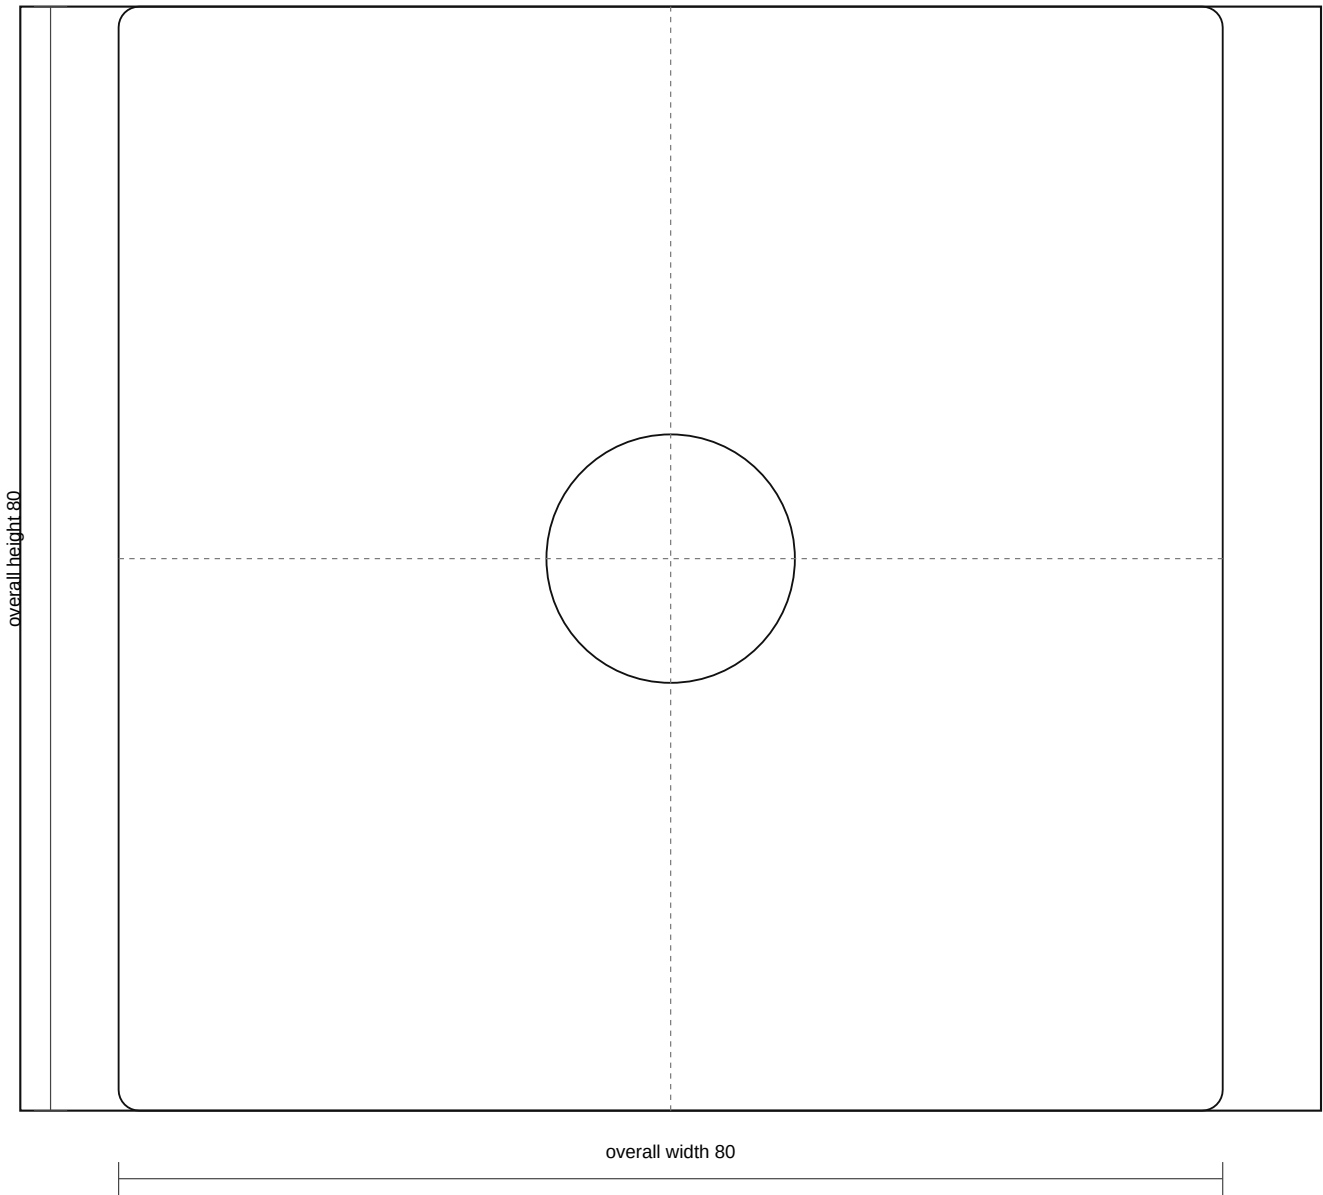

Part Control

- Quantity: 2 plus 1 spare
- Material: Black EPDM or NR/SBR, Shore A 60 +/-5
- Release: released for quote and first article; large-station fit and compression
- DXF: bm_iso_lg_square_pad_rev_a.dxf
- SVG: bm_iso_lg_square_pad_rev_a.svg

Fabrication Notes

- Finished free height: 24 mm. The DXF is the top cut profile only; height is controlled by the PDF and cut list.
- Central through bore is 18.0 mm for Toyota 90560-12009 style sleeve clearance; this is a through cut.
- Plan corner radius target R1.5. Top/bottom perimeter edge break or chamfer target 1.0 mm max. Faces flat and parallel within 0.5 mm.
- This replaces the older circular BM-SM/BM-LG placeholder for the active Longman rubber order.


DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/Form/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

Output: j40_rubber_recreation_rev_a_dimension_sheet.pdf

BM-CUP small body-mount cup washer

Rev A | units: mm | rubber recreation fabrication pack

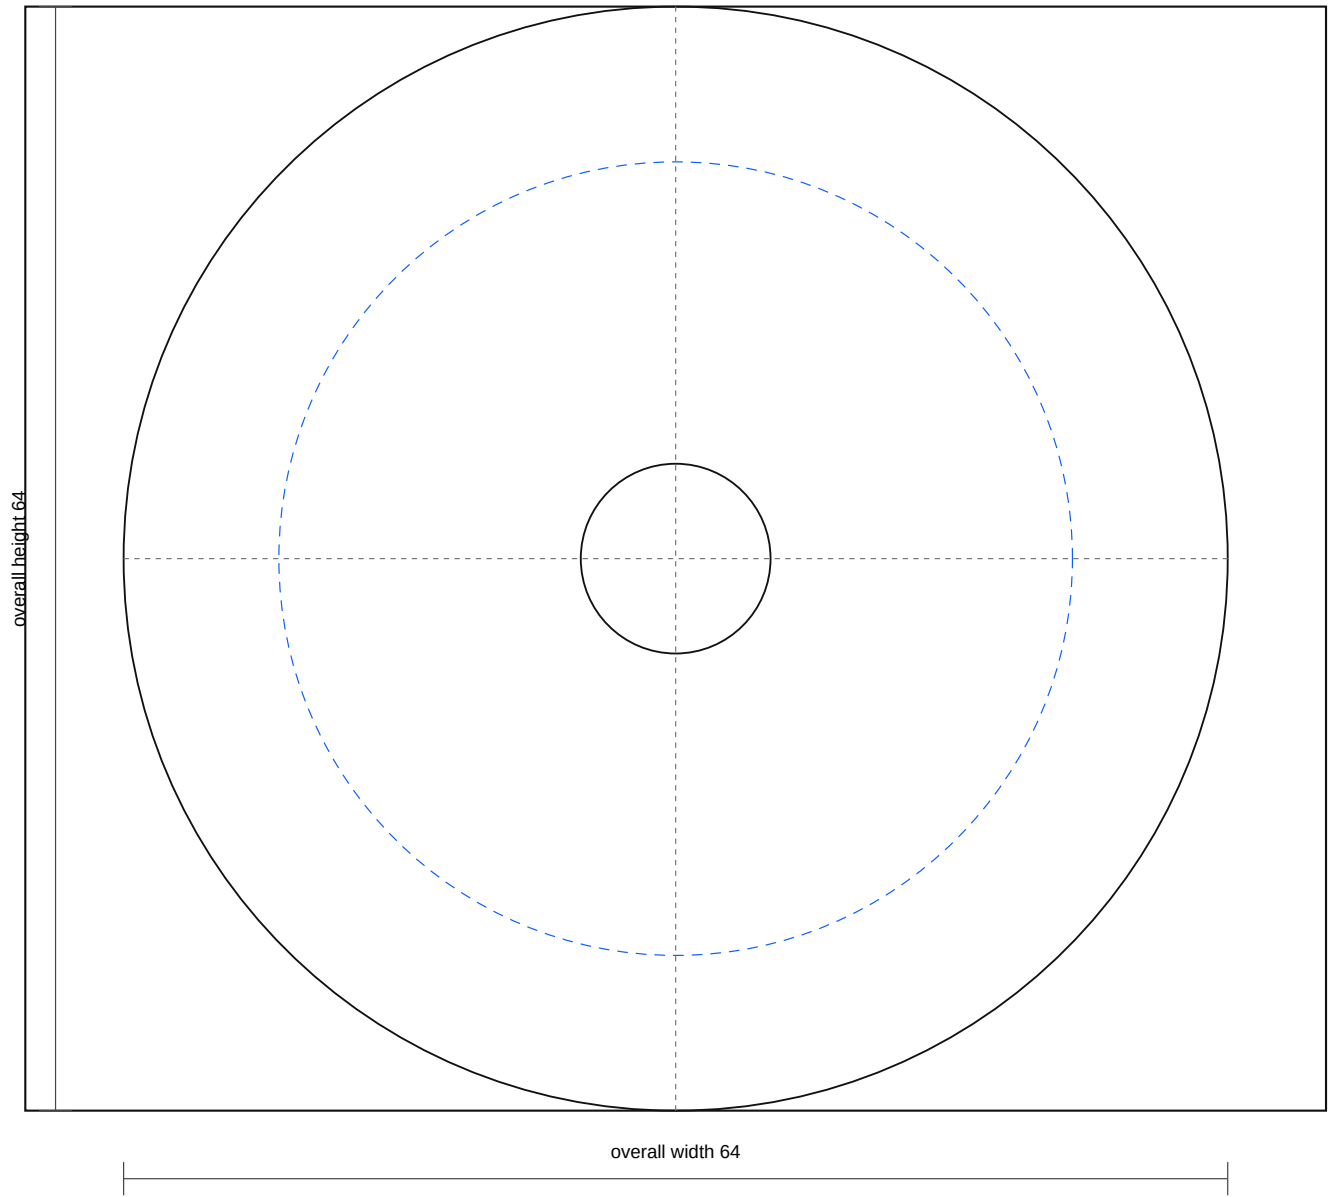

Part Control

- Quantity: 10 working basis
- Material: 2.5-3.0 mm steel, zinc plated or epoxy primed after forming
- Release: prototype/quote; confirm cup reuse and dish depth before batch
- DXF: bm_cup_small_seat_washer_rev_a.dxf
- SVG: bm_cup_small_seat_washer_rev_a.svg

Fabrication Notes

- M10 clearance hole is 11 mm through. The 46 mm circle is the register/dish forming line.
- Dish/register depth target is 2-3 mm after forming. Cup must seat the rubber without rocking.
- Reuse original cups only if flat, not thinned, and not cracked. Otherwise form new cups from these blanks.
- Deburr, plate/prime, and trial stack with the rubber cushion and sleeve before body installation.


DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/Form/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

Output: j40_rubber_recreation_rev_a_dimension_sheet.pdf

BM-CUP large body-mount cup washer

Rev A | units: mm | rubber recreation fabrication pack

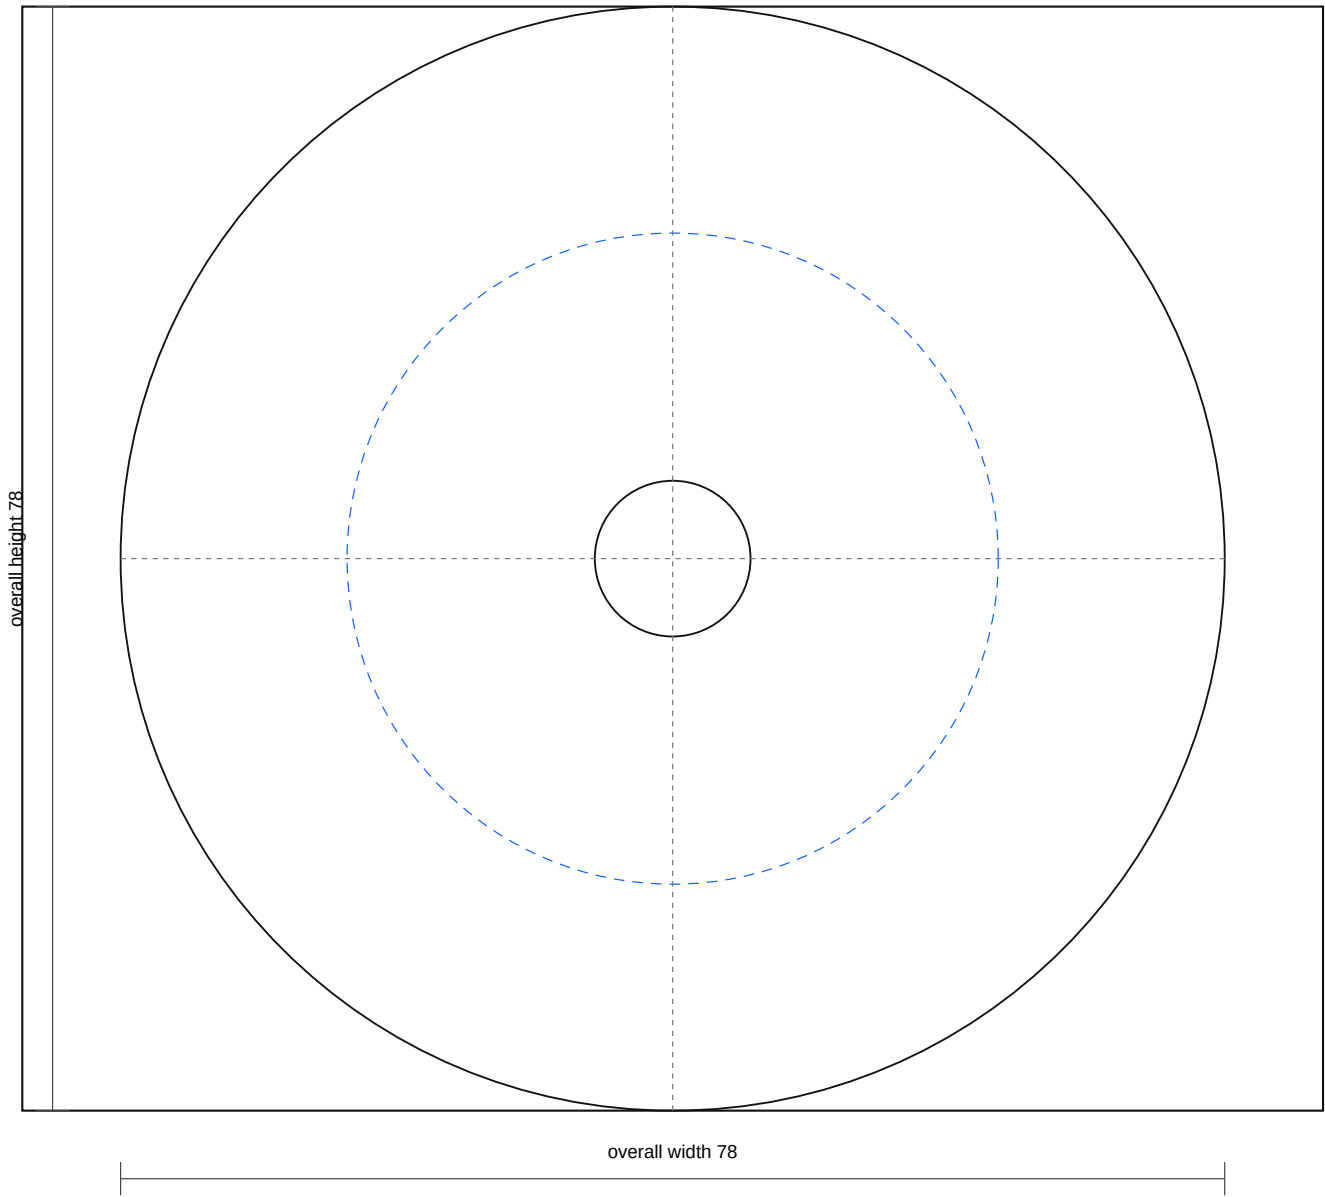

Part Control

- Quantity: 2 working basis
- Material: 2.5-3.0 mm steel, zinc plated or epoxy primed after forming
- Release: prototype/quote; confirm cup reuse and dish depth before batch
- DXF: bm_cup_large_seat_washer_rev_a.dxf
- SVG: bm_cup_large_seat_washer_rev_a.svg

Fabrication Notes

- M10 clearance hole is 11 mm through. The 46 mm circle is the register/dish forming line.
- Dish/register depth target is 2-3 mm after forming. Cup must seat the rubber without rocking.
- Reuse original cups only if flat, not thinned, and not cracked. Otherwise form new cups from these blanks.
- Deburr, plate/prime, and trial stack with the rubber cushion and sleeve before body installation.


DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/Form/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

Output: j40_rubber_recreation_rev_a_dimension_sheet.pdf

FS-OVAL front support two-hole isolator pad

Rev A | units: mm | rubber recreation fabrication pack

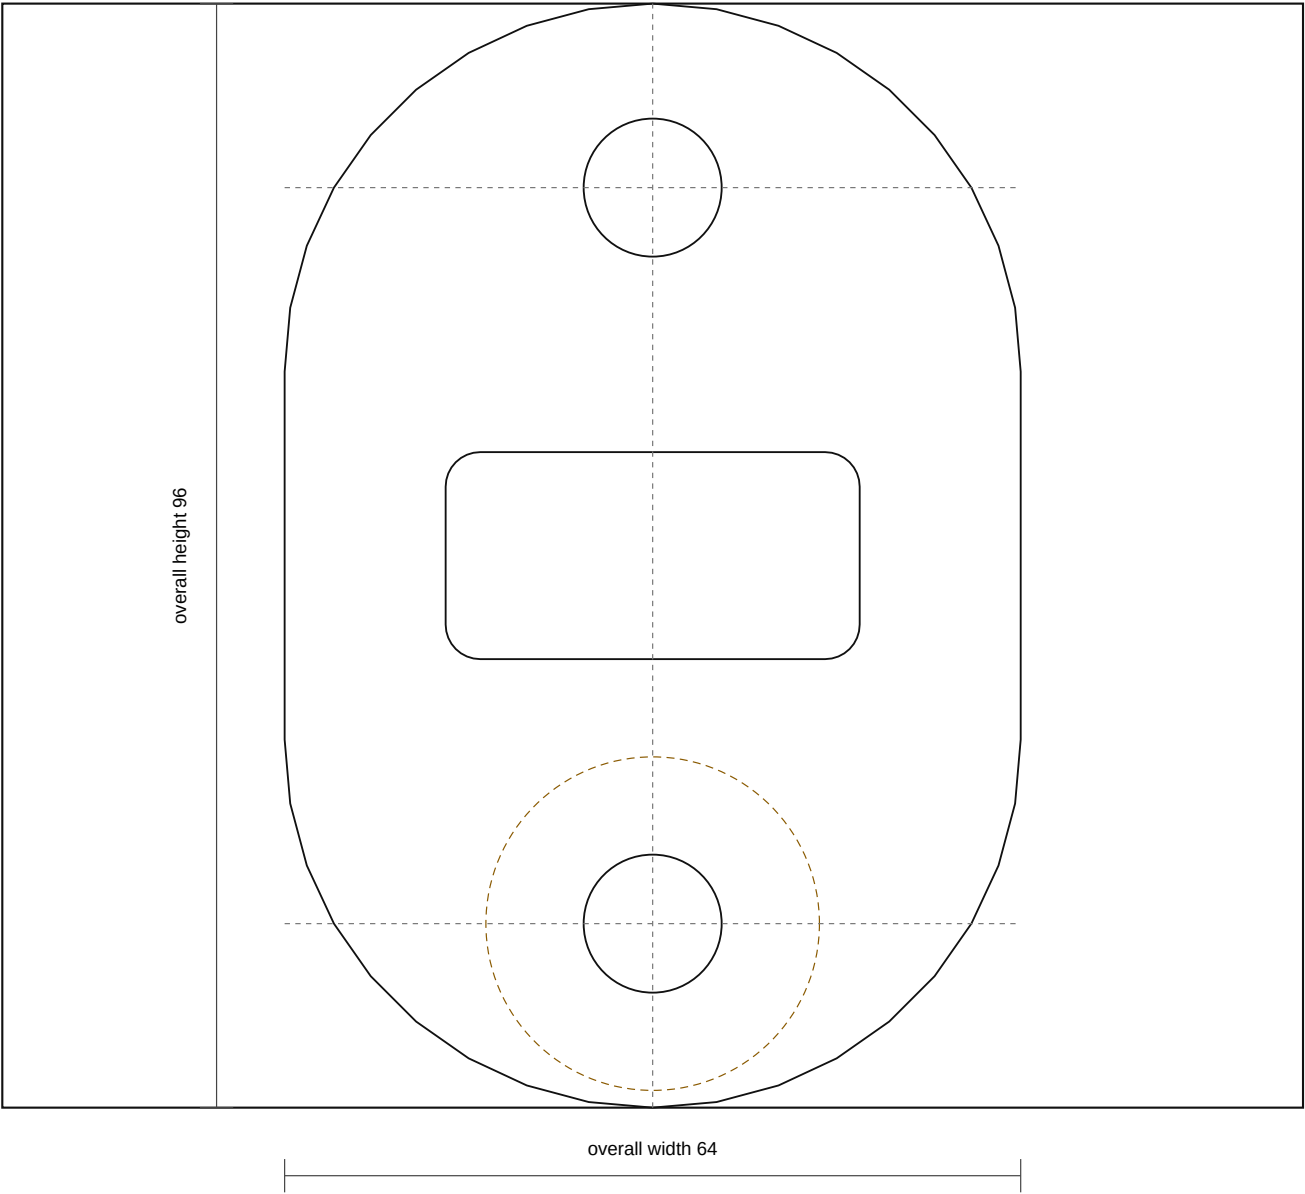

Part Control

- Quantity: 2 matched pieces
- Material: Black EPDM or NR/SBR, Shore A 60 +/-5; reuse/bond steel insert
- Release: prototype/quote; caliper-confirm holes and insert before batch
- DXF: fs_oval_front_support_pad_rev_a.dxf
- SVG: fs_oval_front_support_pad_rev_a.svg

Fabrication Notes

- Overall 96 x 64 with two 12 mm holes on 64 mm centre spacing.
- The 36 x 18 R3 relief is shown as a cut/pocket control. Confirm whether it is through-cut or blind relief on the physical part.
- Top 29 mm insert/boss mark is not a through cut. Reuse or reproduce the metal insert if the original design uses one.
- Make the two pads as a matched pair and dry-fit the front support before accepting the batch.


DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/Form/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

Output: j40_rubber_recreation_rev_a_dimension_sheet.pdf

FS-STRIP-L underfloor body-support strip first-article blank

Rev A | units: mm | rubber recreation fabrication pack



Part Control

- Quantity: 1
- Material: 8 mm EPDM or NR/SBR plain strip, Shore A 60 +/-5
- Release: released plain 420 x 38 x 8 first article; local end trim only after dry
- DXF: fs_strip_left_template_blank_rev_a.dxf
- SVG: fs_strip_left_template_blank_rev_a.svg

Fabrication Notes


- May 17 ruler photos show about 16.5 in old-strip length; release first article at 420 L x 38 W x 8 T mm.
- No rubber holes or slots by default. Do not copy steel-retainer slots into the rubber.
- Dry-fit controls only local end trim and side orientation.
- Reuse or trace the slotted steel retainer separately if it must be remade.

DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/FORM/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

FS-STRIP-R underfloor body-support strip first-article blank

Rev A | units: mm | rubber recreation fabrication pack



Part Control

- Quantity: 1
- Material: 8 mm EPDM or NR/SBR plain strip, Shore A 60 +/-5
- Release: released plain 420 x 38 x 8 first article; local end trim only after dry
- DXF: fs_strip_right_template_blank_rev_a.dxf
- SVG: fs_strip_right_template_blank_rev_a.svg

Fabrication Notes


- May 17 ruler photos show about 16.5 in old-strip length; release first article at 420 L x 38 W x 8 T mm.
- No rubber holes or slots by default. Do not copy steel-retainer slots into the rubber.
- Dry-fit controls only local end trim and side orientation.
- Reuse or trace the slotted steel retainer separately if it must be remade.

DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/FORM/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

EXH-HGR-90917 teardrop exhaust cushion

Rev A | units: mm | rubber recreation fabrication pack

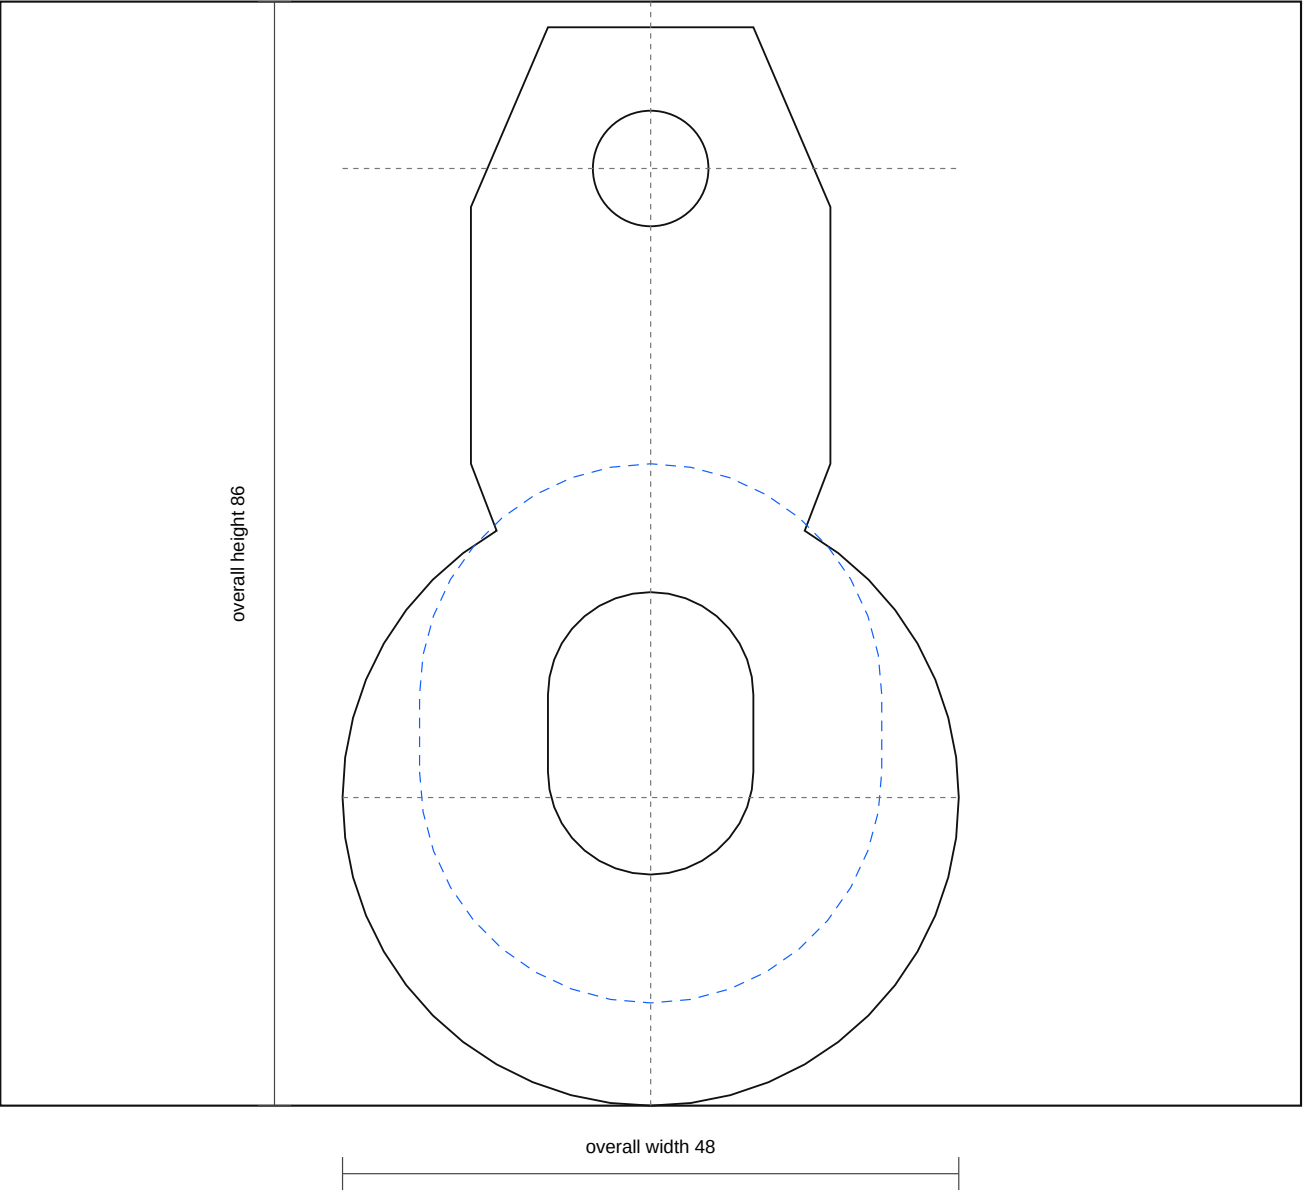

Part Control

- Quantity: as fitted
- Material: Black heat/vibration-resistant molded exhaust-hanger rubber, Shor
- Release: style identified from vehicle photos and reference part shape; sour
- DXF: exh_hgr_90917_08004_teardrop_rev_a.dxf
- SVG: exh_hgr_90917_08004_teardrop_rev_a.svg

Fabrication Notes

- Toyota 90917-08004 / 17572-92000 is a reference shape only. This replaces the earlier generic ring/strap placeholders.
- Nominal 2D control: 48 mm wide x 86 mm high; lower rubber bulb R24 centred at X24 Y24; top mounting lug on centreline.
- Mounting hole: diameter 9 at X24 Y73. Hanger slot: 16 x 22 capsule centred at X24 Y29. Raised boss/recess mark: 36 x 42 capsule.
- Finished rubber body thickness target 22 mm unless the bought/genuine sample proves another value. Reproduce any bonded/internal metal reinforcement.
- Local fabrication needs a genuine part or intact original for final mould depth, side profile, thickness, reinforcement, and metal insert detail.

DXF layer meaning

- CUT/CUT_BORE/DRILL: through cut or through hole
- RECESS/Form/INSERT_MARK: mark, form, boss, or pocket control
- TEMPLATE: quote/trace guide, not final cut without physical trace
- CENTER: construction centerline only

Output: j40_rubber_recreation_rev_a_dimension_sheet.pdf