


relay_base_plate_rev_d

Rev D | Units: mm | Site-fit fabrication sheet

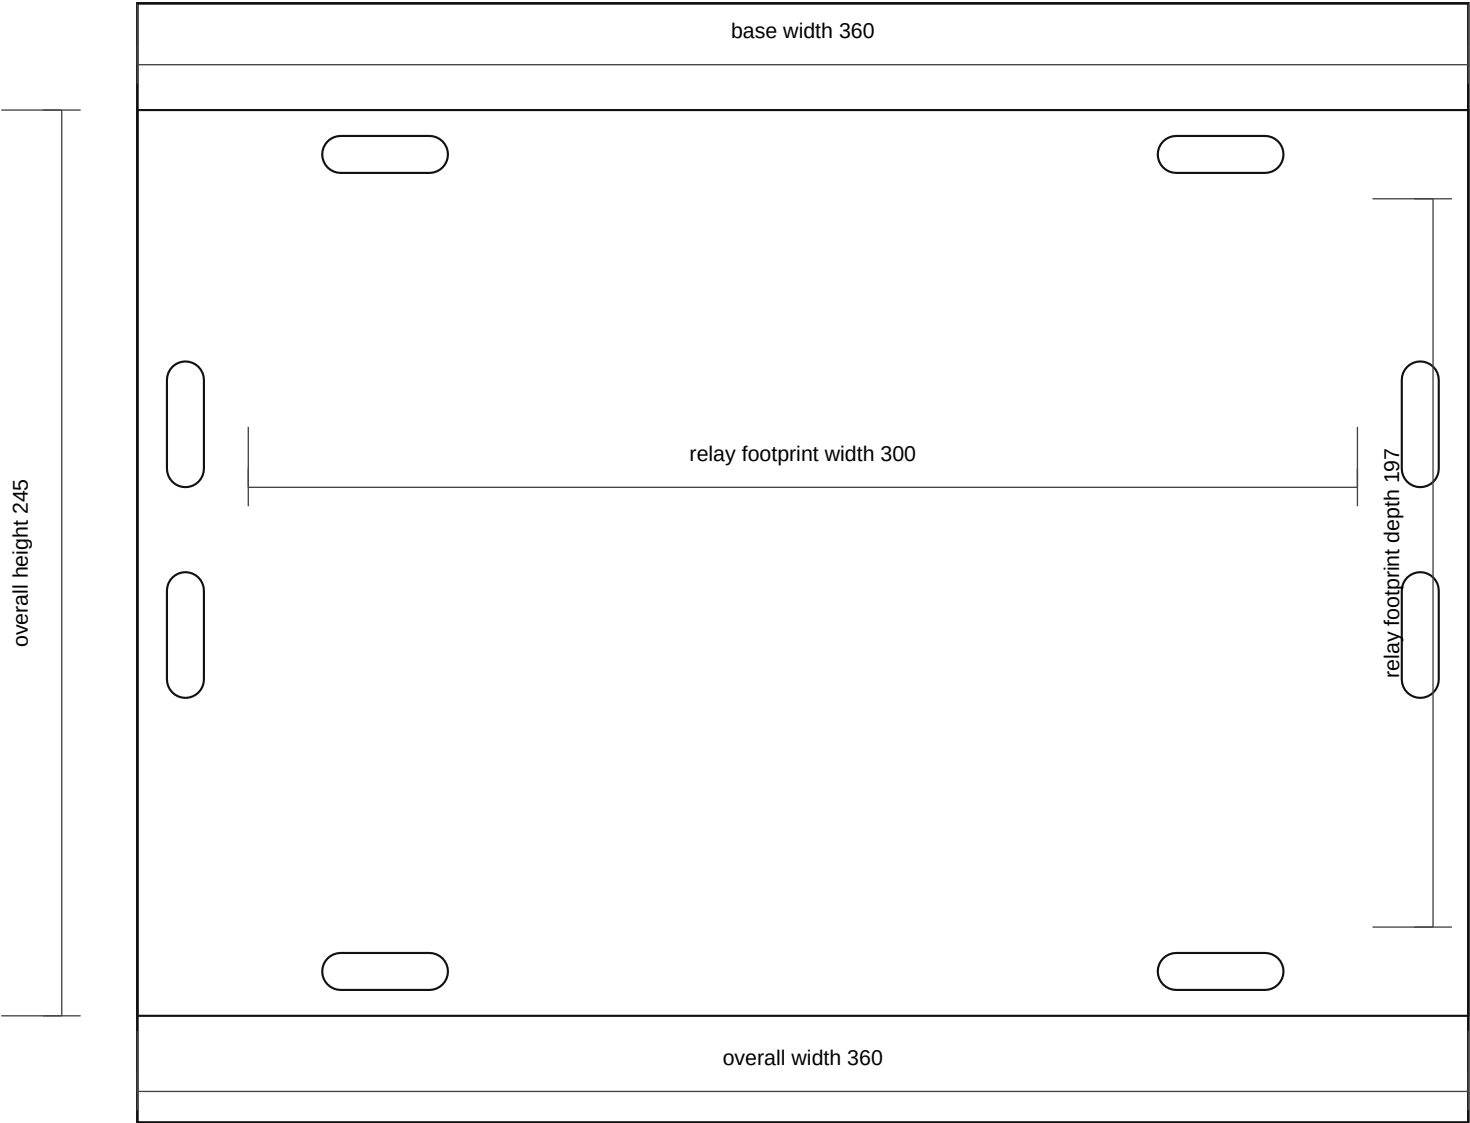


Fabrication Notes

- Relay Rev D base plate: flat 3.0 mm 5052-H32 aluminium.
- No folded box or rear tray is required because the relay unit is already a covered plastic enclosure.
- Base plate is 360 x 245 mm, giving exposed mounting margins around the 300 x 197 mm large uncovered bottom face of the relay box.
- The slotted holes attach this base plate to a removable electrical plate on the structural radiator/cooling-stack carrier. Never attach it to the radiator core, fins, tanks, necks, seams, or through-core rods. Final slot selection and bolt size are site-fit.
- Transfer any relay-box bottom-face fixing holes from the actual relay box after placing the exact-size insulating sheet. Do not pre-drill relay housing holes from this drawing.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: relay_base_plate_rev_d.dxf
- SVG: relay_base_plate_rev_d.svg

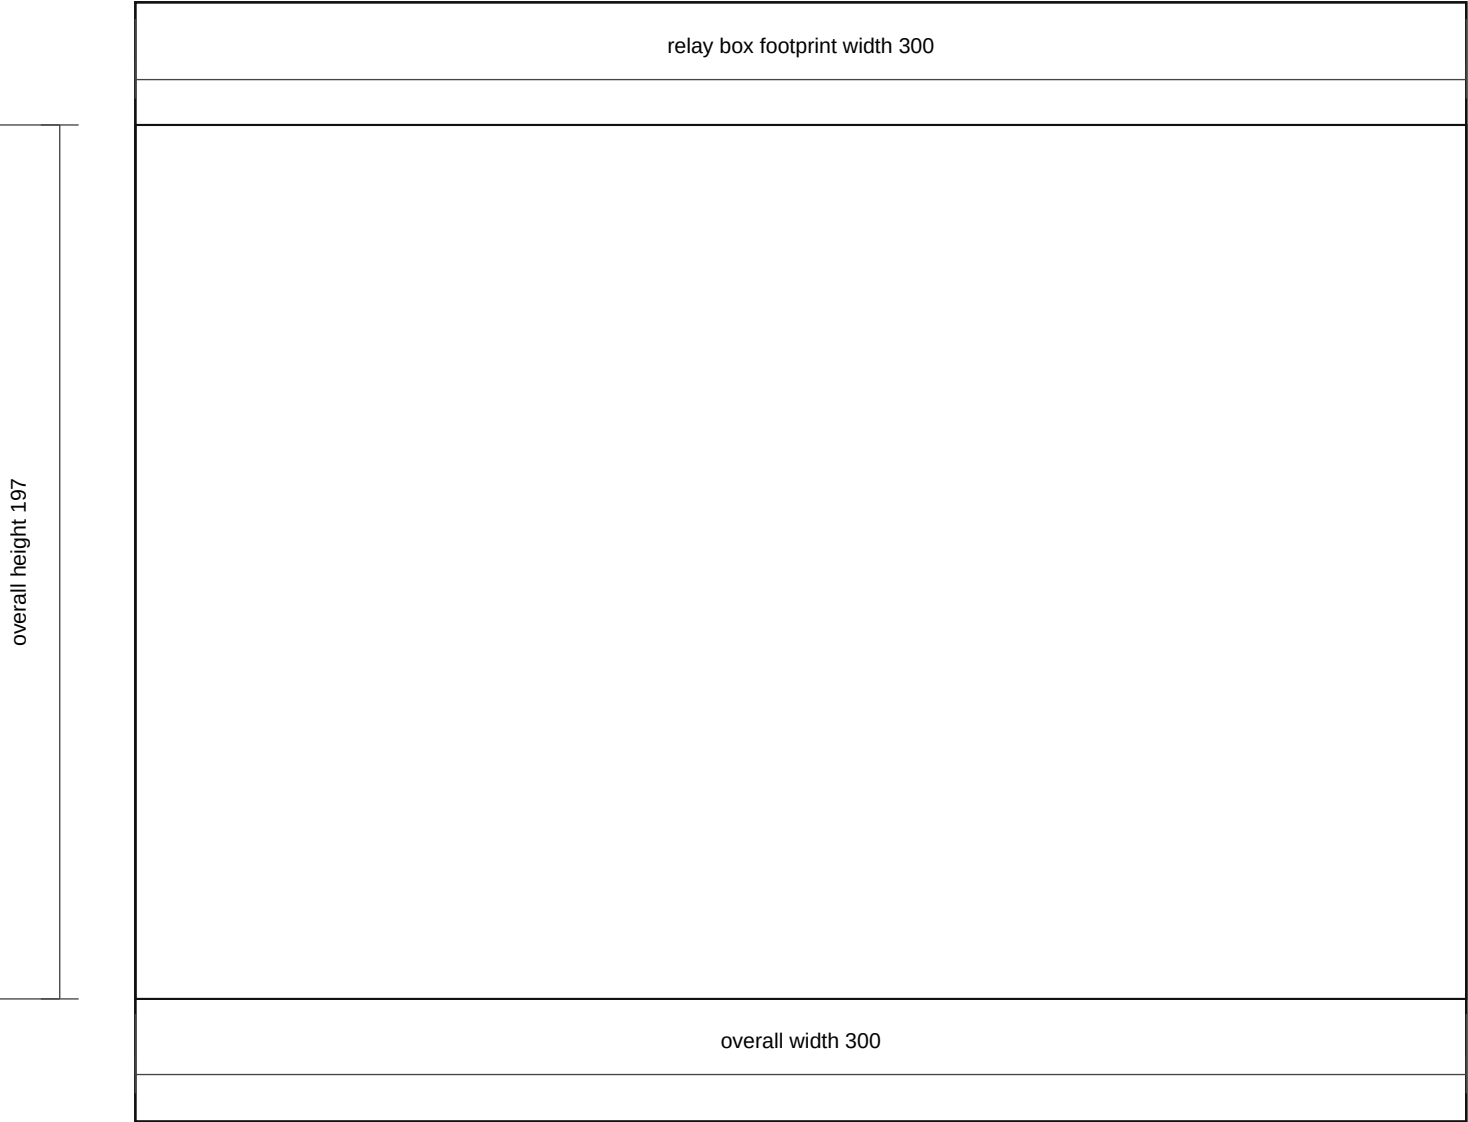

Fabrication Notes

- Relay Rev D insulating sheet: exact 300 x 197 mm footprint for the relay box's large uncovered bottom face in 3.0 mm ABS, HDPE, polypropylene, G10, or phenolic.
- This sheet sits directly between the relay box's uncovered bottom face and the aluminium base plate.
- Use the actual relay box bottom to mark any through-fixing holes after confirming orientation. Keep the sheet full-size under the relay box's uncovered bottom face.
- Deburr plastic edges and avoid a fully sealed water trap; the relay box remains the weather cover.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: relay_insulating_sheet_rev_d.dxf
- SVG: relay_insulating_sheet_rev_d.svg