

midi5_enclosure_body_rev_d


Rev D | Units: mm | Site-fit fabrication sheet


Fabrication Notes

- MIDI Rev D enclosure body: 3.0 mm 5052-H32 aluminium. Finished floor 210 x 165 with 65 mm folded side walls.
- This replaces the open Rev C plate route with a covered aluminium box around the full five-holder MIDI bank.
- Output side has five grommet pilot holes: four 16 mm holes plus one far-side 28 mm hole for the output that carries two power cables.
- Input/bus side has one 20 mm grommet pilot hole aligned to the second-from-last holder, where the cutoff-switched feed lands on the bus bar.
- Open pilot holes only as far as needed for the final cable and rubber grommet OD; deburr both sides and fit edge-safe grommets before wiring.
- Hinge holes are on the input/bus side; latch holes are on the output side so the lid can open without disturbing the branch wires.
- Bend all blue dashed lines to 90 degrees.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_enclosure_body_rev_d.dxf
- SVG: midi5_enclosure_body_rev_d.svg

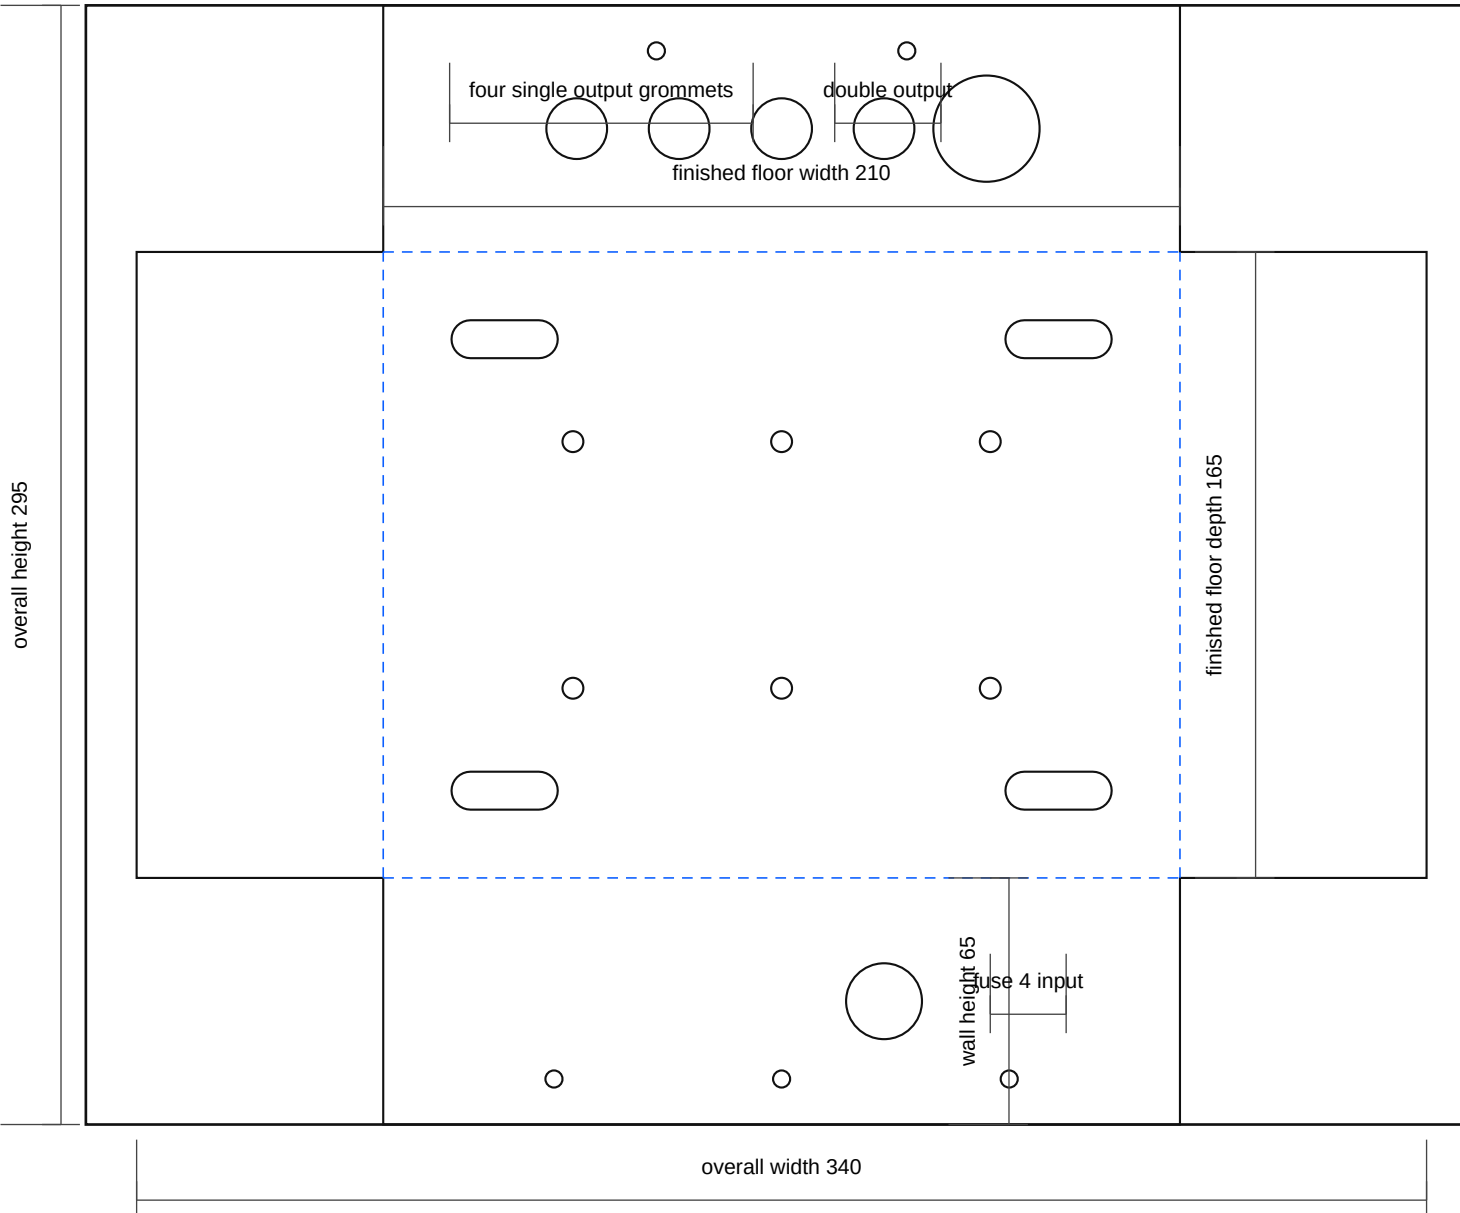

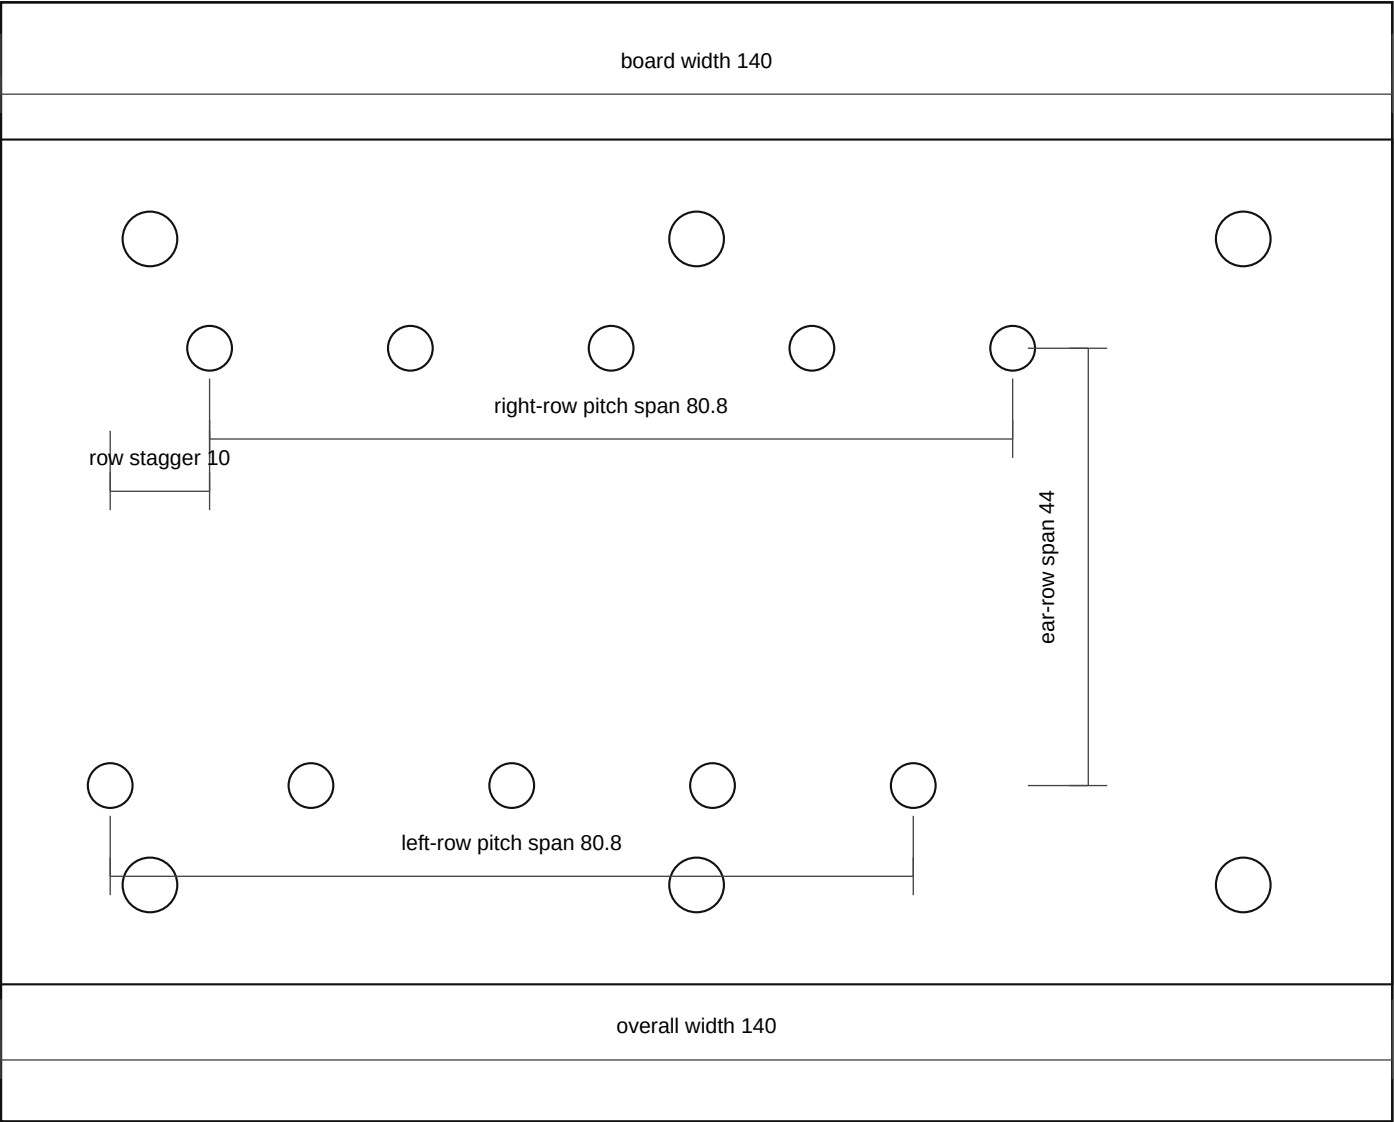


Fabrication Notes

- Holder subplate: 5.0 mm HDPE, ABS, G10, or phenolic. This board keeps the MIDI holders insulated from the aluminium enclosure.
- Ten holder fixing holes reuse the measured linked-holder pattern from Rev C: about 20.2 mm pitch, 44 mm row separation, and 10 mm row stagger.
- The six larger holes mount the subplate to the enclosure floor on 10-12 mm insulated standoffs.
- The second-from-last holder is the planned power input/bus-bar feed position; the opposite side carries five fused outputs.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_holder_subplate_rev_d.dxf
- SVG: midi5_holder_subplate_rev_d.svg

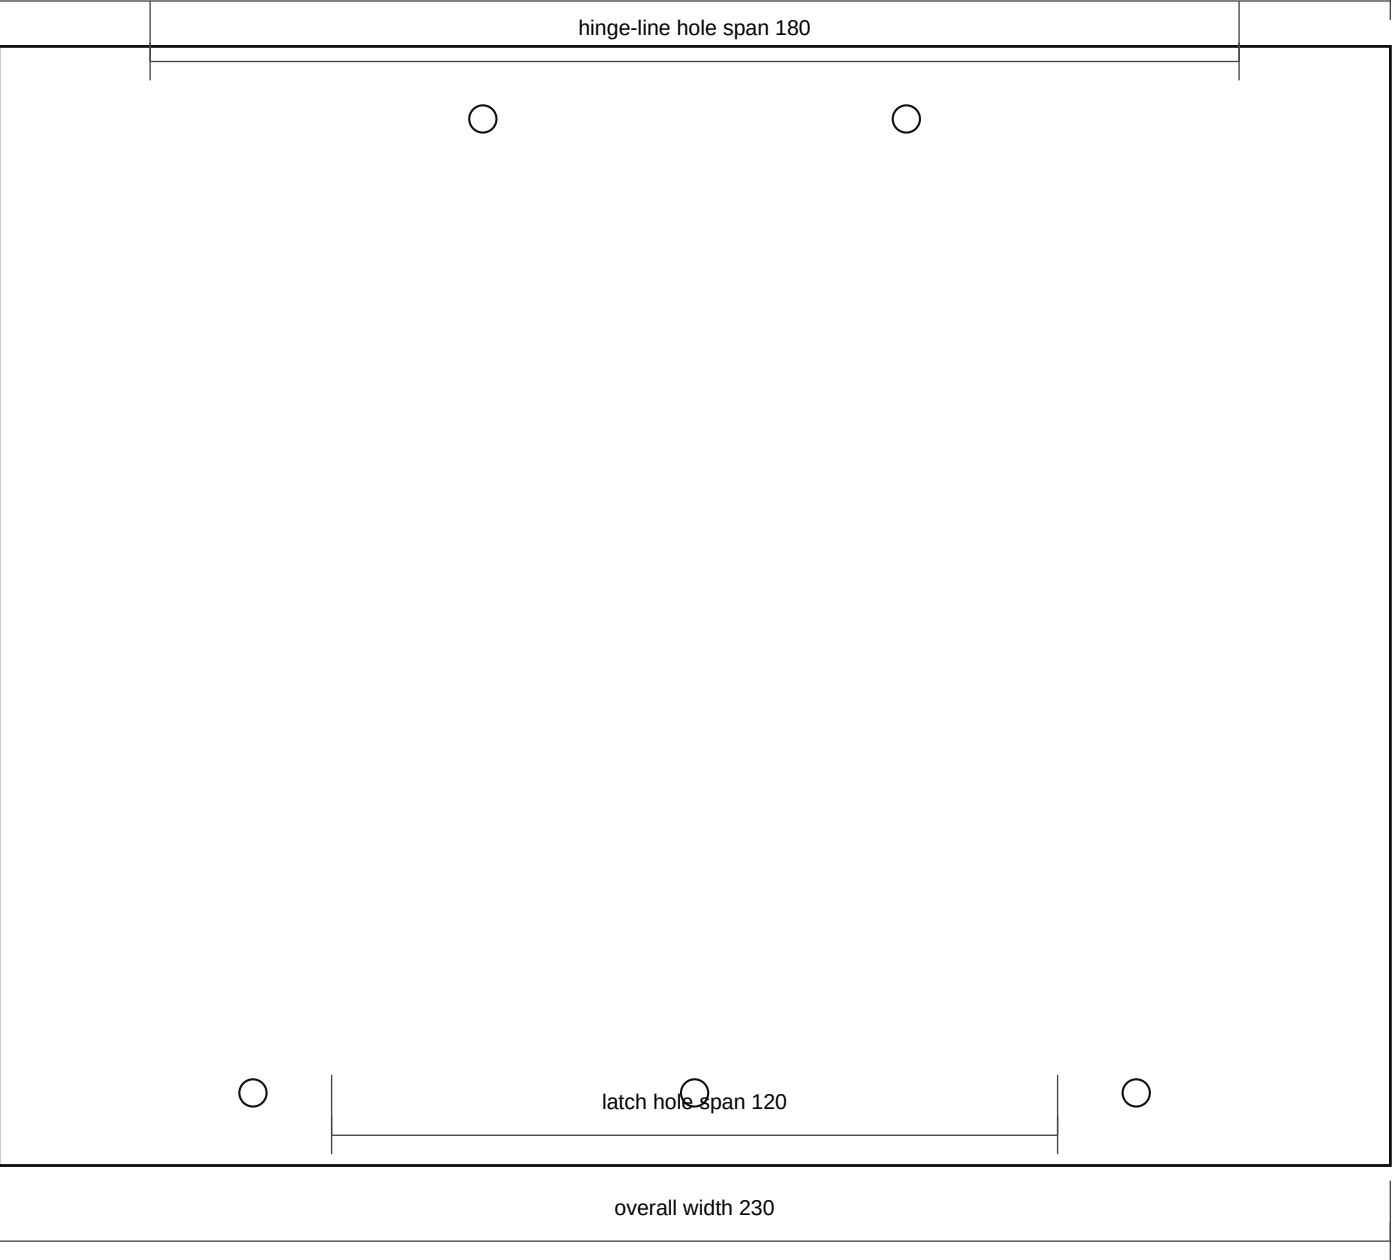

Fabrication Notes

- Hinged lid: 2.0-3.0 mm aluminium. Finished panel 230 x 185 gives about 10 mm overlap around the Rev D box body.
- Hinge edge is the input/bus side; latch or thumb-screw edge is the output side.
- Use a small continuous hinge or two compact hinges. Keep hinge screws clear of the input cable grommet and bus-bar feed lug.
- Add thin closed-cell foam or rubber edge strip if rattle or splash sealing becomes an issue; do not seal so tightly that water cannot drain.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_enclosure_lid_rev_d.dxf
- SVG: midi5_enclosure_lid_rev_d.svg