


midi5_module_box_rev_b

Rev B | Units: mm | Site-fit fabrication sheet

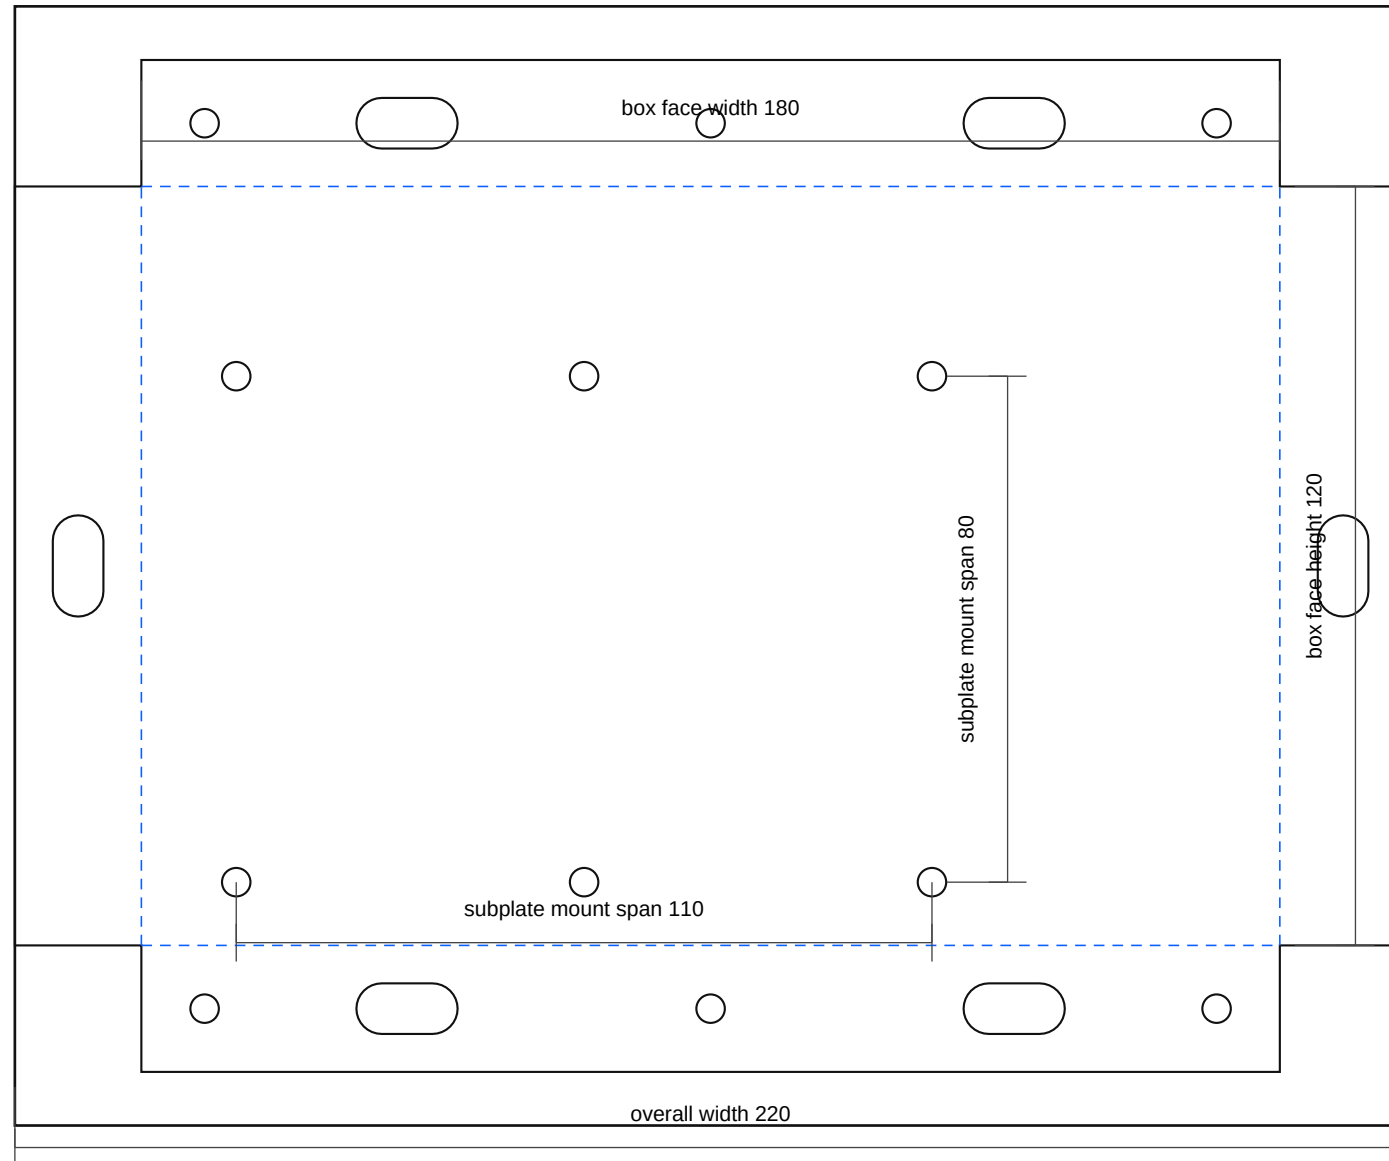


Fabrication Notes

- 5-way MIDI-only module box: 3.0 mm 5052-H32 aluminium. Finished face 180 x 120. Flanges 20 mm back.
- This Rev B shell is tightened around the measured five-holder pack; breaker/cutoff remains a separate part elsewhere.
- Six face holes mount the non-conductive holder subplate on stand-offs.
- Vehicle-side pickup slots remain slotted for site-fit to the repaired inner-wing / tray structure.
- Bend all blue dashed lines to 90 degrees.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_module_box_rev_b.dxf
- SVG: midi5_module_box_rev_b.svg

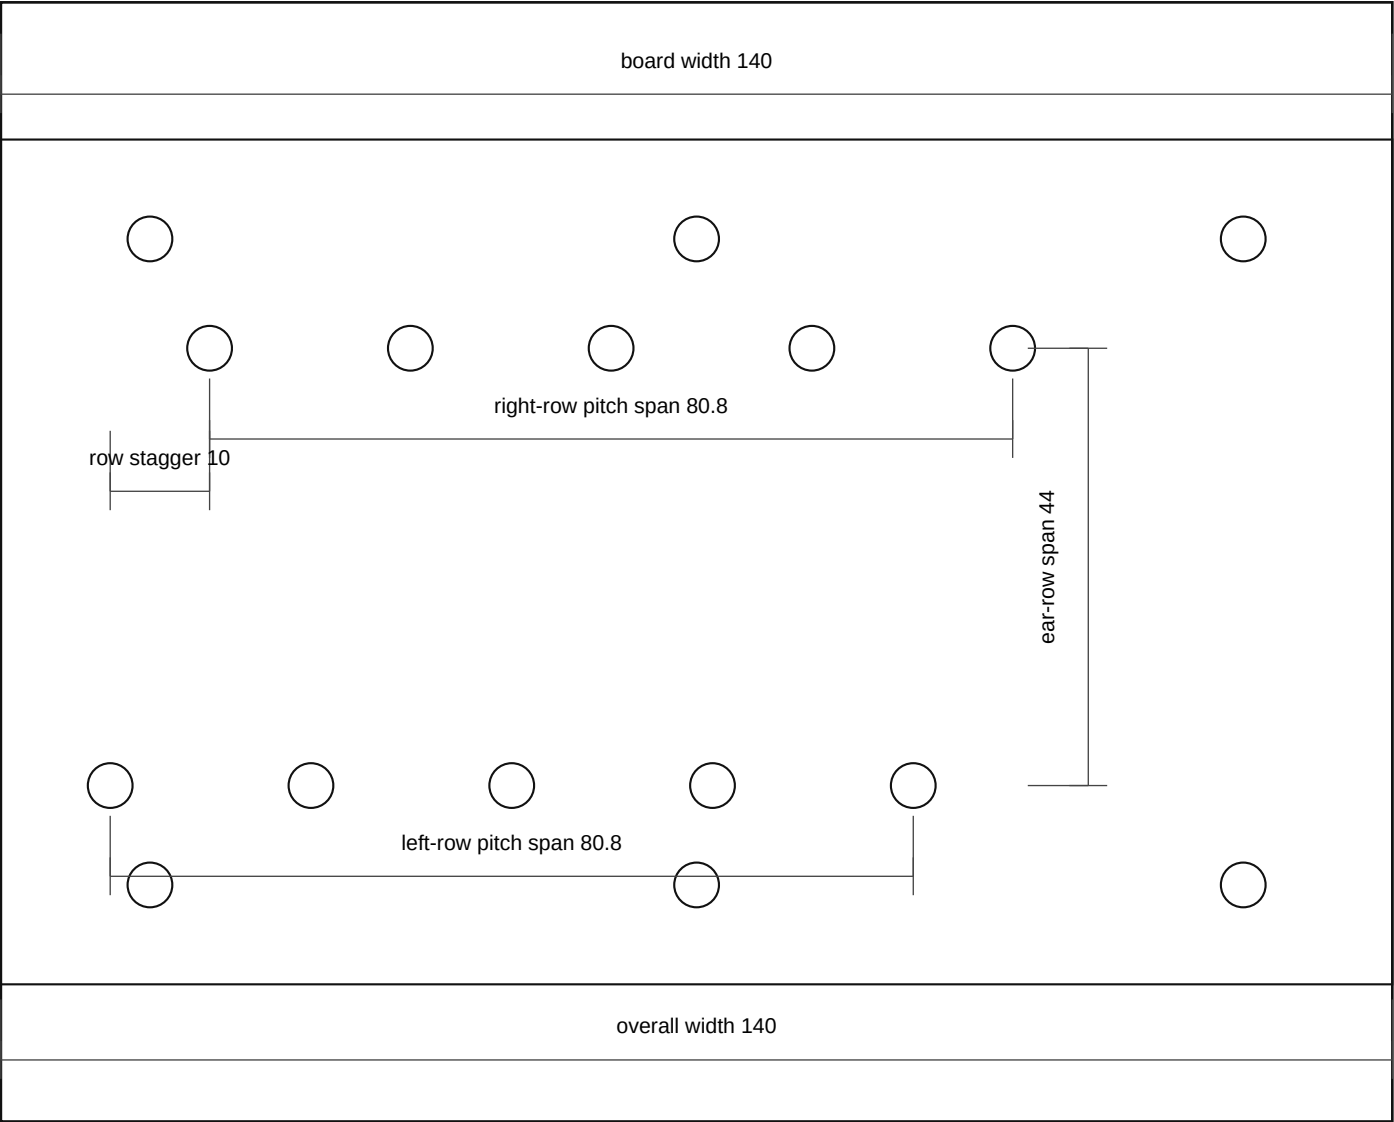

Fabrication Notes


- Holder subplate: 5.0 mm HDPE, ABS, G10, or phenolic. This board carries the five linked MIDI holders.
- Ten holder fixing holes are based on the tape-photo measurements: five positions on about 20 mm pitch, with about 44 mm ear-row separation.
- The left and right ear rows are staggered by about 10 mm, matching the offset visible in the linked-holder photos.
- The fuse-holder ears are already slotted, so the board can use round 4.5 mm fixing holes.
- If your measured final pitch differs by more than 1 mm, update this board only; the metal shell can stay unchanged.
- Bend all blue dashed lines to 90 degrees.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_holder_subplate_rev_b.dxf
- SVG: midi5_holder_subplate_rev_b.svg

midi5_module_rear_insulator_rev_b

Rev B | Units: mm | Site-fit fabrication sheet

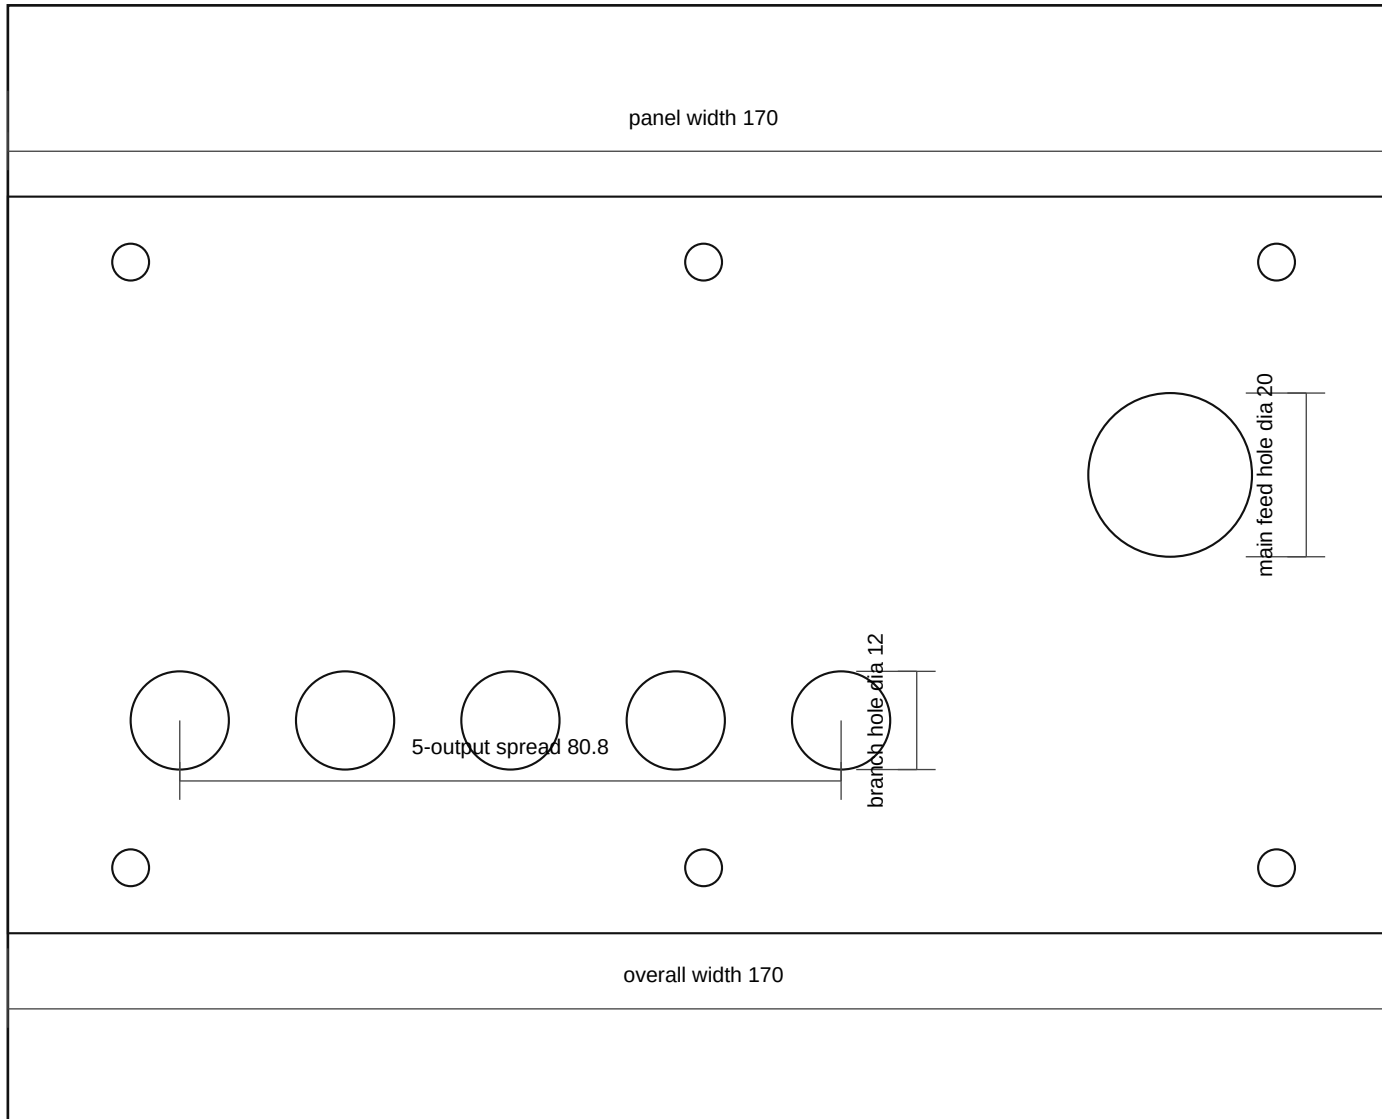

Fabrication Notes

- Rear insulator panel: 3.0 mm ABS, HDPE, or polypropylene. Do not make this part from bare metal.
- Five 12 mm grommet pilot holes align with the five fused branch positions behind the linked holder row.
- One 20 mm grommet pilot hole is reserved for the single bus-bar feed into the linked MIDI bank.
- Hole diameters can still be opened up if your final cable and grommet combination needs more room.
- Bend all blue dashed lines to 90 degrees.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_module_rear_insulator_rev_b.dxf
- SVG: midi5 module rear insulator rev b.svg