
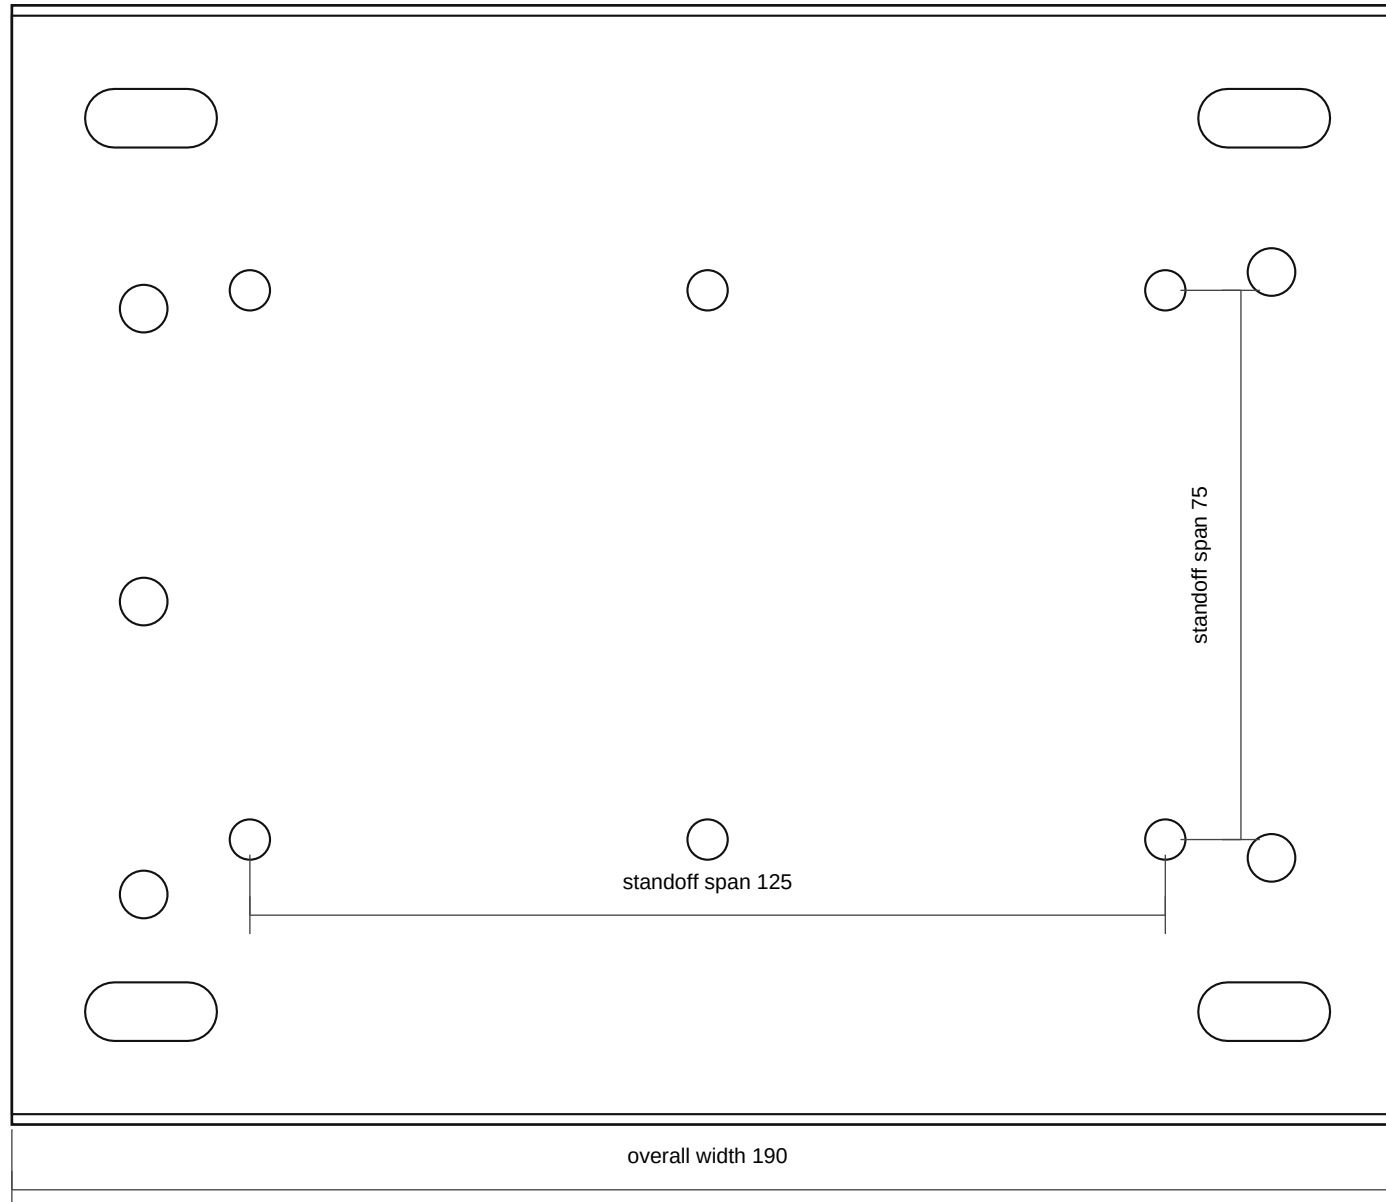


**Fabrication Notes**

- Open mount plate: 3.0 mm 5052-H32 aluminium. No rear box. This is intentional so the MIDI cables can leave in-plane without a forced rearward bend.
- Use 10-12 mm nylon or aluminium spacers between this plate and the holder subplate.
- The small 6.5 mm holes near the cable sides are for optional P-clips or saddle clamps to support heavy cables after they leave the holders.
- Corner mount slots remain site-fit because the truck-side support structure is still being repaired and located.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_mount_plate_rev_c.dxf
- SVG: midi5_mount_plate_rev_c.svg

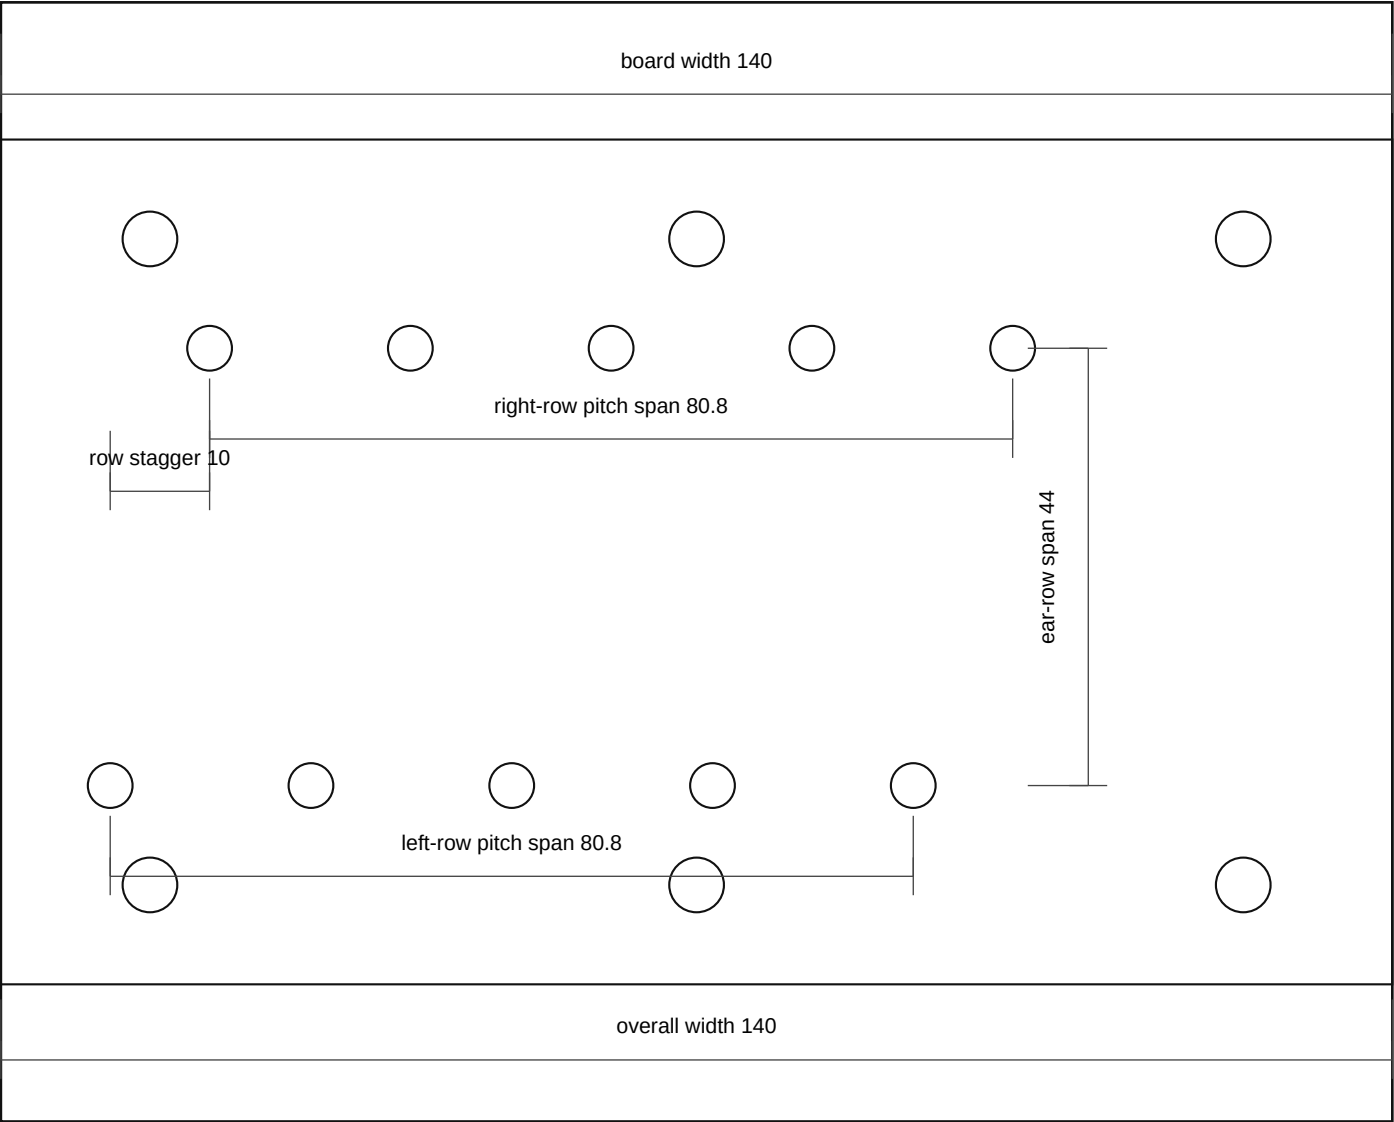

Fabrication Notes

- Holder subplate: 5.0 mm HDPE, ABS, G10, or phenolic. This board carries the five linked MIDI holders.
- Ten holder fixing holes are photo-derived from your measured linked-holder pack: about 20.2 mm pitch, about 44 mm row separation, about 10 mm row stagger.
- The six larger holes are for the standoffs that mount this board to the aluminium plate.
- Because the holder ears are already slotted, these can stay as round holes on the board.
- No bends in this part.
- Truck-side pickup slots stay provisional until tray repair and site-fit.
- Confirm actual component hole positions against the parts in hand before final paint or powder.

Output Files

- DXF: midi5_holder_subplate_rev_c.dxf
- SVG: midi5_holder_subplate_rev_c.svg