


# NS-WSG v1 sound card - placement design render, 1:1. PRINT AT 100% LANDSCAPE.

Component side view, edge fingers at LEFT (even pins face you). Gold = plated, outline = unplated position.



ruler: 0.125" ticks, 1" long ticks

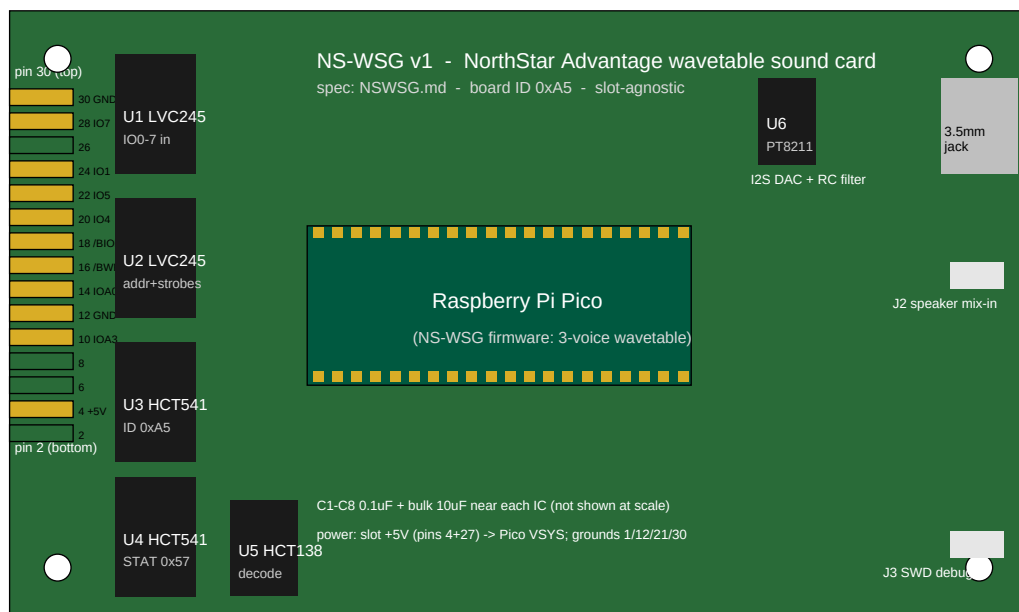

Signal flow: fingers -> U1/U2 (5V->3.3V) -> Pico PIO (writes only) | /IO REQ -> U3 grounds IO1/3/4/6 (=0xA5) | SELECT+BRD+A=3 -> U4 drives 0x57

The Pico never drives the slot bus. U5 gates the two read constants. Audio: PWM/I2S -> jack + speaker mix-in header.

All DIP positions socketed for bring-up. Outline/holes/connector geometry copied from the verified SIO measurements.