



---

**Low duty cycle operation with the SPIRIT1 transceiver**

---

**By Michele Sardo**

## **Introduction**

The SPIRIT1 is a very low power RF transceiver, intended for RF wireless applications in the sub-1 GHz band. It is designed to operate both in the license-free ISM and SRD frequency bands at 169, 315, 433, 868, 915 and 920 MHz.

This application note describes how to use the low duty cycle (LDC) mode in order to further optimize power consumption during reception and transmission operation.

# Contents

- 1      Overview of low duty cycle mode ..... 3**
  - 1.1    LDC reception mode ..... 3
    - 1.1.1    RX timeout using sync detection ..... 4
    - 1.1.2    RX timeout using RSSI ..... 5
    - 1.1.3    Current consumption figures ..... 6
  - 1.2    Programming tips ..... 8
  
- 2      Reference ..... 9**
  
- 3      Revision history ..... 9**



# 1 Overview of low duty cycle mode

The SPIRIT1 includes hardware support to manage low duty cycle operation that can be used in two ways:

1. To reduce average power consumption during receive operations
2. To build a synchronized star network where both transmitter and receiver can sleep periodically to reduce average power consumption

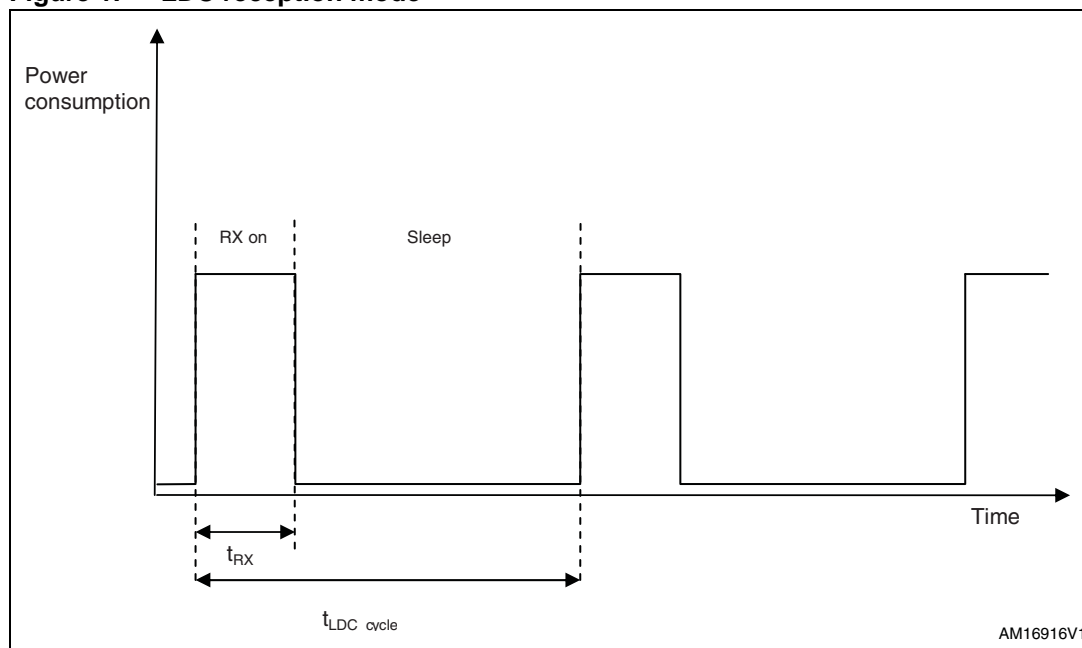
LDC mode is essentially controlled by two timers:

1. The LDC timer which defines the window where the duty cycle operation take place
2. The RX\_TIMEOUT timer which defines the amount of time that the receiver is active

## 1.1 LDC reception mode

In this mode, the SPIRIT1 can periodically switch on the receiver to check if a packet is being transmitted, and then go back to sleep in order to save power. This mode allows the reduction of average reception power consumption, while allowing the device to continue receiving packets under certain conditions.

**Figure 1. LDC reception mode**



In this mode, the user defines an operation cycle ( $t_{LDC\_cycle}$  in [Figure 1](#)) whose max length is about 2 seconds with a step of 29  $\mu$ s. In the  $t_{LDC\_cycle}$  period, a period is also defined where the receiver is automatically turned on for packet reception ( $t_{RX}$  in [Figure 1](#)).

In this mode, users can set the duration of the  $t_{LDC\_cycle}$  and the  $t_{RX}$ , in order to reduce average power consumption based on the target application.

The average current consumption, in mA for the SPIRIT1, is calculated using [Equation 1](#):

**Equation 1**

$$RX_{\text{consumption\_average}} = \frac{t_{RX}}{t_{LDC\_cycle}} \cdot 9 + \frac{t_{LDC\_cycle} - t_{RX}}{t_{LDC\_cycle}} \cdot 0.00085 \text{ mA}$$

The following example shows how to set up the SPIRIT1 with a specific duty cycle.

Assuming that the application is using a  $t_{LDC\_cycle}$  of 100 ms and a  $t_{RX}$  of 10 ms, the average RX current consumption will be:

$$\frac{10}{100} \cdot 9 + \frac{100 - 10}{100} \cdot 0.00085 = 0.9 \text{ mA}$$

The registers to configure the SPIRIT1 timers are as described in [Table 1](#).

**Table 1. LDCR and RX\_TIMEOUT prescaler and counter settings**

Register name	Register address	Register value	Comment
LDCR_PRESCALER	0x55	0x26	Assuming RCO clock of 34.7 kHz
LDCR_COUNTER	0x56	0x58	
RX_TIMEOUT_PRESCALER	0x53	0x2A	Assuming 26 MHz digital domain clock
RX_TIMEOUT_COUNTER	0x54	0x04	

### 1.1.1 RX timeout using sync detection

In this mode, the RX timeout is stopped when a valid SYNC word, which marks the beginning of the packet, is received and the receiver is expected to receive a complete packet. When the receiver is working in LDC mode, the transmitter should take this into account, retransmitting the packet for a period of time at least equal to  $t_{LDC\_cycle}$ , so that it is certain that the receiver has the opportunity to catch the SYNC word.

In addition, the  $t_{RX}$  needs to be selected according to the length of the packet to be received in order to ensure that a valid sync word is detected during the RX window.

The  $t_{RX}$  should be equal to the packet period plus the length of the preamble.

The packet period can be defined as follow:

$$t_{\text{packet\_period}} = (l_{\text{preamble}} + l_{\text{sync}} + l_{\text{packet}}) \cdot \text{datarate} + t_{\text{interpacket}}$$

where datarate is the bit rate at which the information is sent and the other equation parameters are according to [Table 2](#).

**Table 2. Packet period key parameters**

Name	Description
$l_{\text{preamble}}$	Length of the preamble in bits
$l_{\text{sync}}$	Length of the sync in bits

**Table 2. Packet period key parameters (continued)**

Name	Description
$l_{\text{packet}}$	Length of the packet in bits
$t_{\text{interpacket}}$	Delay between two consecutive transmissions; it is the cumulative time of interrupt response time, reload of the TX fifo, send TX command, ready to TX transition.

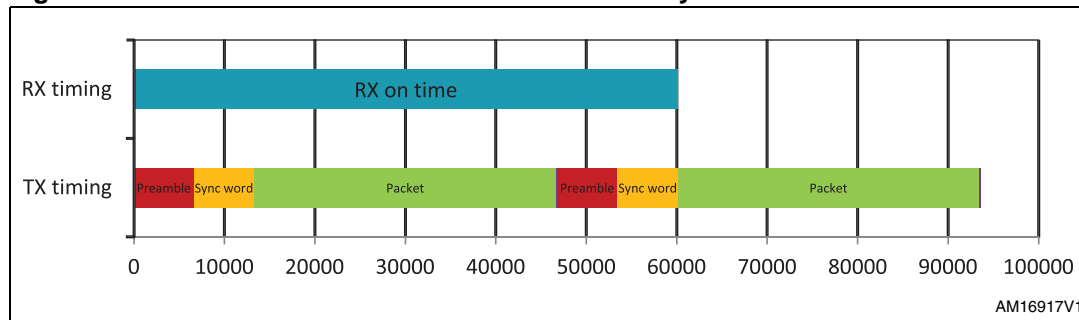
Finally, the parameter  $t_{\text{RX}}$  can be set based on the following equation:

**Equation 2**

$$t_{\text{RX}} \geq t_{\text{packet\_period}} + (l_{\text{preamble}} + l_{\text{sync}}) \cdot \text{datarate}$$

This will ensure that a node doing RX in LDC mode will be able to receive a packet sent by a transmitter, which repeats the message for a certain period of time.

[Figure 2](#) shows the minimum RX ON time to ensure a valid sync is captured.

**Figure 2. RX on minimum time for RX timeout on sync**

The transmitter needs to repeat the packet to be transmitted for at least  $t_{\text{LDC\_cycle}}$ . From this we can see how the consumption of the receiver is reduced at the expenses of increasing the consumption on the transmitter side and increasing the latency of response. This may be perfectly acceptable and desirable, for example, in applications where the receiver is battery-operated and the transmitter is powered by mains.

**1.1.2 RX timeout using RSSI**

In this mode, the receiver timeout is stopped upon detection of signal energy above a certain user defined threshold. This mode will further reduce average power consumption by decreasing the time when receiver must be on. On the other hand this mode will add some further burden on the micro which needs to check that a valid message is received within a user defined timeout.

In this mode, the SPIRIT1 cycles between RX active and sleep as described in [Figure 1](#); the only difference is that the minimum time  $t_{\text{RX}}$  will be much smaller than that described in [Section 1.1.1](#). The time to measure RSSI of the incoming signal will vary according to the RX filter bandwidth shown in [Table 3](#).

**Table 3. RSSI detection time**

RX filter min (kHz)	RX filter max (kHz)	RSSI detection time (μs)	Comment
4.2	7.0	1800	7
7.0	14.0	950	6
14.0	28.0	550	5
28.0	56.1	346	4
56.1	112.3	280	3
112.3	224.7	175	2
224.7	450.9	90	1
450.9	800.1	34	0

Since in this mode the RX active time can be very short, it may be worthwhile to also take into account the time to move from the SLEEP state to the RX state, which is in the order of 120 μs.

An equation that approximates the average current consumption in this mode is as follows:

**Equation 3**

$$RX_{\text{consumption\_average}} = \frac{120^{-6} + t_{RX}}{t_{LDC\_cycle}} \cdot 9 + \frac{t_{LDC\_cycle} - t_{RX} - 120^{-6}}{t_{LDC\_cycle}} \cdot 0.00085 \text{ mA}$$

The equation assumes that there is an average current consumption of 9 mA during the transition from SLEEP to RX.

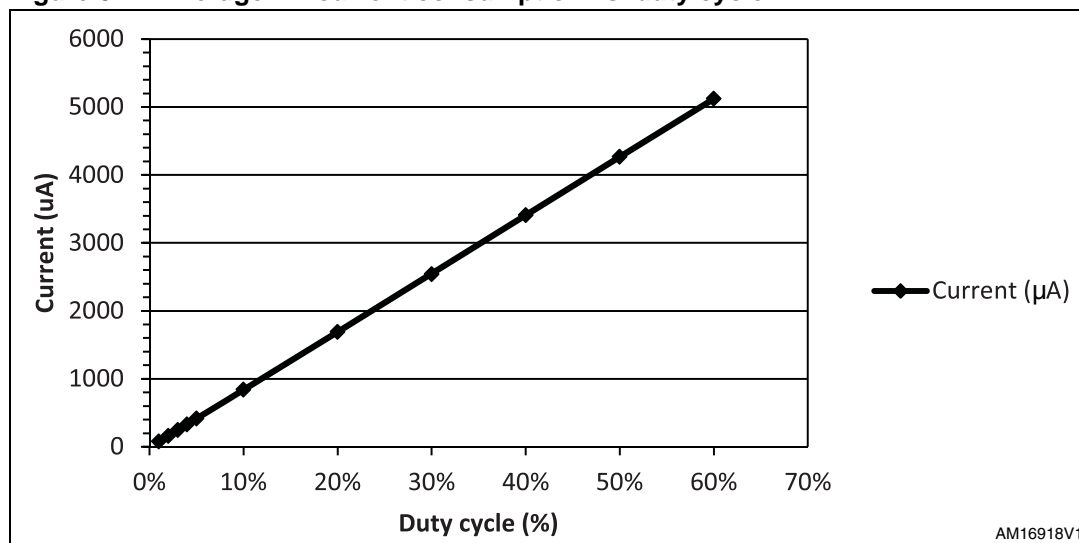
It is important to understand that this mode also requires some cooperation from the microcontroller driving the SPIRIT1. In particular, since the RX timeout is stopped upon detection of an RSSI value above a certain threshold, two cases can occur:

1. A valid packet is detected and the reception is completed and signaled to the micro
2. No packet is detected and the SPIRIT1 can stay indefinitely in the RX state

In order to avoid case 2, it is suggested that upon detection of the RSSI signal, the microcontroller starts a timer and then aborts reception if a valid packet is not received within a user-defined timeout.

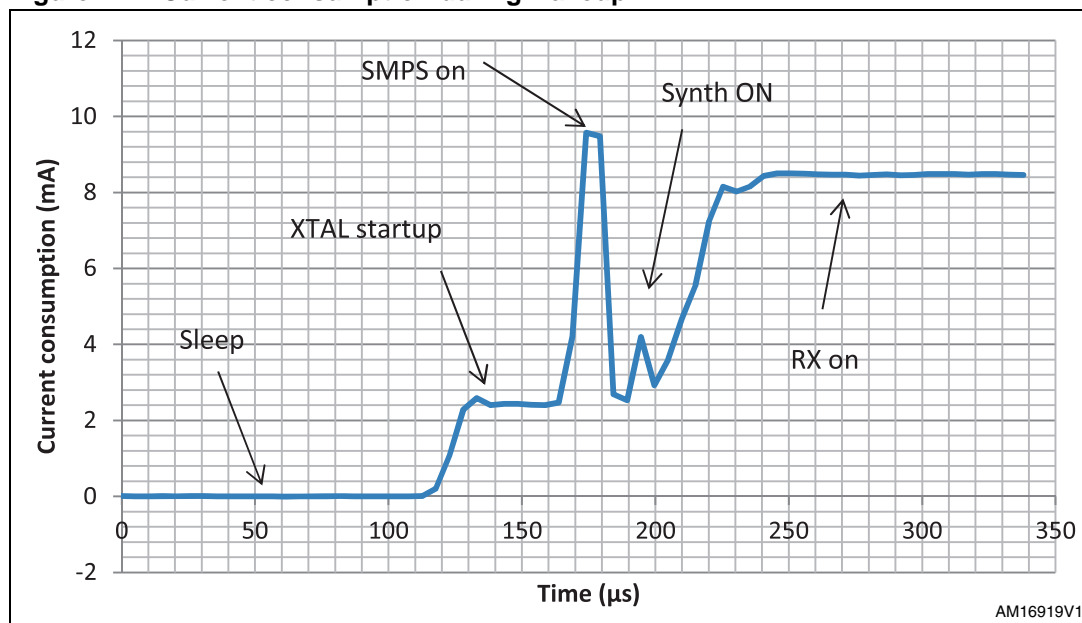
### 1.1.3 Current consumption figures

A set of measurements have been taken using an LDC cycle of 100 ms and a variable duty cycle. The values have been taken using an Agilent N6705B DC power analyzer and are plotted in [Figure 3](#). The actual values with comparison to predicted values are shown in [Table 4](#).

**Figure 3. Average RX current consumption vs. duty cycle****Table 4. Current consumption data with different duty cycles**

Duty cycle (%)	Current (µA)	Predicted value (µA)
1%	80.0372	90.84
2%	162.9491	171.83
3%	249.9657	257.32
4%	332.9219	342.82
5%	419.8115	428.31
10%	841.9774	855.77
20%	1690.3268	1710.68
30%	2541.7257	2565.60
40%	3410.6563	3420.51
50%	4267.8439	4275.43
60%	5120.7135	5130.34

Figure 4 shows the dynamic power consumption during the transition from sleep to RX.

**Figure 4. Current consumption during wakeup**

## 1.2 Programming tips

This section provides some indication of how to program the SPIRIT1 to perform RX in LDC mode.

Assuming that the transceiver has been properly initialized, the following steps are required to activate the LDC mode in reception using the SPIRIT C driver:

1. `SpiritTimerSetWakeUpTimerMs (LDC_CYCLE);` // Specify the LDC cycle time in ms
2. `SpiritTimerSetRxTimeoutMs (RX_TIMEOUT);` // Specify RX timeout in ms
3. `SpiritTimerLdcrMode(S_ENABLE);` // Enable LDC mode
4. `SpiritCmdStrobeRx(SPIRIT_CMD_RX);` // Start RX

The same commands can be performed as a set of registers access as follow (assuming an LDC cycle of 100 ms and a RX timeout of 1 ms and a crystal of 50 MHz):

1. `WriteRegister(0x55,0x26), WriteRegister(0x56,0x58)` # Set LDC cycle time
2. `WriteRegister(0x53,0x09), WriteRegister(0x54,0x02)` # Set Rx timeout
3. `WriteRegister(0x50, ReadRegister(0x50) | 1)` # Set bit 0 of register 50 to 1 to activate LDC mode
4. `SendStrobe (0x61)`



## 2 Reference

[1] SPIRIT1 datasheet.

## 3 Revision history

**Table 5. Document revision history**

Date	Revision	Changes
07-Jan-2013	1	Initial release.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)