


G1R+ v5 - DVN-65 ergonomic base candidate

ISO-ES | 6 deg per half | user-side opening | top-edge display | push rotary encoder

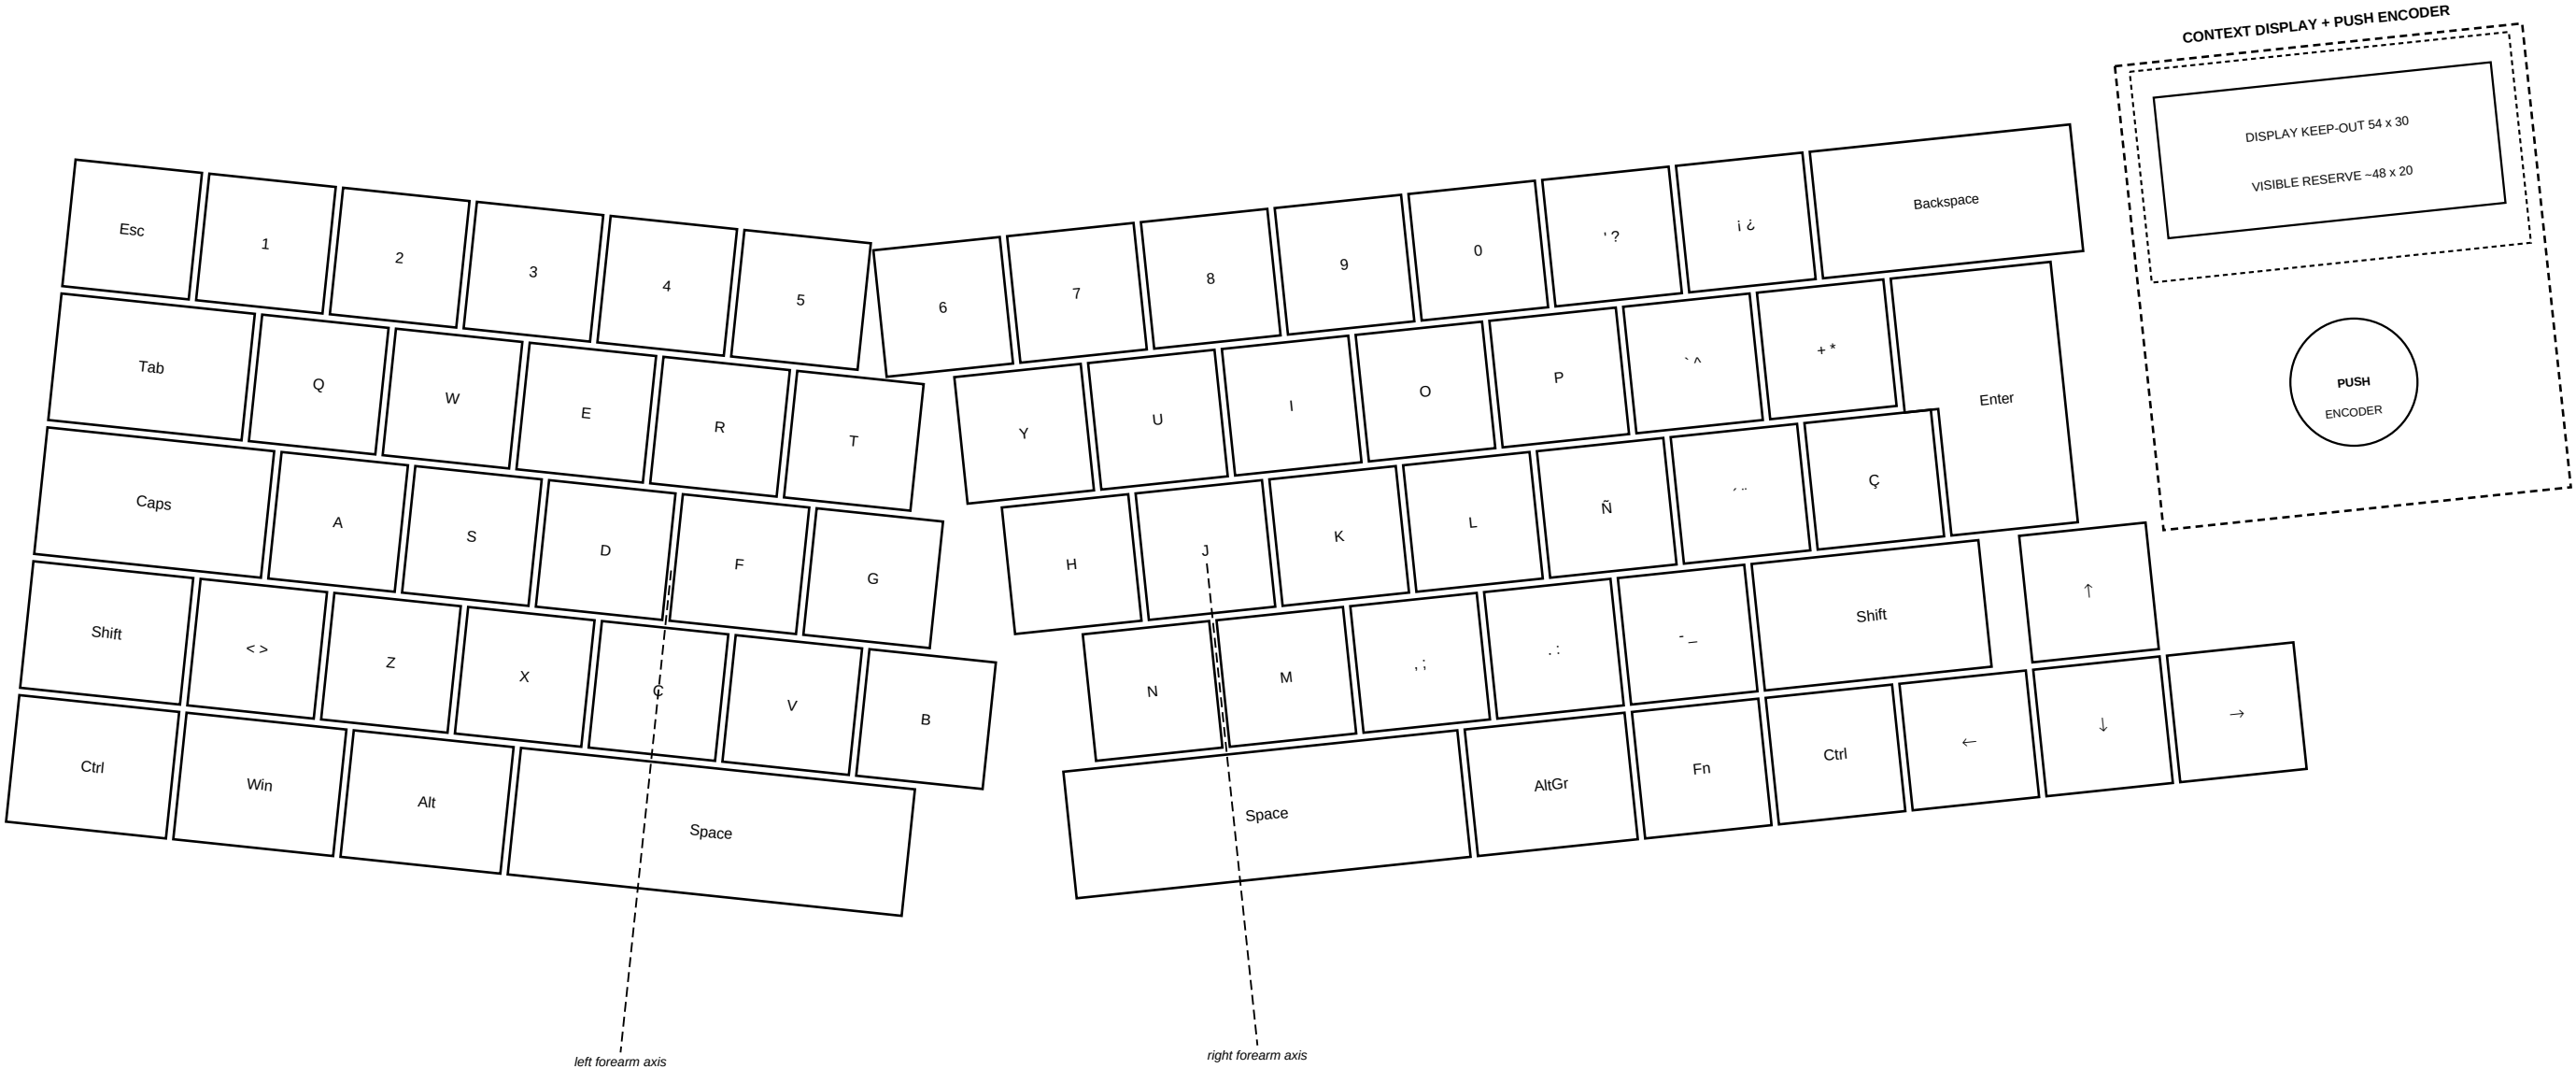

Geometry intent: preserve familiar ISO-ES row stagger while reducing wrist deviation with a mild 12 deg included opening.
The dedicated mode selector is removed. Context selection and display navigation use the push rotary encoder.
The display reserve is moved to the upper edge and enlarged: keep-out 54 x 30 mm; visible reserve about 48 x 20 mm.
Physical arrows remain. Fn+Backspace=Del; Fn+Left/Right=Home/End; Fn+Up/Down=PgUp/PgDn. Not PCB/case manufacturing data.

PRINT: Actual size / 100%. Verify the 100 mm bar before placing your hands on the template.

v5 freezes the layout/control concept only; PCB, switch footprints, stabilizers, case wall and final display module remain undecided.

